



Contents

Navigator cutting data	page	40
Solid carbide ratio drills	page	90, 168
T800 insert drilling system	page	104, 250
Twist drills	page	114, 312
Technical section	page	623
Product no. index	page	656

Exclusive Line

Specialists for specific tasks

Our price list no. 42 replaces all previous price lists. All prices in Euro plus surcharge and VAT. Re-production – even in part – is not permitted.

Possible misprints or any type of intermediate changes do not entitle to any claims. All DIN marked products can be supplied deviating from the catalogue dimensions as long as they correspond to the specified DIN standard.

Printed in Germany

Guehring KG
P.O. Box 10 02 47 · D-72423 Albstadt
Herderstrasse 50-54 · D-72458 Albstadt

Tel.: +49 74 31 17-0
Fax: +49 74 31 17-21 279

Internet: www.guehring.de
E-Mail: info@guehring.de

GUHRING



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

Ratio drills without oil feed

DIN 6537 K	RT 100 U		3xD	Solid carbide	S	3,000 - 20,000	1184	121	168
DIN 6537 K	RT 100 U		3xD	Solid carbide	F	3,000 - 20,000	2480	121	168
DIN 6537 K	RT 100 U		3xD	Solid carbide	F	3,000 - 20,000	2472	121	168
DIN 6537 K	RT 100 F		3xD	Solid carbide	F	3,700 - 13,000	2475	121	168
DIN 6537 K	RT 100 HF		3xD	Solid carbide	Y	3,000 - 20,000	8524	121	168
DIN 6537 L	RT 100 U		5xD	Solid carbide	S	3,300 - 16,000	2717	121	174
DIN 6537 L	RT 100 U		5xD	Solid carbide	F	3,000 - 20,000	2996	121	174
DIN 6537 L	RT 100 U		5xD	Solid carbide	F	3,000 - 20,000	2719	121	174
DIN 6537 L	RT 100 F		5xD	Solid carbide	F	3,000 - 15,000	2712	121	174
DIN 6539	RT 100 U		3xD	Solid carbide	S	3,000 - 16,000	1242	121	179
DIN 6539	RT 100 U		3xD	Solid carbide	F	3,000 - 16,000	2473	121	179
DIN 6539	RT 100 F		3xD	Solid carbide	S	3,000 - 14,000	1702	121	179
Gühring std.	RT 100 U		5xD	Solid carbide	S	5,000 - 16,000	1243	121	183
Gühring std.	RT 100 U		5xD	Solid carbide	F	5,000 - 15,000	2474	121	183

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● TiAIN
● TiAIN nanoA
● TiAIN SuperA



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
DIN 6537 K	RT 100 U		3xD	Solid carbide	S	3,000 - 20,000	1181	121	186
DIN 6537 K	RT 100 U		3xD	Solid carbide	F	3,000 - 20,000	2477	121	186
DIN 6537 K	RT 100 U		3xD	Solid carbide	F	3,000 - 20,000	2469	121	186
DIN 6537 K	RT 100 F		3xD	Solid carbide	S	3,100 - 22,000	1660	121	187
DIN 6537 K	RT 100 F		3xD	Solid carbide	S	4,000 - 25,000	1180	121	187
DIN 6537 K	RT 100 F		3xD	Solid carbide	F	3,400 - 20,000	2468	121	187
DIN 6537 K	RT 100 VA		3xD	Solid carbide	a	3,000 - 20,000	8510	121	187
DIN 6537 K	RT 100 VA		3xD	Solid carbide	a	3,000 - 20,000	8610	121	187
DIN 6537 K	RT 100 HF		3xD	Solid carbide	Y	3,000 - 20,000	8520	121	187
DIN 6537 K	RT 100 HF		3xD	Solid carbide	Y	3,000 - 20,000	8620	121	187
Gühring std.	RT 150 GG		4xD	Solid carbide	○	3,000 - 20,000	768	121	200
Gühring std.	RT 150 GG		4xD	Solid carbide	○	3,000 - 20,000	6068	121	200
DIN 6537 L	RT 100 U		5xD	Solid carbide	S	3,000 - 19,500	1663	121	204
DIN 6537 L	RT 100 U		5xD	Solid carbide	S	3,700 - 20,000	1183	121	204
DIN 6537 L	RT 100 U		5xD	Solid carbide	F	3,000 - 20,000	2479	121	204

Ratio drills



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

Ratio drills with oil feed

DIN 6537 L	RT 100 U		5xD	Solid carbide	F	3,000 - 20,000	2471	121	204
DIN 6537 L	RT 100 F		5xD	Solid carbide	S	3,000 - 23,500	1662	121	205
DIN 6537 L	RT 100 F		5xD	Solid carbide	S	3,000 - 25,000	1182	121	205
DIN 6537 L	RT 100 F		5xD	Solid carbide	F	3,000 - 20,000	2478	121	205
DIN 6537 L	RT 100 F		5xD	Solid carbide	F	3,000 - 20,000	2470	121	205
DIN 6537 L	RT 100 R		5xD	Solid carbide	F	3,000 - 20,000	6501	165	205
DIN 6537 L	RT 100 VA		5xD	Solid carbide	a	3,000 - 20,000	8511	121	205
DIN 6537 L	RT 100 VA		5xD	Solid carbide	a	3,000 - 20,000	8611	121	205
DIN 6537 L	RT 100 HF		5xD	Solid carbide	Y	3,000 - 20,000	8521	121	205
DIN 6537 L	RT 100 HF		5xD	Solid carbide	Y	3,000 - 20,000	8621	121	205
Gühring std.	RT 100 U		7xD	Solid carbide	S	3,000 - 19,500	2711	121	218
Gühring std.	RT 100 U		7xD	Solid carbide	F	3,000 - 20,000	4044	121	218
Gühring std.	RT 100 U		7xD	Solid carbide	F	3,000 - 20,000	4045	121	218
Gühring std.	RT 100 R		7xD	Solid carbide	F	4,000 - 20,000	6502	165	218
Gühring std.	RT 100 HF		7xD	Solid carbide	Y	3,000 - 16,000	8522	121	218

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● TiAIN
● TiAIN nanoA
● TiAIN SuperA



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

Ratio drills

Ratio drills with oil feed

Gühring std.	RT 150 GG		7xD	Solid carbide	○	3,000 - 20,000	769	121	223
Gühring std.	RT 150 GG		7xD	Solid carbide	○	3,000 - 19,500	6069	121	223
Gühring std.	RT 150 GG		10xD	Solid carbide	○	3,000 - 20,000	770	121	225
Gühring std.	RT 150 GG		10xD	Solid carbide	○	3,000 - 19,500	6070	121	225
Gühring std.	RT 150 GN		15xD	Solid carbide	○	5,000 - 14,000	773	121	227
Gühring std.	RT 100 T	NEW	15xD	Solid carbide	ⓐ	3,000 - 14,000	6509	165	228
Gühring std.	RT 100 T		20xD	Solid carbide	ⓐ	3,000 - 14,000	6511	165	230
Gühring std.	RT 100 T		25xD	Solid carbide	ⓐ	3,000 - 12,000	6512	165	232
Gühring std.	RT 100 T		30xD	Solid carbide	ⓐ	3,000 - 10,000	6513	165	234
Gühring std.	RT 100 T	NEW	40xD	Solid carbide	ⓐ	3,000 - 8,000	6514	165	235
DIN 6538 K	RT 80 U		3xD	Carbide	Ⓢ	9,500 - 25,500	1171	128	236
DIN 6538 M	RT 80 U		5xD	Carbide	Ⓢ	9,800 - 25,500	1172	128	239
DIN 6538 L	RT 80 U		7xD	Carbide	Ⓢ	9,600 - 25,000	1173	128	241



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

3-flute Ratio drills

DIN 6537 L	FT 200 G		5xD	Solid carbide	○	3,000 - 20,000	2713	109	243
DIN 6539	GS 200 U		5xD	Solid carbide	○	3,000 - 20,000	731	109	245
DIN 6539	GS 200 U		5xD	Solid carbide	Ⓢ	3,000 - 14,400	611	109	245
DIN 6539	GS 200 G		5xD	Solid carbide	○	3,570 - 12,500	745	109	245
DIN 6539	GS 200 G		5xD	Solid carbide	○	3,000 - 20,000	1025	109	245
DIN 6539	GS 200 F		5xD	Solid carbide	Ⓢ	3,000 - 11,000	1027	109	245

3-flute stepped Ratio drills

Guhring std.	GS 200 G			Solid carbide	○	3,400 - 20,000	1032	109	249
--------------	----------	--	--	---------------	---	----------------	------	-----	-----



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

T 800 inserts drilling system

Tool holders for interchangeable inserts HT 800

Gühring std.	HT 800 WP		NEW	1,5xD		11,000 - 40,000	4106	140	250
Gühring std.	HT 800 WP		NEW	3xD		11,000 - 40,000	4107	140	253
Gühring std.	HT 800 WP		NEW	5xD		11,000 - 40,000	4108	140	256
Gühring std.	HT 800 WP		NEW	7xD		11,000 - 31,500	4109	140	259
Gühring std.	HT 800 WP		NEW	10xD		11,000 - 31,500	4110	140	262
Gühring std.	HT 800 WP		NEW	1xD		11,000 - 40,000	4105	140	265

Interchangeable inserts HT 800

Gühring std.		NEW	Solid carbide	F	11,000 - 40,000	4112	141	266
Gühring std.		NEW		F	11,000 - 40,000	4113	141	267
Gühring std.		NEW		○	11,000 - 40,000	4114	141	267
Gühring std.		NEW		a	11,000 - 40,000	4115	141	267
Gühring std.		NEW		a	11,000 - 40,000	4111	141	274

Countersinking insert HT 800

Gühring std.			Solid carbide	○	-	7635	142	278
Gühring std.				S	-	7645	142	279



T 800 inserts drilling system

T 800 inserts drilling system

Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

Countersinking insert HT 800

Guhring std.



Solid carbide



17.000 - 46.000

7632

142

280

Clamping screws HT 800

Guhring std.

6128

122

281

Guhring std.



4071

140

282

Torque wrenches

Guhring std.



4915

114

283

Torx socket sets

Guhring std.



4917

140

284

Torx screwdriver

Guhring std.



1612

140

285





Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

T 800 inserts drilling system

Tool holders for interchangeable inserts RT 800

Guhring std.	RT 800 WP		3xD			17,000 - 40,500	5242	140	286
Guhring std.	RT 800 WP		5xD			17,000 - 40,500	5243	140	287
Guhring std.	RT 800 WP		7xD			17,000 - 40,500	5248	140	288

Interchangeable inserts RT 800

Guhring std.		Solid carbide	○	16,000 - 40,000	2747	141	289
Guhring std.			● F	16,000 - 40,500	2485	141	291
Guhring std.			● S	16,000 - 40,500	1047	141	293

Clamping screws RT 800

Guhring std.							1071	140	295
--------------	---	--	--	--	--	--	-------------	-----	-----

Torque wrenches

Guhring std.							4915	114	296
--------------	---	--	--	--	--	--	-------------	-----	-----

Torx socket sets

Guhring std.							4917	140	297
--------------	---	--	--	--	--	--	-------------	-----	-----

Torx screwdriver

Guhring std.							1612	140	298
--------------	---	--	--	--	--	--	-------------	-----	-----



T800
Tooling system

Standard	Type	Tool illustration	Drilling depth	Tool material	Surface finish	Diameter range	Gühring no.	Discount group	Standard range
----------	------	-------------------	----------------	---------------	----------------	----------------	-------------	----------------	----------------

LT 800 tooling system

Gühring
std. LT800
WP



ISO taper holder

SK 40 - SK 60/
HSK-C 63 -
HSK-C 100

4512

114

299

Gühring
std. LT800
WP



VDI Holder

VDI 40 - VDI 60/
HSK-C 63 -
HSK-C 100

4510

114

299

Gühring
std. LT800
WP



Reductions HSK-A/HSK-C

HSK-A 80 -
HSK-A 100/
HSK-C 63 -
HSK-C 80

4355

114

300

Gühring
std. LT800
WP



Extensions HSK-A

HSK-A 63 -
HSK-A 100/
HSK-C 63 -
HSK-C 100

4549

114

300

Gühring
std. LT800
WP



15° flutes basic holder

0.5xD/
2.0xD

Holder size
400 - 560

4142

114

301

○ bright
◐ steam tempered
◑ nitrided lands
● nitrided
● golden brown
Ⓐ TiAlN
ⓐ TiAlN nanoA
Ⓐ AITIN SuperA





Standard	Type	Tool illustration	Drilling depth	Tool material	Surface finish	Diameter range	Guhring no.	Discount group	Standard range
----------	------	-------------------	----------------	---------------	----------------	----------------	-------------	----------------	----------------

T800
Tooling system

LT 800 tooling system

Guhring std.	LT800 WP		0.5xD/ 2.0xD			Holder size 600 - 950	4144	114	301
Un-fluted basic holder									
Guhring std.	LT800 WP		3xD			Holder size 400 - 560	4148	114	302
15° flutes extension									
Guhring std.	LT800 WP		3xD			Holder size 600 - 950	4149	114	302
Un-fluted extension									
Guhring std.	LT800 WP		1xD			Holder size 400 - 950	4150	114	303
Drill heads									

Accessories for LT 800 WP drill heads







Guhring std.	LT800 WP					Holder size 400 - 950	4164	114	304
Retention spindles									
Guhring std.	LT800 WP					T30 - T45	4188	114	304
Torx-Bits									

C TiCN	Cb Carbo	D Cristall	F FIRE/nanoFIRE	P AlCrN	S TiN	S+ TiN+	M MolyGlide	Y Signum
---------------	-----------------	-------------------	------------------------	----------------	--------------	----------------	--------------------	-----------------










Standard	Type	Tool illustration	Drilling depth	Tool material	Surface finish	Diameter range	Guhring no.	Discount group	Standard range
----------	------	-------------------	----------------	---------------	----------------	----------------	-------------	----------------	----------------

Accessories for LT 800 WP drill heads

Guhring std.						1/2"	4915	114	304
		Torx key							
Guhring std.	LT800 WP					Holder size 400 - 950	4160	114	305
		Cartridges							
Guhring std.	LT800 WP					Holder size 400 - 650	4189	114	305
		Clamping screws							
DIN EN ISO 4762						Holder size 700 - 950	4907	114	305
		Clamping screws							
DIN 6798	LT800 WP					Holder size 400 - 950	4104	114	306
		Serrated lock washers (Nord-Lock®)							
Guhring std.	LT800 WP					Holder size 400 - 950	4168	114	306
		Distance pieces							

LT 800 WP internal interchangeable inserts and accessories

Guhring std.	RT800 WP			Carbide	○	27.00 - 34.00	2747	141	307
Guhring std.	RT800 WP			Carbide	Ⓢ	27.00 - 34.00	1047	141	307
Guhring std.	RT800 WP			Carbide	ⓕ	27.00 - 34.00	2485	141	307
Guhring std.	RT800 WP					T8	1071	140	307
		Clamping screw							
Guhring std.						T8	1612	140	307
		Torx screwdriver							
Guhring std.	RT800 WP					1/4"	4917	140	307
		Torx-Bit							
Guhring std.						1/4"	4915	114	307
		Torque key							



Standard	Type	Tool illustration	Drilling depth	Tool material	Surface finish	Diameter range	Guhring no.	Discount group	Standard range
----------	------	-------------------	----------------	---------------	----------------	----------------	-------------	----------------	----------------

T800
Tooling system












LT 800 WP external interchangeable inserts and accessories

Guhring std.	LTT			Carbide	○	insert 05 - 06	4170	142	308
Guhring std.	LTT			Carbide	○	insert 05 - 06	4171	142	308
Guhring std.	LTT			Carbide	Ⓢ	insert 05 - 06	4172	142	308
Guhring std.	LTT			Carbide	ⓐ	insert 05 - 06	4173	142	308
Guhring std.	CCHX			Carbide	○	insert 09 - 12	4179	142	308
Guhring std.	CCHX			Carbide	Ⓢ	insert 09 - 12	4180	142	308
Guhring std.	CCHX			Carbide	Ⓢ	insert 09 - 12	4181	142	308
Guhring std.	CCHX			Carbide	Ⓢ	insert 09 - 12	4182	142	308
Guhring std.		 Clamping screw with 75° countersink head				for insert 05 - 09	4166	114	308
Guhring std.		 Clamping screw with 60° countersink head				for insert 05 - 12	6128	122	308

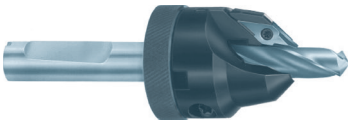

FR 90 chamfer collar

Tooling systems

Standard	Type	Tool illustration	Drilling depth	Tool material	Surface finish	Diameter range	Gühring no.	Discount group	Standard range
Gühring std.	FR 90					5.0 - 16.0	1052	140	311
		Chamfer collar complete							
Gühring std.	FR 90					5.0 - 18.0	145	140	311
		Chamfer collar							
Gühring std.	FR90					5.0 - 16.0	1053	140	311
		Clamping sleeve							
Gühring std.	FR90					5.0 - 18.0	1054	140	311
		Adjustment ring							
Gühring std.	FR90			Carbide	○	4.0 - 20.0	1156	142	310
Gühring std.	FR90				●	4.0 - 20.0	1056	142	310
Gühring std.	FR90					M4	4072	140	310
		Adjustment element							
Gühring std.	FR90					4.0 - 20.0	1055	140	310
		Clamping piece							
Gühring std.	FR90					T8	1612	114	311
		Screwdriver							
Gühring std.	FR90					T8/SW4 - SW5	1072	140	311
		Torx screw							
Gühring std.	FR90					SW4 - SW5	4912	114	311
		Screwdriver							

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank twist drills

Jobber drills

DIN 338	N		right-hand	HSS		0,200 - 20,000	205	130	312
DIN 338	H		right-hand	HSS		0,200 - 20,000	206	134	312
DIN 338	W		right-hand	HSS		0,200 - 20,000	207	134	312
DIN 338	N		left-hand	HSS		0,200 - 20,000	208	134	312
DIN 338	H		left-hand	HSS		0,300 - 20,000	209	134	312
DIN 338	W		left-hand	HSS		0,250 - 20,000	210	138	312
DIN 338	N		right-hand	HSS		3,000 - 16,000	240	132	313
DIN 338	GT 100		right-hand	HSS		0,600 - 16,000	549	136	313
DIN 338	GT 100		left-hand	HSS		1,000 - 16,000	550	138	313
DIN 338	N		right-hand	HSS		2,370 - 5,610	560	138	313
DIN 338	N		right-hand	HSS		0,200 - 19,000	651	131	313
DIN 338	GT 100		right-hand	HSS		1,000 - 15,000	652	137	313
DIN 338	N		left-hand	HSS		0,250 - 14,250	664	139	313
DIN 338	GT 100		left-hand	HSS		1,300 - 10,200	665	139	313
DIN 338	N		right-hand	HSS		1,000 - 15,500	2456	135	313

TiCN	Carbo	Cristall	FIRE/nanoFIRE	AlCrN	TiN	TiN+	MolyGlide	Signum
------	-------	----------	---------------	-------	-----	------	-----------	--------



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Jobber drills

DIN 338	GT 100		right-hand	HSS		1,000 - 15,000	2457	137	313
DIN 338	N		right-hand	HSCO		0,200 - 20,000	305	134	350
DIN 338	N		left-hand	HSCO		0,360 - 18,500	308	138	350
DIN 338	Ti		right-hand	HSCO		0,200 - 19,000	605	134	350
DIN 338	Ti		left-hand	HSCO		1,300 - 9,500	608	138	350
DIN 338	GT 100		right-hand	HSCO		1,000 - 16,000	622	136	350
DIN 338	Ti		right-hand	HSCO		0,500 - 14,500	657	135	350
DIN 338	GT 100		right-hand	HSCO		1,000 - 15,000	658	137	351
DIN 338	GT 100		right-hand	HSCO		3,000 - 12,000	1221	137	351
DIN 338	GT 100		right-hand	HSCO		3,000 - 12,000	1223	137	351
DIN 338	VA		right-hand	HSCO		1,000 - 13,000	1260	134	351
DIN 338	P2000		right-hand	HSCO		1,000 - 13,000	2047	134	351
DIN 338	Ti		right-hand	HSCO		0,400 - 15,000	2458	135	351
DIN 338	GT 100		right-hand	HSCO		1,000 - 14,000	2459	137	351
DIN 338	N		right-hand	HSCO		1,100 - 14,000	2997	135	351

bright	steam tempered	nitrided lands	nitrided	golden brown	TiAIN	TiAIN nanoA	TiAIN SuperA
--------	----------------	----------------	----------	--------------	-------	-------------	--------------



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Jobber drills

DIN 338	N		right-hand	M42	○	0,400 - 16,000	1146	138	351
Guhring std.	Duro 150		right-hand	Carbide	○	2,700 - 14,000	710	102	376
Guhring std.	N		right-hand	Solid carbide	○	1,000 - 12,700	732	102	376
Guhring std.	N		right-hand	Solid carbide	F	1,000 - 12,700	2464	102	376

Stub drills

DIN 1897	N		right-hand	HSS	○ ^{>0} _{2,36}	0,350 - 48,000	223	132	382
DIN 1897	H		right-hand	HSS	○	0,690 - 21,000	224	138	382
DIN 1897	W		right-hand	HSS	○	1,000 - 20,000	225	138	382
DIN 1897	N		left-hand	HSS	○ ^{>0} _{6,00}	0,320 - 50,000	226	134	382
DIN 1897	H		left-hand	HSS	○	0,750 - 24,000	227	138	382
DIN 1897	W		left-hand	HSS	○	1,000 - 21,000	228	138	382
DIN 1897	GT 80		right-hand	HSS	○ ^{<0} _{2,36} ○ ^{>0} ₁₆₀	1,000 - 20,000	552	136	382
DIN 1897	GT 80		left-hand	HSS	○ ^{<0} _{2,36} ○ ^{>0} ₁₆₀	1,000 - 19,840	553	138	382
DIN 1897	N		right-hand	HSS	S	0,500 - 30,160	653	133	383
DIN 1897	N		left-hand	HSS	S	0,900 - 13,500	672	139	383



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Stub drills

DIN 1897	N		right-hand	HSS		1,000 - 15,000	2460	133	383
DIN 1897	GV 120		right-hand	HSCO		0,400 - 48,000	329	134	383
DIN 1897	GV 120		left-hand	HSCO		0,450 - 35,000	330	138	383
DIN 1897	GV 120		right-hand	HSCO		0,500 - 15,500	659	135	383
DIN 1897	GT 80		right-hand	HSCO		1,000 - 20,000	1228	137	383
DIN 1897	VA		right-hand	HSCO		1,000 - 12,000	1261	138	383
DIN 1897	P2000		right-hand	HSCO		1,000 - 13,000	2048	135	383
DIN 1897	GV 120		right-hand	HSCO		1,000 - 13,000	2461	135	383
DIN 1897	GT 80		right-hand	HSCO		1,000 - 16,000	2498	137	383
DIN 1897	N		right-hand	M42		1,000 - 15,870	1259	138	414
DIN 1897	GT 500		right-hand	HSS-E-PM		1,000 - 14,290	515	115	414
DIN 6539	N		right-hand	Solid carbide		0,500 - 16,000	730	102	414
DIN 6539	N		right-hand	Solid carbide		1,000 - 16,000	2463	102	414
Guhring std.	N		right-hand	Solid carbide		0,500 - 6,500	702	102	420















	bright		steam tempered		nitrided lands		nitrided		golden brown		TiAIN		TiAIN nanoA		TiAIN SuperA
--	--------	--	----------------	--	----------------	--	----------	--	--------------	--	-------	--	-------------	--	--------------



Standard	Type	Tool illustration	Tool material	Surface finish	Ø-range mm	Gühring no.	Discount group	Standard range, page
----------	------	-------------------	---------------	----------------	------------	-------------	----------------	----------------------

Streight shank twist drills

Jobber drill sets

DIN 338	N	 consisting of Gühring no. 205	HSS			201/200	130	422
DIN 338	N	 consisting of Gühring no. 651	HSS			201/200	130	422
DIN 338	N	 consisting of Gühring no. 305	HSCO			201/200	130	424
DIN 338	Ti	 consisting of Gühring no. 605	HSCO			201/200	134	424
DIN 338	VA	 consisting of Gühring no. 1260	HSCO			195	130	424
DIN 338	P2000	 consisting of Gühring no. 2047	HSCO			2049	134	425
DIN 1897	P2000	 consisting of Gühring no. 2048	HSCO			2050	134	425
Gühring std.	Case only					36	138	422
Gühring std.	Case only					73	138	423
Gühring std.	Plastic stand only					11	138	422

 TiCN	 Carbo	 Cristall	 FIRE/nanoFIRE	 AlCrN	 TiN	 TiN+	 MolyGlide	 Signum
--	---	--	---	---	---	--	---	--



Straight shank twist drills

Straight shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Twist drills with oversize straight shank

Gühring std.	GU 500		right-hand	HSCO		2,000 - 20,000	512	115	426
Gühring std.	GT 500		right-hand	HSS-E-PM		2,000 - 13,000	513	115	430
Gühring std.	GU 500		right-hand	HSCO		2,000 - 20,000	511	115	432
DIN 6537 K	H		right-hand	Solid carbide		2,600 - 14,100	1946	102	436

Jobber drills with 12.7 mm dia. shank

Gühring std.	N		right-hand	HSS		13,000 - 28,570	268	138	437
--------------	---	--	------------	-----	--	-----------------	-----	-----	-----

Stub drills with 16.0 mm dia. shank

Gühring std.	N		right-hand	HSCO		16,000 - 40,000	128	138	438
--------------	---	--	------------	------	--	-----------------	-----	-----	-----

Stub drills with 25.4 mm dia. shank

Gühring std.	N		right-hand	HSCO		25,000 - 40,000	129	138	439
Gühring std.	N		left-hand	HSCO		25,000 - 39,000	136	138	439

90° NC-spotting drills

Gühring std.	N		right-hand	HSS		2,950 - 25,400	557	134	440
Gühring std.	N		right-hand	HSS		3,000 - 25,400	568	135	440
Gühring std.	N		right-hand	Solid carbide		4,000 - 20,000	723	102	440

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank twist drills

90° NC-spotting drills

Gühring std.	N		right-hand	HSS	○	6,350 - 25,400	559	138	441
--------------	---	--	------------	-----	---	----------------	-----	-----	-----

120° NC-spotting drills

Gühring std.	N		right-hand	HSS	○	3,000 - 25,400	556	134	442
Gühring std.	N		right-hand	HSS	Ⓢ	3,000 - 25,000	567	139	442
Gühring std.	N		right-hand	Solid carbide	○	5,000 - 20,000	724	102	442

142° NC-spotting drills

Gühring std.	N		right-hand	Solid carbide	○	4,000 - 20,000	546	102	443
--------------	---	--	------------	---------------	---	----------------	-----	-----	-----

Straight shank drills double-ended

Gühring std.	DK 77		right-hand	HSS	○ _{>0/2,36}	1,500 - 10,000	554	134	444
--------------	-------	--	------------	-----	-------------------------	----------------	-----	-----	-----

Micro-precision drills without oil feed

DIN 1899	N		right-hand	HSS-E-PM	○	0,050 - 1,930	301	134	446
DIN 1899	N		left-hand	HSS-E-PM	○	0,130 - 1,850	303	138	446
DIN 1899	N		right-hand	HSS-E-PM	Ⓢ	0,160 - 1,900	660	135	446
Gühring std.	N		right-hand	Solid carbide	○	0,200 - 1,400	701	102	446
Gühring std.	N		right-hand	Solid carbide	ⓐ	0,100 - 3,000	3899	102	453

NEW



Straight shank twist drills

Standard	Type	Tool illustration	Drilling depth	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	----------------	---------------	---------	----	-------------	----------------	---------------------

Micro-precision drills without oil feed

Gühring std.	N		4xD	Solid carbide	A	0,500 - 3,000	6400	164	455
Gühring std.	N		7xD						

Micro-precision drills with oil feed

Gühring std.	N	NEW	8xD	Solid carbide	A	1,400 - 3,000	6408	164	459
Gühring std.	N	NEW	15xD						



Standard	Type	Tool illustration	Cooling	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	---------	---------------	---------	----	-------------	----------------	---------------------

Straight shank twist drills

Oil feed drills

Gühring std.	GT 80 IK		axial	HSCO	○	5,000 - 20,000	1131	134	462
Gühring std.	GT 80 IK		axial	HSCO	Ⓢ	5,000 - 20,000	1132	135	462
Gühring std.	N		axial	HSS	○	3,000 - 13,000	390	136	464



Straight shank twist drills

Straight shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Bushing length twist drills

DIN 339	N		right-hand	HSS		0,800 - 20,000	211	134	465
DIN 339	N		right-hand	HSS		2,400 - 5,000	561	138	465
DIN 339	N		right-hand	HSS		1,000 - 13,000	666	139	465
DIN 339	N		right-hand	HSCo		1,100 - 19,000	311	138	465

Long series twist drills

DIN 340	N		right-hand	HSS		2,950 - 25,250	204	138	472
DIN 340	N		right-hand	HSS		0,400 - 36,510	217	132	472
DIN 340	H		right-hand	HSS		0,500 - 16,000	218	134	472
DIN 340	W		right-hand	HSS		0,400 - 20,640	219	134	472
DIN 340	N		left-hand	HSS		0,450 - 29,000	220	138	472
DIN 340	H		left-hand	HSS		0,450 - 15,000	221	138	472
DIN 340	GT50		right-hand	HSS		1,000 - 32,600	501	136	472
DIN 340	GT 100		left-hand	HSS		1,400 - 13,000	506	138	473
DIN 340	GT 100		right-hand	HSS		1,000 - 14,000	535	136	473
DIN 340	N		right-hand	HSS		0,500 - 22,220	667	133	473

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank twist drills

Long series twist drills

DIN 340	GT 100		right-hand	HSS		1,000 - 14,000	668	137	473
DIN 340	GT 100		right-hand	HSS		1,000 - 10,000	2462	137	473
DIN 340	N		right-hand	HSCO		0,500 - 22,000	317	134	473
DIN 340	GT 100		right-hand	HSCO		1,000 - 16,000	336	136	473
DIN 340	GT 100		right-hand	HSCO		1,000 - 12,000	396	137	473
DIN 340	Ti		right-hand	HSCO		1,000 - 13,000	617	134	473
DIN 340	Ti		right-hand	HSCO		1,000 - 10,200	669	139	473
Guhring std.	N		right-hand	Solid carbide		0,500 - 1,500	706	102	496

Extra length twist drills, series 1

DIN 1869	N		right-hand	HSS		1,600 - 13,000	235	134	497
DIN 1869	GT 100		right-hand	HSS		1,950 - 13,000	502	136	497
DIN 1869	GT50		right-hand	HSS		2,000 - 12,700	524	138	497
DIN 1869	GT 100		right-hand	HSS		1,980 - 12,700	670	137	497
DIN 1869	GT 100		right-hand	HSCO		2,700 - 10,000	618	136	497



Straight shank twist drills

Straight shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Extra length twist drills, series 2

DIN 1869	N		right-hand	HSS		2,700 - 13,000	236	134	502
DIN 1869	GT 100		right-hand	HSS		2,000 - 13,000	503	136	502
DIN 1869	GT50		right-hand	HSS		3,000 - 13,000	528	138	502
DIN 1869	GT 100		right-hand	HSS		2,700 - 8,500	671	139	502
DIN 1869	GT 100		right-hand	HSCO		3,000 - 10,000	619	138	502

Extra length twist drills, series 3

DIN 1869	N		right-hand	HSS		3,500 - 13,000	237	138	505
DIN 1869	GT 100		right-hand	HSS		2,500 - 13,000	504	136	505
DIN 1869	GT50		right-hand	HSS		2,500 - 11,500	529	138	505
DIN 1869	GT 100		right-hand	HSCO		2,500 - 13,000	571	136	505

Extra length twist drills

Guhring std.	GT 100		right-hand	HSS		6,000 - 12,000	242	136	508
Guhring std.	GT 100		right-hand	HSS		8,000 - 12,000	243	138	509
Guhring std.	GT 100		right-hand	HSS		10,000 - 12,000	244	138	510

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank twist drills

Aircraft extension drills, 6 inches long

NAS 907	N		right-hand	HSS		1,500 - 8,000	577	138	511
NAS 907	N		right-hand	HSS		1,500 - 8,000	579	138	511

Aircraft extension drills, 12 inches long

NAS 907	N		right-hand	HSS		1,500 - 8,000	578	138	514
NAS 907	N		right-hand	HSS		1,500 - 8,000	580	138	514

Taper pin drills

DIN 1898	N		right-hand	HSS		1,000 - 12,000	531	138	516
----------	---	--	------------	-----	--	----------------	-----	-----	-----

Carbide-tipped twist drill

DIN 8037	N		right-hand	Carbide		1,700 - 24,000	703	102	517
DIN 8038	N		right-hand	Carbide		1,900 - 24,000	704	102	517

Kevlar drills

Gühring std.	N		right-hand	Solid carbide		2,500 - 12,000	1149	102	520
--------------	---	--	------------	---------------	--	----------------	------	-----	-----

Carbide tipped spade drills



Gühring std.			right-hand	Carbide		3,000 - 12,000	707	102	521
--------------	--	--	------------	---------	--	----------------	-----	-----	-----



Straight shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Masonry drills

Guhring std.	N		right-hand	Carbide		4,000 - 12,000	716	102	522
--------------	---	---	------------	----------------	--	----------------	------------	-----	-----



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Taper shank twist drills

Jobber drills

Guhring std.	GV 120		right-hand	HSCO		8,100 - 43,000	363	134	523
Guhring std.	GV 120		right-hand	HSCO		10,500 - 33,000	663	139	523

Twist drills

DIN 345	N		right-hand	HSS		8,500 - 59,000	229	138	525
DIN 345	N		right-hand	HSS		2,380 - 98,420	245	132	525
DIN 345	H		right-hand	HSS		6,700 - 47,000	246	138	525
DIN 345	W		right-hand	HSS		3,200 - 32,000	247	138	525
DIN 345	N		left-hand	HSS		6,000 - 60,000	248	138	525
DIN 345	GT 100		right-hand	HSS		7,940 - 31,750	558	138	525
DIN 345	N		right-hand	HSS		10,000 - 28,000	592	138	525
DIN 345	GT 100		right-hand	HSS		7,940 - 31,500	606	139	537
DIN 345	N		right-hand	HSS		3,000 - 31,000	654	133	537
DIN 345	N		right-hand	HSCO		3,000 - 50,000	345	134	537
DIN 345	GT 100		right-hand	HSCO		10,000 - 39,000	645	138	537
DIN 345	N		right-hand	HSCO		8,000 - 30,000	661	139	537

TiCN	Carbo	Cristall	FIRE/nanoFIRE	AlCrN	TiN	TiN+	MolyGlide	Signum
------	-------	----------	---------------	-------	-----	------	-----------	--------



Taper shank twist drills

Taper shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Twist drills

DIN 345	GT 100		right-hand	HSCO		10,000 - 28,500	662	139	537
DIN 345	GT 100		right-hand	HSCO		10,000 - 30,160	1222	139	537
DIN 345	GT 100		right-hand	HSCO		10,400 - 30,160	1224	139	543
DIN 345	VA		right-hand	HSCO		10,000 - 34,000	1262	134	543
DIN 346	N		right-hand	HSS		10,000 - 76,000	251	138	545
DIN 346	N		right-hand	HSCO		12,000 - 31,500	351	138	545

Bushing length twist drills

DIN 341	N		right-hand	HSS		2,900 - 50,000	257	132	547
DIN 341	GT50		right-hand	HSS		5,500 - 29,500	505	138	547
DIN 341	GT 100		right-hand	HSS		5,500 - 32,000	551	136	547
DIN 341	N		right-hand	HSS		4,200 - 22,000	655	133	547
DIN 341	GT 100		right-hand	HSS		6,800 - 23,000	656	139	547
DIN 341	N		right-hand	HSCO		4,750 - 44,000	357	138	547
DIN 341	GT 100		right-hand	HSCO		10,000 - 26,000	623	138	547
Guhring std.	N		right-hand	HSS		10,000 - 29,000	523	138	554

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Standard	Type	Tool illustration	Cooling	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	---------	---------------	---------	----	-------------	----------------	---------------------

Taper shank twist drills

Oil feed drills short

Guhring std.	N		radial	HSS		9,520 - 23,020	269	138	555
--------------	---	--	--------	------------	--	----------------	------------	-----	-----

Oil feed drills, flute length to DIN 341

Guhring std.	N		DIN 228 BK	HSS		10,000 - 32,000	1101	138	557
Guhring std.	N		axial	HSS		10,000 - 40,000	270	138	558
Guhring std.	N		radial	HSS		10,000 - 44,450	271	138	558
Guhring std.	N		radial	HSS		10,000 - 44,450	272	138	558
Guhring std.	GT 100		axial	HSCO		11,000 - 34,920	370	138	558
Guhring std.	GT 100		radial	HSCO		11,000 - 34,920	371	138	558
Guhring std.	GT 100		radial	HSCO		12,500 - 34,000	372	138	558

Oil feed drills, flute length to DIN 1870

Guhring std.	GT 100		axial	HSCO		11,000 - 34,000	374	138	561
Guhring std.	GT 100		radial	HSCO		11,000 - 34,000	375	138	561
Guhring std.	GT 100		radial	HSCO		11,000 - 29,000	376	138	561



Taper shank twist drills

Taper shank twist drills

Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Extra length twist drills, series 1

DIN 1870	N		right-hand	HSS		8,000 - 50,000	266	134	563
DIN 1870	GT50		right-hand	HSS		8,200 - 33,000	525	138	563
DIN 1870	GT 100		right-hand	HSS		8,000 - 30,000	526	136	563
DIN 1870	GT 100		right-hand	HSCO		9,520 - 30,000	620	138	563

Extra length twist drills, series 2

DIN 1870	N		right-hand	HSS		8,000 - 45,000	267	138	566
DIN 1870	GT 100		right-hand	HSS		8,000 - 30,000	527	136	566
DIN 1870	GT50		right-hand	HSS		8,500 - 31,000	542	138	566
DIN 1870	GT 100		right-hand	HSCO		9,520 - 23,420	621	138	566

Extra length twist drills

Guhring std.	GT 100		right-hand	HSS		6,000 - 7,500	563	138	569
Guhring std.	GT 100		right-hand	HSS		8,000 - 40,000	566	138	569
Guhring std.	GT 100		right-hand	HSS		14,000 - 40,000	293	138	570
Guhring std.	GT 100		right-hand	HSS		6,000 - 10,000	564	138	570
Guhring std.	GT 100		right-hand	HSS		6,000 - 17,000	565	138	571



bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA




Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Taper shank twist drills


Extra length twist drills

Guhring std.	GT 100		right-hand	HSS	○	14,000 - 18,000	298	138	572
Guhring std.	GT 100		right-hand	HSS	○	14,000 - 18,000	299	138	573

Taper pin drills

DIN 1898	N		right-hand	HSS	●	5,000 - 25,000	532	138	574
----------	---	---	------------	------------	---	----------------	------------	-----	-----

Carbide-tipped twist drill

DIN 8041	N		right-hand	Carbide	○	8,500 - 40,000	705	102	575
----------	---	---	------------	----------------	---	----------------	------------	-----	-----



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Stepped drills for centering to DIN 332

Gühring std.	N		right-hand	HSS		8,000 - 40,000	274	138	576
Gühring std.	N		right-hand	HSS		8,000 - 40,000	574	138	576
Gühring std.	N		right-hand	HSS		8,000 - 20,000	575	138	577
Gühring std.	N		right-hand	HSS		14,000 - 40,000	576	138	578

Straight shank short step drills

Gühring std.	N		right-hand	HSS		6,000 - 19,000	378	138	579
Gühring std.	N		right-hand	HSS		6,600 - 21,500	1147	138	579
Gühring std.	N		right-hand	HSS		6,000 - 18,000	379	138	580
Gühring std.	N		right-hand	HSS		3,400 - 13,500	380	138	581

Straight shank subland drills

DIN 8374	N		right-hand	HSS		6,000 - 15,000	536	138	582
DIN 8374	N		right-hand	HSS		7,500 - 19,000	569	138	582
Gühring std.	N		right-hand	HSS		6,600 - 17,200	636	138	582
Gühring std.	N		right-hand	HSS		6,000 - 8,000	638	138	582
DIN 8376	N		right-hand	HSS		6,000 - 18,000	538	138	583

	bright		steam tempered		nitrided lands		nitrided		golden brown		TiAlN		TiAlN nanoA		TiAlN SuperA
--	--------	--	----------------	--	----------------	--	----------	--	--------------	--	-------	--	-------------	--	--------------



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank subland drills

Gühring std.	N		right-hand	Solid carbide	○	6,000 - 15,000	738	102	583
Gühring std.	N		right-hand	HSS	●	5,900 - 17,500	514	138	584
DIN 8378	N		right-hand	HSS	●	3,400 - 13,500	540	138	585
Gühring std.	N		right-hand	Solid carbide	○	4,500 - 11,000	739	102	585

Taper shank subland drills

Gühring std.	N		right-hand	HSS	●	11,500 - 30,000	637	138	586
Gühring std.	N		right-hand	HSS	●	11,000 - 29,000	537	138	586
Gühring std.	N		right-hand	HSS	●	18,000 - 26,000	639	138	587
DIN 8377	N		right-hand	HSS	●	10,000 - 33,000	539	138	588
Gühring std.	N		right-hand	HSS	●	9,400 - 33,000	520	138	589
DIN 8379	N		right-hand	HSS	●	9,000 - 22,000	541	138	590



Standard	Form	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Center drills without flat

ASA	A		right-hand	HSS	○	1,190 - 7,940	594	138	591
ASA	B		right-hand	HSS	○	1,190 - 6,350	595	138	592
BS 328	A		right-hand	HSS	○	1,190 - 7,940	292	138	593
BS 328	A		left-hand	HSS	○	1,190 - 7,940	294	138	593
DIN 333	A		right-hand	HSS	○	0,500 - 12,500	581	132	594
DIN 333	A		left-hand	HSS	○	0,500 - 12,500	582	138	594
DIN 333	R		right-hand	HSS	○	0,500 - 12,500	583	138	594
DIN 333	R		left-hand	HSS	○	0,800 - 5,000	584	138	594
DIN 333	A		right-hand	HSS	○	1,000 - 12,500	590	138	595
DIN 333	A		right-hand	HSS	Ⓢ	0,500 - 8,000	613	133	595
DIN 333	R		right-hand	HSS	Ⓢ	0,800 - 8,000	614	139	595
DIN 333	A		right-hand	HSCO	○	1,000 - 4,000	381	138	595
Gühring std.	A		right-hand	Solid carbide	○	0,500 - 6,300	736	102	595
DIN 333	A		right-hand	HSS	○	0,500 - 10,000	281	138	596
DIN 333	A		left-hand	HSS	○	0,800 - 5,000	282	138	596

○ bright	◐ steam tempered	◑ nitrided lands	● nitrided	● golden brown	Ⓐ TiAlN	ⓐ TiAlN nanoA	Ⓐ TiAlN SuperA
----------	------------------	------------------	------------	----------------	---------	---------------	----------------



Standard	Form	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Center drills

Center drills without flat

DIN 333	R		right-hand	HSS	○	0,500 - 10,000	283	138	596
DIN 333	R		left-hand	HSS	○	1,600 - 4,000	284	138	596
DIN 333	B		right-hand	HSS	○	1,000 - 10,000	585	138	597
DIN 333	B		left-hand	HSS	○	1,000 - 10,000	586	138	597
DIN 333	B		right-hand	HSS	○	1,000 - 10,000	591	138	597
Guhring std.	A		right-hand	HSS	○	1,000 - 3,150	280	138	598
Guhring std.	B		right-hand	HSS	○	1,000 - 6,300	285	138	599

Center drills with flat

DIN 333	A		right-hand	HSS	○	1,600 - 10,000	587	138	600
DIN 333	R		right-hand	HSS	○	1,000 - 10,000	588	138	600
DIN 333	A		right-hand	HSS	○	1,600 - 10,000	287	138	601
DIN 333	R		right-hand	HSS	○	1,600 - 8,000	288	138	601
DIN 333	B		right-hand	HSS	○	1,600 - 8,000	589	138	602
Guhring std.	B		right-hand	HSS	○	1,600 - 5,000	289	138	603



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Guhring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

Straight shank core drills

Guhring std.	N		right-hand	Carbide		3,800 - 15,000	750	102	604
DIN 344	N		right-hand	HSS		3,800 - 20,000	533	138	605

Taper shank core drills

Guhring std.	N		right-hand	Carbide		26,700 - 40,000	729	102	608
DIN 343	N		right-hand	HSS		7,800 - 50,000	534	138	609
DIN 343	N		right-hand	HSCO		8,500 - 26,000	634	138	609
DIN 1864	N		right-hand	HSCO		8,000 - 15,000	635	138	613
DIN 1864	N		right-hand	HSS		5,000 - 31,000	555	138	614


bright	steam tempered	nitrided lands	nitrided	golden brown	TiAlN	TiAlN nanoA	TiAlN SuperA
--------	----------------	----------------	----------	--------------	-------	-------------	--------------



Standard	Type	Tool illustration	Cutting direction	Tool material	Surface	d1	Gühring no.	Discount group	Standard range page
----------	------	-------------------	-------------------	---------------	---------	----	-------------	----------------	---------------------

General attachments

Oil feed adapters

Gühring std.						-	230	138	615
--------------	---	--	--	--	--	---	------------	-----	-----



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤3xD drilling depth

1171
6538K
Carbide
P
RT 80 U
S
axial
236

1660	1180	1181
6537K	6537K	6537K
Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P
RT 100 F	RT 100 F	RT 100 U
S	S	S
axial	axial	axial
187	187	186

2468	2477	2469
6537K	6537K	6537K
Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P
RT 100 F	RT 100 U	RT 100 U
F	F	F
axial	axial	axial
187	186	186

8510	8610
6537K	6537K
Sol. carb.	Sol. carb.
K/P	K/P
RT 100 VA	
a	a
axial	axial
187	187

8520	8620
6537K	6537K
Sol. carb.	Sol. carb.
K/P	K/P
RT 100 HF	
Y	Y
axial	axial
187	187

Twist Drills



V _c m/min	Feed column no.	V _c m/min	Feed column no.			V _c m/min	Feed column no.			V _c m/min	Feed column no.		V _c m/min	Feed column no.	
95	6	110	6	6	6	145	7	7	7	145	7	7			
80	5	90	5	5	5	120	6	6	6	120	6	6			
95	7	130	7	7	7	170	8	8	8	170	8	8			
75	6	110	7	7	7	145	8	8	8	145	8	8			
80	6	100	7	7	7	130	8	8	8	130	8	8			
75	6	95	6	6	6	125	7	7	7	125	7	7			
70	6	90	6	6	6	120	7	7	7	120	7	7			
75	6	90	6	6	6	120	7	7	7	120	7	7			
60	5	80	6	6	6	105	7	7	7	105	7	7			
90	7	110	7	7	7	145	8	8	8	145	8	8			
75	6	90	6	6	6	120	7	7	7	120	7	7			
60	5	65	4	4	4	85	5	5	5	85	5	5			
75	6	85	6	6	6	110	7	7	7	110	7	7			
60	5	80	4	4	5	105	5	5	5	105	5	5			
45	5	60	5	5	5	80	6	6	6	80	6	6			
35	5	50	4	4	4	65	5	5	5	65	5	5			
40	4	45	3	3	3	60	4	4	4	60	4	4			
		45	2	2	2	60	3	3	3	60	3	3			
40	2	45	4	4	4	60	5	5	5	60	5	5			
35	2	40	2	2	2	55	2	2	2	55	3	3			
35	2	35	4	4	4	45	5	5	5	45	5	5			
		40	2	2	2	55	3	3	3	55	3	3			
		20	1	1	1	35	2	2	2	35	2	2			
		25	3	3	3	35	4	4	4	35	4	4			
150	7	160	8	8	8	210	9	9	9						
110	7	120	8	8	8	160	9	9	9						
110	7	100	8	8	8	140	9	9	9						
90	6	95	7	7	7	130	8	8	8						
		30	2	2	2	40	3	3	3						
		35	3	3	3	45	4	4	4						
		30	2	2	2	40	3	3	3						
200	8	240	8	8	8	310	9	9	9						
200	8	240	8	8	8	310	9	9	9						
170	8	200	8	8	8	260	9	9	9						
140	7	170	8	8	8	220	9	9	9						
		230	7	7	7	280	8	8	8						
		95	6	6	6	125	7	7	7						
		250	7	7	7	325	8	8	8						
		170	6	6	6	220	7	7	7						
		95	6	6	6	125	7	7	7						
		80	5	5	5	105	6	6	6						
		70	5	5	5	90	6	6	6						
		60	5	5	5	80	6	6	6						



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Al especially suitable for machining aluminium

G especially suitable for machining cast iron

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input type="radio"/>
Chilled cast iron	-		≤350 HB	<input type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input type="radio"/>
Kevlar	Kevlar	≤1000		<input type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤3xD drilling depth

1702	1184	1242
6539	6537K	6539
Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P
RT 100 F	RT 100 U	RT 100 U
S	S	S
179	168	179


2475	2480	2472	2473
6537K	6537K	6537K	6539
Sol. carb.	Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P	K/P
RT 100 F	RT 100 U	RT 100 U	RT 100 U
F	F	F	F
168	168	168	179

8524
6537K
Sol. carb.
K/P
RT 100 HF
Y
168

≤4xD

768	6068
G.S.	G.S.
Sol. carb.	Sol. carb.
K	K
RT 150 GG	RT 150 GG
axial	axial
200	200
Al	G

Twist Drills



Vc m/min	Feed column no.		
100	6	6	6
85	5	5	5
110	7	7	7
85	6	6	6
90	6	6	6
85	6	6	6
80	6	6	6
80	6	6	6
75	5	5	5
100	7	7	7
90	6	6	6
65	4	4	4
75	5	5	5
70	4	4	4
50	5	5	5
40	4	4	4
40	3		
35	2	2	2
40	2	2	2
15	2	1	1
35	2	2	2
35	1	1	1
20	1	1	1
20	3	3	3
160	7	7	7
120	7	7	7
120	7	6	6
95	7	6	6
25	2	2	2
15	1	1	1
15	1	1	1
200	8	8	8
200	8	8	8
170	8	8	8
140	7	7	7
200	7	7	7
80	6	6	6
210	7	7	7
140	6	6	6
80	5	5	5
65	5	5	5
60	4	4	4
45	4	4	4

Vc m/min	Feed column no.			
130	7	7	7	7
110	6	6	6	6
145	8	8	8	8
110	7	7	7	7
120	7	7	7	7
110	7	7	7	7
105	7	7	7	7
105	7	7	7	7
100	6	6	6	6
130	8	8	8	8
120	7	7	7	7
85	5	5	5	5
100	6	6	6	6
90	5	5	5	5
65	6	6	6	6
55	5	5	5	5
55	4			
45	3	3	3	3
40	2	2	2	2
15	1	1	1	1
35	2	2	2	2
40	1	1	1	1
20	1	1	1	1
25	4	4	4	4
210	8	8	8	8
155	8	8	8	8
155	8	7	7	7
125	8	7	7	7
35	3	3	3	3
15	1	1	1	1
15	1	1	1	1
260	9	9	9	9
260	9	9	9	9
220	9	8	8	8
180	8	8	8	8
260	8	8	8	8
105	7	7	7	7
270	8	8	8	8
180	7	7	7	7
105	6	6	6	6
85	6	6	6	6
80	5	5	5	5
60	5	5	5	5

Vc m/min	Feed column no.
130	7
110	6
145	8
110	7
120	7
110	7
105	7
105	7
100	6
130	8
120	7
85	5
100	6
90	5
65	6
55	5
55	4
45	3
40	2
15	1
35	2
40	1
20	1
25	4
15	1
15	1

Vc m/min	Feed column no.	
120	7	7
100	7	7
90	7	7
80	7	7
40	2	2
410	9	7
410	9	7
380	9	7
330	9	7
280	9	9
110	6	6
80	5	5



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input type="radio"/>
Chilled cast iron	-		≤350 HB	<input type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input type="radio"/>
Kevlar	Kevlar	≤1000		<input type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- AlTiN SuperA



≤5xD drilling depth

1172
6538M
Carbide
P
RT 80 U
S
axial
239

6501
6537L
Sol. carb.
K/P
RT 100 R
F
axial
205

1662	1182	1663	1183
	6537L	6537L	6537L
Sol. carb.	Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P	K/P
RT 100 F	RT 100 F	RT 100 U	RT 100 U
S	S	S	S
axial	axial	axial	axial
205	205	204	204

2478	2470	2479	2471
6537L	6537L	6537L	6537L
Sol. carb.	Sol. carb.	Sol. carb.	Sol. carb.
K/P	K/P	K/P	K/P
RT 100 F	RT 100 F	RT 100 U	RT 100 U
F	F	F	F
axial	axial	axial	axial
205	205	204	204

Twist Drills



V _c m/min	Feed column no.	V _c m/min	Feed column no.	V _c m/min	Feed column no.				V _c m/min	Feed column no.			
95	5			110	6	6	6	6	145	7	7	7	7
80	4			90	5	5	5	5	120	6	6	6	6
95	6			130	7	7	7	7	170	8	8	8	8
75	5			110	7	7	7	7	145	8	8	8	8
80	5			100	7	7	7	7	130	8	8	8	8
75	5			95	6	6	6	6	125	7	7	7	7
75	5			90	6	6	6	6	120	7	7	7	7
75	5			90	6	6	6	6	120	7	7	7	7
55	4			80	6	6	6	6	105	7	7	7	7
90	6			110	7	7	7	7	145	8	8	8	8
75	5			90	6	6	6	6	120	7	7	7	7
55	4			80	6	6	6	6	105	7	7	7	7
90	6			110	7	7	7	7	145	8	8	8	8
75	5			90	6	6	6	6	120	7	7	7	7
55	4			65	4	4	4	4	85	5	5	5	5
70	5			85	6	6	6	6	105	7	7	7	7
55	4			80	4	4	5	5	100	5	5	5	5
40	4			60	5	5	5	5	70	6	6	6	6
35	4			50	4	4	4	4	55	5	5	5	5
40	3			45	3	3	4	4	60	4	4	5	5
				45	2	2	2	2	60	3	3	3	3
				45	4	4	4	4	60	5	5	5	5
				40	2	2	2	2	55	2	2	2	2
				35	4	4	4	4	50	5	5	5	5
				40	2	2	2	2	55	3	3	3	3
				25	1	1	1	1	35	2	2	2	2
				25	3	3	3	3	35	4	4	4	4
150	6	210	9	160	8	8	8	8	195	9	9	9	9
110	6	160	9	120	8	8	8	8	160	9	9	9	9
110	6	160	9	100	8	8	8	8	140	9	9	9	9
90	5	130	8	95	7	7	7	7	130	8	8	8	8
				30	2	2	2	2	40	3	3	3	3
				35	3	3	3	3	45	4	4	4	4
				30	2	2	2	2	40	3	3	3	3
200	7			240	8	8	8	8	310	9	9	9	9
200	7			240	8	8	8	8	310	9	9	9	9
170	7			200	8	8	8	8	260	9	9	9	9
140	6			170	8	8	8	8	220	9	9	9	9
				230	7	7	7	7	280	8	8	8	8
				95	6	6	6	6	125	7	7	7	7
				250	7	7	7	7	325	8	8	8	8
				170	6	6	6	6	220	7	7	7	7
				95	6	6	6	6	125	7	7	7	7
				80	5	5	5	5	105	6	6	6	6
				70	5	5	5	5	90	6	6	6	6
				60	5	5	5	5	80	6	6	6	6
		130	8										
		100	8										
		80	8										
		60	8										



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Pilot holes are always necessary for drilling depths over 7 x D:

1. The pilot hole can be produced with a short, rigid drill. The diameter should be 0.01 - 0.02 mm larger than the diameter of the Ratio drill. Drilling depth $\geq 1 \times D$.
2. Alternatively, the Ratio Drills can produce their own pilot hole. Cutting speed and feed rate must therefore be reduced by 30-40%.
3. A coolant pressure of 40 bar is recommended.

For safety reasons it is very important, that a drill does not exceed a speed of $n = 6\,000$ rev./min when not supported. The centrifugal forces could break these long tools before reaching the workpiece surface!

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Al especially suitable for machining aluminium

G especially suitable for machining cast iron

Guhring no.

Standard/DIN

Tool material

Carbide grade

Type

Surface finish

Cooling

Std. range page

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1 3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤400 ≤650		<input checked="" type="radio"/>
Al wrought alloys	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Magnesium alloys	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Copper, low-alloyed	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
Brass, short-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
long-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn	≤600 ≤850		<input checked="" type="radio"/>
Bronze, short-chipping	2.0790 CuNi18Zn19Pb			<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input type="radio"/>
Chilled cast iron	-		≤350 HB	<input type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input type="radio"/>
Kevlar	Kevlar	≤1000		<input type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤15xD

773
G.S.
Sol. carb.
K
RT 150 GN
○
227

≤15xD

6509
G.S.
Sol. carb.
K/P
RT 100 T
ⓐ
40 bar MQL
228

≤20xD

6511
G.S.
Sol. carb.
K/P
RT 100 T
ⓐ
40 bar MQL
230

≤25xD

6512
G.S.
Sol. carb.
K/P
RT 100 T
ⓐ
40 bar MQL
232

≤30xD

6513
G.S.
Sol. carb.
K/P
RT 100 T
ⓐ
40 bar MQL
234

≤40xD

6514
G.S.
Sol. carb.
K/P
RT 100 T
ⓐ
40 bar
235



V _c m/min	Feed column no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.	V _c m/min	Feed no.
		110	8			110	8			100	8			80	7		
		110	8			110	8			100	8			80	7		
		120	8			120	8			120	8			100	8		
		120	8			120	8			100	8			100	8		
		110	6			110	6			110	6			110	6		
		110	8			110	8			100	8			80	7		
		100	7			100	7			100	7			80	7		
		110	7	80	7	110	7	80	7	100	7	70	7	80	7	60	6-7
		110	6	80	7	110	6	80	7	100	6	70	7	80	6	60	7
		110	8			110	8			100	8			80	7		
		110	7	80	6-7	110	7	80	6-7	100	7	70	6-7	80	6	60	6-7
		110	6	80	6-7	110	6	80	6-7	100	6	70	6-7	80	6	60	6-7
		100	5			100	5			80	5			80	5		
		80	5			80	5			60	5			60	5		
		100	6-7			100	6			90	6			80	6		6-7
		80	5			80	5			70	4			70	4		4
		50	5			50	5			50	4			50	4		4
		50	5			50	5			50	4			50	4		4
		100	5			100	5			100	5			80	5		5
		70	2-3			60	3			60	3			60	3		2-3
		100	5			100	5			100	5			80	5		5
		50	4			50	4			50	4			50	4		4
		30	2			30	2			30	2			30	2		2
120	5	140	8			140	8			130	8			120	8		8
100	5	100	8			100	8			90	8			80	8		8
90	5	140	8			140	8			130	8			120	8		8
80	5	100	8			100	8			90	8			80	8	65	8
40	1																
410	6																
410	6																
380	7																
330	7																
		120	1			120	1			120	1			120	1		1
280	6	120	8			120	8			110	8			100	8		8
110	5																
80	4																
		100	6			100	6			90	6			80	6		6
		100	6			100	6			90	6			80	6		6
		90	8	90	8	90	8	90	8	80	8	80	8	70	8	70	8



Ratio drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Carbide grade
Type
Surface finish
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



Interchangeable Insert Drilling Systems

Twist Drills

All data are approximate values. The actually achievable cutting speeds and feed rates depend on the respective machining conditions. We recommend suitable drilling trials.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Drilling depth
Surface finish
Application
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		●
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Interchangeable Insert Drilling Systems

Twist Drills

All data are approximate values. The actually achievable cutting speeds and feed rates depend on the respective machining conditions. We recommend suitable drilling trials.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Drilling depth
Surface finish
Application
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

- Coolant:
- Air
 - Neat oil
 - Soluble oil

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○ ●
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○ ●
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○ ●
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○ ●
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○ ●
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		○ ●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		○ ●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		○ ●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		○ ●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○ ●
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		○ ●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		○ ●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		○ ●
Hardened steels	-		≤48 HRC ≤66 HRC	○ ●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		○ ●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○ ●
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○ ●
Chilled cast iron	-		≤350 HB	○ ●
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		○ ●
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○ ●
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○ ●
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○ ●
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○ ●
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○ ●
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○ ●
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○ ●
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○ ●
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○ ●
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○ ●
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○ ●
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○ ●
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○ ●
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○ ●
Kevlar	Kevlar	≤1000		○ ●
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○ ●

- bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Interchangeable Insert Drilling Systems

Twist Drills

All data are approximate values. The actually achievable cutting speeds and feed rates depend on the respective machining conditions. We recommend suitable drilling trials.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

Gühring no.
Standard/DIN
Tool material
Carbide grade
Drilling depth
Surface finish
Application
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		●
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Interchangeable Insert Drilling Systems

Twist Drills

All data are approximate values. The actually achievable cutting speeds and feed rates depend on the respective machining conditions. We recommend suitable drilling trials.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuehringNavigator on the internet: www.guehring.de.

Guehring no.
Standard/DIN
Tool material
Carbide grade
Drilling depth
Surface finish
Application
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

- Coolant:
- Air
 - Neat oil
 - Soluble oil

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		●
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

- bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



RT 800 WP ≤3xD

≤5xD

≤7xD

2747
G.S.
S. carb.
K
3xD
○
cast i./Al
289

1047
G.S.
S. carb.
K/P
3xD
S
steels
293

2485
G.S.
S. carb.
K/P
3xD
F
steels
291

2747
G.S.
S. carb.
K
5xD
○
cast i./Al
289

1047
G.S.
S. carb.
K/P
5xD
S
steels
293

2485
G.S.
S. carb.
K/P
5xD
F
steels
291

2747
G.S.
S. carb.
K
7xD
○
cast i./Al
289

1047
G.S.
S. carb.
K/P
7xD
S
steels
293

2485
G.S.
S. carb.
K/P
7xD
F
steels
291

Twist Drills

V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.
		100	6	130	6			95	6	125	6			90	5	120	5
		85	5	110	5			80	5	105	5			80	4	105	4
		100	7	130	7			95	7	125	7			90	6	120	6
		85	6	110	6			80	6	105	6			80	5	105	5
		100	6	130	6			95	6	125	6			90	5	120	5
		95	6	125	6			90	6	120	6			85	5	110	5
		85	5	110	5			80	5	105	5			75	4	100	4
		85	6	110	6			80	6	105	6			75	5	100	5
		70	5	90	5			65	5	85	5			65	4	85	4
		100	7	130	7			95	7	125	7			90	6	120	6
		85	6	110	6			80	6	105	6			75	5	100	5
		55	4	70	4			55	4	70	4			55	4	70	4
		80	5	105	5			80	5	105	5			80	4	105	4
		55	4	70	4			55	4	70	4			55	3	70	3
		40	5	55	5			40	5	55	5			40	4	55	4
		35	4	50	4			35	4	50	4			35	3	50	3
		40	3	55	3			40	3	55	3			40	2	55	2
		35	2	50	2			35	2	50	2			35	2	50	2
		40	3	55	3			40	3	55	3			40	2	55	2
		30	3	40	3			30	3	40	3			30	2	40	2
		25	3	35	3			25	3	35	3			25	2	35	2
		20	2	25	2			20	2	25	2			20	1	25	1
		20	2	25	2			20	2	25	2			20	1	25	1
100	7	160	7	210	7	90	7	150	7	195	7	90	6	150	6	195	6
80	7	80	7	155	7	70	7	110	7	145	7	70	6	110	6	145	6
80	7	120	7	155	7	70	7	110	7	145	7	70	6	110	6	145	6
70	6	100	6	130	6	60	6	90	6	120	6	60	5	90	5	120	5
10	2	25	2	35	2	10	2	25	2	35	2	10	2	25	2	35	2
		30	3	40	3			30	3	40	3			30	2	40	2
		25	2	35	2			25	2	35	2			25	1	35	1
200	7	220	7	290	7	180	7	200	7	260	7	180	6	200	6	260	6
180	7	200	7	260	7	180	7	200	7	260	7	180	6	200	6	260	6
150	7	180	7	235	7	140	7	170	7	220	7	140	6	170	6	220	6
120	7	150	7	195	7	110	7	140	7	180	7	110	6	140	6	180	6
180	7	200	7	260	7	180	7	200	7	260	7	180	6	200	6	260	6
70	6	80	6	105	6	70	6	80	6	105	6	70	5	80	5	105	5
180	7	210	7	270	7	180	7	210	7	270	7	180	6	210	6	270	6
120	6	140	6	180	6	120	6	140	6	180	6	120	5	140	5	180	5
70	6	80	6	105	6	70	6	80	6	105	6	70	5	80	5	105	5
50	6	65	6	85	6	50	6	65	6	85	6	50	5	65	5	85	5
45	6	50	6	65	6	45	6	50	6	65	6	45	5	50	5	65	5
35	5	40	5	55	5	35	5	40	5	55	5	35	4	40	4	55	4
50	5	80	5	105	5	50	5	80	5	105	5	50	4	80	4	105	4
50	5	80	5	105	5	50	5	80	5	105	5	50	4	80	4	105	4
50	5	80	5	105	5	50	5	80	5	105	5	50	4	80	4	105	4
50	5	80	5	105	5	50	5	80	5	105	5	50	4	80	4	105	4

C TiCN Cb Carbo D Cristall F FIRE/nanoFIRE P AlCrN S TiN S+ TiN+ M MolyGlide Y Signum



Interchangeable Insert Drilling Systems

Twist Drills

All data are approximate values. The actually achievable cutting speeds and feed rates depend on the respective machining conditions. We recommend suitable drilling trials.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GühringNavigator on the internet: www.guehring.de.

- for through holes supporting lands must remain in permanent contact
- for 7 x D, centering is recommended with equal point angle of 140°, or larger, to min. 2/3 cutting edge diameter (do not apply standard centre drill to DIN 332). If centering is impossible, spot-drill with reduced feed.
- interrupted cutting (grooves, cross holes, oblique entry/exit) is not recommended without prior tests. We recommend reducing the feed by 50% if possible.
- the standard LT800 tool system is also suitable for drilling up to 55.9mm diameter in stacked metal sheets. For the drilling of stacked metal sheets above diameter 56 mm, the standard cartridge must be replaced with a cartridge with a suitable indexable insert arrangement.
- when replacing the central interchangeable insert (RT800), we recommend replacing the clamping screw with a new one (with clamping thread protection)
- with turning machines (vertical drilling tool), it must be ensured the tool operates precisely on centre.
- pre-requisite for optimal machining results is a sufficient coolant supply. The tool possesses only limited suitability for dry machining or minimal quantity lubrication applications. The cutting speed should be reduced by approximately 30% whilst retaining the same feed rate.

Safety recommendations:

- with rotating workpieces, a disc is created on hole break through. Due to the centrifugal effect there is a possible risk of accident. Safety precautions must be followed.
- in order to prevent damage to machine and tool, we recommend the prior determination of the required power and torque.

Tool material
Carbide grade
Drilling depth
Holder size
nom. Ø range mm

Coolant:

- Air
- Neat oil
- Soluble oil


Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7025 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	●
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		●
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



LT 800 WP

Carbide	Carbide	Carbide	Carbide	Carbide	Carbide	Carbide	Carbide
depend. on insert		depend. on insert		depend. on insert		depend. on insert	
≤3xD	≤3xD	≤6xD	≤6xD	≤9xD	≤9xD	≤12xD	≤12xD
400...560	600...950	400...560	600...950	400...560	600...950	400...560	600...950
40...<60	60...100	40...<60	60...100	40...<60	60...100	40...<60	60...100

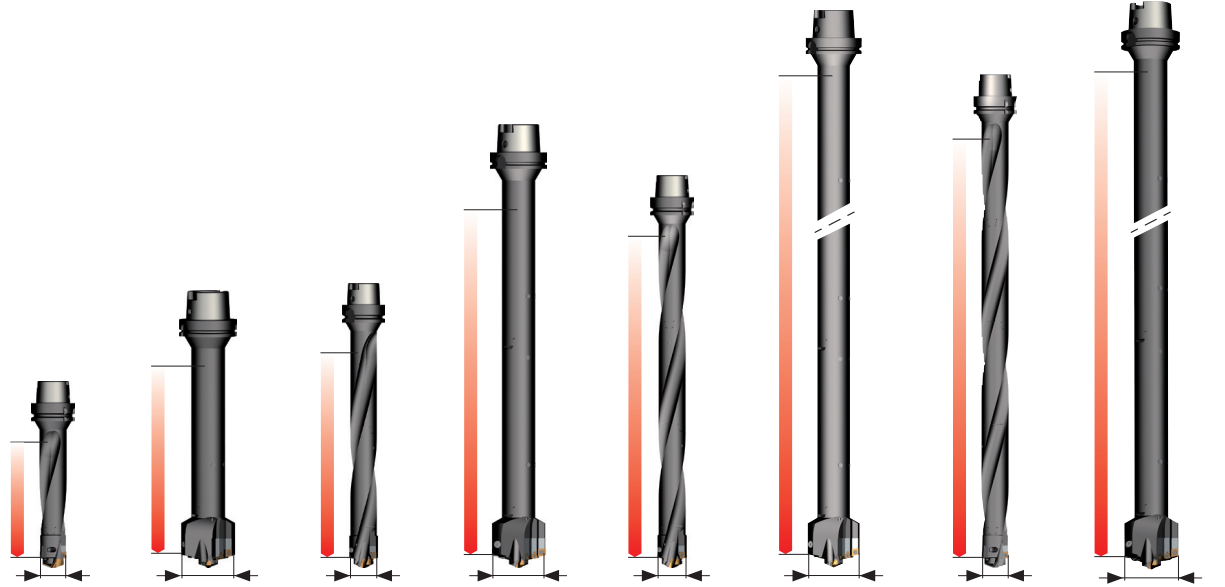

Twist Drills

Feed rate f (mm/rev.)	V _c m/min							
0,20...0,40	110...150	130...180	100...130	120...155	70...120	85...145	60...110	70...130
0,20...0,40	100...130	120...155	90...120	110...145	70...110	85...130	60...110	70...130
0,20...0,40	110...150	130...180	100...130	120...155	70...120	85...145	60...120	70...145
0,15...0,30	100...130	120...160	90...120	110...145	70...110	85...130	60...110	70...130
0,20...0,40	100...130	120...155	90...120	110...145	80...110	100...130	70...100	85...120
0,20...0,40	90...120	110...145	80...110	100...130	70...100	85...120	60...90	70...110
0,15...0,35	80...110	100...130	70...100	85...120	60...90	70...110	55...80	65...100
0,20...0,40	80...110	100...130	70...100	85...120	60...90	70...110	55...80	65...100
0,15...0,35	70...100	85...120	65...90	80...110	60...80	70...100	55...75	65...90
0,20...0,40	90...120	110...145	80...110	100...130	70...100	85...120	60...90	70...110
0,20...0,40	80...110	100...130	70...100	85...120	60...90	70...110	55...80	65...100
0,15...0,35	70...100	85...120	65...90	80...110	60...80	70...100	55...75	65...90
0,20...0,40	80...110	100...130	70...100	85...120	60...90	70...110	55...80	65...100
0,15...0,35	70...100	85...120	65...90	80...110	60...80	70...100	55...75	65...90
0,20...0,40	70...100	85...120	65...95	80...115	60...90	70...110	55...80	65...100
0,15...0,35	70...90	85...110	65...90	80...110	60...80	70...100	55...75	65...90
0,15...0,35	70...100	85...120	65...95	80...115	60...90	70...110	55...85	65...100
0,15...0,35	60...90	70...110	55...85	65...100	50...80	50...100	45...75	55...90
0,15...0,35	55...85	65...100	50...80	60...100	45...75	55...90	40...70	50...85
0,30...0,60	120...200	145...240	110...180	130...220	100...160	120...190	90...150	110...180
0,30...0,60	100...160	120...190	90...150	110...180	85...140	100...170	80...130	100...155
0,30...0,60	100...160	120...190	90...150	110...180	85...140	100...170	80...130	100...155
0,20...0,40	80...120	100...145	70...110	85...130	60...100	70...120	55...90	65...110
0,30...0,60	200...300	240...360	180...280	220...340	160...260	190...310	140...240	170...290
0,30...0,60	180...280	220...340	170...260	200...310	155...250	185...300	135...235	160...280
0,30...0,60	160...240	190...290	150...230	180...280	140...220	170...260	130...210	155...250
0,30...0,60	140...200	170...240	130...190	160...230	120...180	145...220	110...170	130...200
0,30...0,60	120...200	145...240	110...180	130...220	100...160	120...190	90...150	110...180
0,20...0,40	140...200	170...240	130...190	160...230	120...180	145...220	110...170	130...200
0,30...0,60	120...200	145...240	110...180	130...220	100...160	120...190	90...150	110...180
0,20...0,40	120...200	145...240	110...180	130...220	100...160	120...190	90...150	110...180
0,20...0,40	140...200	170...240	130...190	160...230	120...180	145...220	110...170	130...200
0,15...0,35	140...200	170...240	130...190	160...230	120...180	145...220	110...170	130...200



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.

Guhring no.

Standard/DIN

Tool material

Surface finish

Type

Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		
Hardened steels	-		≤48 HRC ≤66 HRC	
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	
Chilled cast iron	-		≤350 HB	
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		
Kevlar	Kevlar	≤1000		
Glass, carbon concentrated plastics	GFK/CFK	≤1000		

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- AITIN SuperA



≤3xD drilling depth


223	224	225	552
226	227	228	553
1897	1897	1897	1897
HSS			
N	H	W	GT 80
382	382	382	382

653
672
1897
HSS
S
N
383

2460
1897
HSS
F
N
383

329	363	1261	128	129	1259
330				136	
1897	G.S.	1897	G.S.	G.S.	1897
HSCO					M42
GV 120	GV 120	VA	N	N	N
383	523	383	438	439	414

Twist Drills

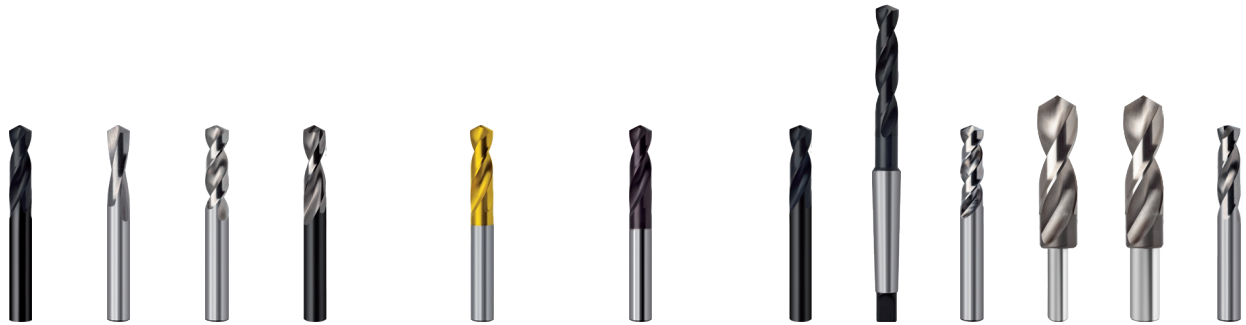

V _c m/min	Feed column no.				V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed column no.					
27	6			6	30	6	32	7	35	5	5	5			5
22	5			5	24	5	26	6	30	5	5	5			5
30	6			6	33	6	36	7	40	5	5	5			5
30	5			5	33	5	36	6	40	5	5	5	5	5	5
25	5			5	28	5	31	6	40	5	5	5	5		5
25	5			5	28	5	31	6	40	5	5				5
					25	4	28	5	35	4	4		4	4	4
					22	4	24	5	20	4	4		4	4	4
									16	3	3		3	3	3
30	6			6	33	6	36	7	36	6	6	6			6
					20	4	22	5	20	4	4		4	4	4
					14	4	16	5	15	3	3		3	3	3
16	4			4	18	4	20	5	16	4	4		4	4	4
									12	3	3		3	3	3
									15	4	4		4	4	4
									12	3	3		3	3	3
									15	3	3		3	3	3
									8	2	2		2	2	2
									18	4	4	4	4	4	4
									14	3	3	3	3	3	3
									16	3	3	3	3	3	3
									4	1	1				1
									8	1	1		1	1	1
30	6			6	33	6	36	7	35	6	6				5
30	6			6	33	6	36	7	30	6	6				5
25	6			6	28	6	31	7	30	6	6				5
20	6			6	22	6	24	7	25	6	6				5
									10	3	3				3
									10	2	2	2			2
									6	2	2	2			2
70			7	7				85	8			7			7
70			7	7				85	8			7			7
50	7		7	7				60	8			7			7
50	6		6	6				60	7			6			6
70	6	6	6	6	80	6	90	6	70	6	6	6			6
60	5		5	5	65	5	70	6	40	5	5	5			5
70		6			75	5	80	6	60	5	5	5			5
40	5		5	5	45	5	50	6	40	5	5	5			5
30	4	4	4	4	33	4	36	5	35	4	4	4			4
25	4			4	27	4	30	5	30	4	4	4			4
15	4			4	16	4	18	5	20	4	4	4			4
					15	4	18	5	15	4	4	4			4
18	4	4	4	4	22	4	29	5	20	4	4		4	4	
28	5	5	5	5	36	5	47	6	30			4			4



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤3xD drilling depth

2048	1228	2498	659	663	2461	512	515
1897	1897	1897	1897	G.S.	1897	G.S.	1897
HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	HSS-E-PM
M	S	F	S	S	F	S	F
P2000	GT 80	GT 80	GV 120	GV 120	GV 120	GU 500	GT 500
383	383	383	383	523	383	426	414

Twist Drills



V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed column no.		V _c m/min	Feed col. no.	V _c m/min	Feed col. no.	V _c m/min	Feed col. no.
35	6	38	6	42	6	38	5	5	42	6	38	6	42	6
30	5	33	5	36	5	33	4	4	36	5	33	5	37	5
40	6	44	6	48	7	44	5	5	48	6	44	6	47	7
40	5	38	5	42	6	38	5	5	42	6	40	6	44	6
40	5	44	6	48	6	44	5	5	48	6	44	6	47	6
40	5	44	5	48	6	44	5	5	48	6	44	6	47	6
35	4	38	4	42	5	38	4	4	42	5	40	5	44	5
25	4	27	4	30	5	27	4	4	30	5	27	4	30	4
20	3	22	3	24	4	22	3	3	24	4	22	3	25	3
40	6	44	4	48	4	44	4	4	48	5	44	6	47	4
20	4	22	4	24	5	22	4	4	24	5	22	4	25	5
15	3	18	3	20	4	18	3	3	20	4	18	3	20	4
20	4	22	4	24	5	22	4	4	24	5	22	4	25	5
15	3	18	3	20	4	18	3	3	20	4	16	3	18	4
18	4	19	4	21	5	19	4	4	21	5	20	4	22	5
12	3	14	3	16	4	14	3	3	16	4	15	3	17	4
12	3	14	3	17	4	14	3	3	17	4	13	3	14	4
8	2	9	2	11	3	9	2	2	11	3	9	2	10	2
14	4	15	4	17	4	20	4	4	22	5	20	4	22	4
10	3	10	3	12	3	15	3	3	17	4	16	3	18	3
12	3	12	3	14	3	18	3	3	20	4	18	4	20	3
						4	1	1	5	2				
5	2					6	2	2	7	2			6	2
38	6	45	6	50	7	40	6	6	45	7	45	6	50	7
30	6	40	6	45	7	35	6	6	40	7	40	6	44	7
30	6	33	6	36	7	33	6	6	36	7	40	6	44	7
25	6	27	6	29	7	27	6	6	29	7	30	6	33	7
10	3	8	3	10	4	12	3	3	14	4			16	4
						11	2	2	12	3				
						7	2	2	8	3				
90	7													
90	7													
80	7													
70	6													
85	6													
80	5	88	5	96	6						80	6		
70	5	77	5	84	6						88	5		
40	5	44	5	48	6						77	5		
											44	5		
40	4	45	5	50	5	45	5	5	50	6	45	4	50	5
30	4	40	4	45	5	40	4	4	45	5	40	4	44	5
25	4	22	4	25	5	23	4	4	26	5	30	4	33	5
15	4	17	4	20	5	17	4	4	20	5	25	4	28	5
20	4	22	4	24	5						22	4		
25	5	27	5	30	5						27	4		



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Carbide grade
Surface finish
Type
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤3xD drilling depth

730	702	1149	710	703	705	704	707	2463	1946
6539	G.S.	G.S.	G.S.	8037	8041	8038	G.S.	6539	6537K
Sol. carb.	Sol. carb.	Sol. carb.	Carbide	Carbide	Carbide	Carbide	Carbide	Solid carbide	Solid carbide
K10/K20								K/P	K/P
○	○	○	○	○	○	○	○	F	A
N	N	N	Duro 150	N	N	N	N	N	H
414	420	520	376	517	575	517	521	414	436

Twist Drills



V _c m/min	Feed column no.						V _c m/min	Feed col. no.	V _c m/min	Feed col. no.
80	4						104	5		
70	4						91	5		
80	5		4	4	4		104	6		
70	4		3	3	3		91	5		
80	4						104	5		
70	4						91	5		
60	4						78	5		
60	4						78	5		
80	5						104	6	80	6
60	4						78	5		
50	4						65	5	65	4
50	3						65	4	80	4
25	2		2	2	2	2				
25	2						32	3		
15	1						32	2		
25	2						20	1		
20	2		3	3	3		32	2		
10			2	2	2		26	4	40	2
15	2								30	1
90	4		4	4	4		20	2		
80	4		4	4	4		117	5	90	8
80	4		4	4	4		104	5	80	8
80	4		4	4	4		91	5	80	8
70	4		4	4	4		104	5	70	7
10			1	1	1	1			30	2
15	1						15	1		
15	1						15	1		
200	7						260	8		
200	7						260	8		
150	6						195	7		
120	6						156	7		
180	6						234	6		
80	5						104	6		
180	5		5	5	5		234	6		
180	5		5	5	5		234	6		
120	5						156	6		
120	5						156	6		
70	4						91	5		
50	3						65	4		
50	4	4					65	5		
40	3	3				3	52	4		
150			1							
80	3	3				2	104	4		



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.

Guhring no.

Standard/DIN

Tool material

Surface finish

Type

Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤5xD drilling depth

560	205	240	268	229	245	592	251	206	246	207	247	549	558
	208			248				209		210		550	
338	338	338	G.S.	345	345	345	346	338	345	338	345	338	345
HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS
○	○ ^{>0} _{2,36}	○	○	○	○ ^{>0} _{2,36}	○ ^{>0} _{16,0}	○	○	○	○	○	○ ^{>0} _{2,36}	○ ^{>0} _{16,0}
N	N	N	N	N	N	N	N	H	H	W	W	GT 100	GT 100
313	312	313	437	525	525	525	545	312	525	312	525	313	525

Twist Drills



V _c m/min	Feed column no.												
27	6	6	6	6	6	6	6	6				6	6
22	5	5	5	5	5	5	5	5				5	5
30	6	6	6	6	6	6	6	6				6	6
30	5	5	5	5	5	5	5	5				5	5
25	5	5	5	5	5	5	5	5				5	5
25	5	5	5	5	5	5	5	5				5	5
30	6	6	6	6	6	6	6	6				6	6
16		4	4	4	4	4	4	4				4	4
30	6	6	6	6	6	6	6	6				6	6
30	6	6	6	6	6	6	6	6				6	6
25	6	6	6	6	6	6	6	6				6	6
25	6	6	6	6	6	6	6	6				6	6
70	7	7	7	7	7	7	7	7			7	7	7
70	6	6	6	6	6	6	6	6				6	6
50	6	6	6	6	6	6	6	6	6	6		6	6
50	5	5	5	5	5	5	5	5			5	5	5
70									6	6			
40	5	5	5	5	5	5	5	5				5	5
30	4	4	4	4	4	4	4	4	4	4			
25	4	4	4	4	4	4	4	4	4	4			
15	4	4	4	4	4	4	4	4				4	4
18	4	4	4	4	4	4	4	4	4	4			4
28	5	5	5	5	5	5	5	5	5	5	5	5	5



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.

Guhring no.

Standard/DIN

Tool material

Surface finish

Type

Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		
Hardened steels	-		≤48 HRC ≤66 HRC	
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	
Chilled cast iron	-		≤350 HB	
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		
Kevlar	Kevlar	≤1000		
Glass, carbon concentrated plastics	GFK/CFK	≤1000		

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- AITIN SuperA



≤5xD drilling depth

651	654	2456	652	606	2457
664			665		
338	345	338	338	345	338
HSS	HSS	HSS	HSS	HSS	HSS
S	S	F	S	S	F
N	N	N	GT 100	GT 100	GT 100
313	537	313	313	537	313

305	345	351	622	645	605	1260	1262	1146
308					608			
338	345	346	338	345	338	338	345	338
HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	M42
N	N	N	GT 100	GT 100	Ti	VA	VA	N
350	537	545	350	537	350	351	543	351

Twist Drills



V _c m/min	Feed column no.					
32	6	6	7	6	6	7
26	5	5	6	5	5	6
36	6	6	7	6	6	7
36	5	5	6	5	5	6
31	5	5	6	5	5	6
31	5	5	6	5	5	6
28	4	4	5	4	4	5
24	4	4	5	4	4	5
36	6	6	7	6	6	7
22	4	4	5	4	4	5
16	4	4	5	4	4	5
20	4	4	5	4	4	5
36	6	6	7	6	6	7
36	6	6	7	6	6	7
31	6	6	7	6	6	7
24	6	6	7	6	6	7
85			8			8
85			8			8
60			8			8
60			8			7
90	6	6	7			7
70	5	5	6	5	5	6
80	5	5	6	5	5	6
50	5	5	6	5	5	6
36	4	4	5			
33	4	4	5			
18	4	4	5	4	4	5
18	4	4	5	4	4	5
29	4	4	5	4	4	5
36	5	5				

V _c m/min	Feed column no.								
35	5	5	5	5	5		5	5	5
30	5	5	5	5	5		5	5	5
40	5	5	5	5	5		5	5	5
40	5	5	5	5	5		5	5	5
40	5	5	5	5	5		5	5	5
40	5	5	5	5	5		5	5	5
35	4	4	4	4	4				5
20	4	4	4	4	4				4
16	3	3	3	3	3	3			3
36	6	6	6	6	6	6	6	6	6
20	4	4	4	4	4				3
15	3	3	3	3	3	3			3
16	4	4	4	4	4				3
12	3	3	3	3	3	3			3
15	4	4	4	4	4				3
12	3	3	3	3	3	3			3
15	3	3	3	3	3	3			3
8	2	2	2	2	2				2
18	4	4	4	4	4	4	4	4	3
14	3	3	3	3	3	3	3	3	
16	3	3	3	3	3	3	3	3	3
4									1
8						1			1
35	6	6	6	6	6				5
30	6	6	6	6	6				5
30	6	6	6	6	6				5
28	6	6	6	6	6				5
10	3	3	3	3	3	3			3
10						2	2	2	2
6						2	2	2	2
90							7	7	7
90							7	7	7
80				7	7		7	7	7
70				6	6		6	6	6
70							6	6	6
40	5	5	5	5	5		5	5	5
60							5	5	5
40	5	5	5	4	4		5	5	5
35	4	4	4				4	4	4
33	4	4	4				4	4	4
20	4	4	4	4	4		4	4	4
15	4	4	4	4	4		1	1	4
20	4	4	4	4	4				



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- Ⓡ right-hand cutting
- Ⓛ left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		○
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- Ⓡ TiAlN
- Ⓡ TiAlN nanoA
- Ⓡ TiAlN SuperA



≤5xD drilling depth

2997	661	658	662	2459	657	2458
338	345	338	345	338	338	338
HSCO	HSCO	HSCO	HSCO	HSCO	HSCO	HSCO
S	S	S	S	F	S	F
N	N	GT 100	GT 100	GT 100	Ti	Ti
351	537	351	537	351	350	351

1223	1224	1221	1222
338	345	338	345
HSCO	HSCO	HSCO	HSCO
A	A	C	C
GT 100	GT 100	GT 100	GT 100
351	543	351	537

Twist Drills



Vc m/min	Feed column no.					
42	6	6	6	6	6	
36	5	5	5	5	5	
48	5	5	5	5	6	
42	5	5	5	5	6	
48	5	5	5	5	6	
42	4	4	4	4	5	
30	4	4	4	4	5	
34	3	3	3	3	4	3 4
48	4	4	4	4	6	
24	4	4	4	4	5	
20	3	3	3	3	4	
24	4	4	4	4	5	
20	3	3	3	3	4	
21	4	4	4	4	5	
16	3	3	3	3	4	
17	3	3	3	3	4	3 4
11	2	2			3	2 2
22	4	4	4	4	5	4 5
17	3	3			4	3 3
20			3	3	4	3 4
6					1	
7						2 2
45	6	6	6	6	7	
40	6	6	6	6	7	
36	6	6	6	6	7	
29	6	6	6	6	7	
14					4	3 3
12						2 2
8						2 2
85					8	
72					7	
96	5	5	5	5	6	
40	4	4				
25	4	4	4	4	5	
20	4	4	4	4	5	4 4
24	4	4	4	4	5	

Vc m/min	Feed column no.			
42			6	6
36			6	6
48			6	6
42	5	5	6	6
48				
42				
30			5	5
34			5	5
34			4	4
48			7	7
24			5	5
20			4	4
20			5	5
15			4	4
21			5	5
16			4	4
17			4	4
11			3	3
22			5	5
18			4	4
45	7	7		
40	7	7		
36	7	7		
29	7	7		
85	7	7		
96	6	6		
25	5	5		
20	5	5		
24	5	5		



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- Ⓡ right-hand cutting
- Ⓛ left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		○
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		○
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		○
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		○
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		○
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		○
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		○
Hardened steels	-		≤48 HRC ≤66 HRC	○
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		○
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		○
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- Ⓡ TiAlN
- Ⓛ TiAlN nanoA
- Ⓛ TiAlN SuperA



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.

Guhring no.

Standard/DIN

Tool material

Surface finish

Type

Cooling

Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		
Free-cutting steels	1.0718 11SMnPB30 (9SMnPB28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		
Hardened steels	-		≤48 HRC ≤66 HRC	
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	
Chilled cast iron	-		≤350 HB	
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		
Kevlar	Kevlar	≤1000		
Glass, carbon concentrated plastics	GFK/CFK	≤1000		

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- AITIN SuperA



≤10xD drilling depth

561	211	204	217	257	523
220					
339	339	340	340	341	G.S.
HSS	HSS	HSS	HSS	HSS	HSS
N	N	N	N	N	N
465	465	472	472	547	554

218	219	501	505	535	551
221					
340	340	340	341	340	341
HSS	HSS	HSS	HSS	HSS	HSS
H	W	GT50	GT50	GT 100	GT 100
472	472	472	547	473	547

666	667	655	668	656	2462
339					
340	341	340	341	340	340
HSS	HSS	HSS	HSS	HSS	HSS
N	N	N	GT 100	GT 100	GT 100
465	473	547	473	547	473

Twist Drills



V _c m/min	Feed column no.					
24	6	6	6	6	6	6
20	5	5	5	5	5	5
27	6	6	6	6	6	6
27	5	5	5	5	5	5
22	5	5	5	5	5	5
22	5	5	5	5	5	5
27	6	6	6	6	6	6
14	4	4	4	4	4	4
27	6	6	6	6	6	6
27	6	6	6	6	6	6
22	6	6	6	6	6	6
18	6	6	6	6	6	6
45	7	7	7	7	7	7
45	6	6	6	6	6	6
63	6	6	6	6	6	6
54	5	5	5	5	5	5
36	5	5	5	5	5	5
28	4	4	4	4	4	4
22	4	4	4	4	4	4
22	4	4	4	4	4	4
14	4	4	4	4	4	4
22	5	5	5	5	5	5

V _c m/min	Feed column no.					
24				6	6	
20				5	5	
27				6	6	
27				5	5	
22				5	5	
22				5	5	
27				6	6	
14				4	4	
27				6	6	
27				6	6	
22				6	6	
18				6	6	
65		7	7	7		
65		7	7	7		
45		7		7	7	
45				6	6	
63	6		6	6		
54		5		5	5	
63	6					
36				5	5	
28	4					
22						
22				4	4	
14	4			4	4	
22	5	5	5	5		

V _c m/min	Feed column no.					
30	6	6	6	6	6	7
24	5	5	5	5	5	6
33	6	6	6	6	6	7
33	5	5	5	5	5	6
28	5	5	5	5	5	6
28	5	5	5	5	5	6
24	4	4	4	4	4	5
23	4	4	4	4	4	5
33	6	6	6	6	6	7
18	4	4	4	4	4	5
15	4	4	4	4	4	5
19	4	4	4	4	4	5
13	3	3	3	3	3	4
33	6	6	6	6	6	7
33	6	6	6	6	6	7
26	6	6	6	6	6	7
22	6	6	6	6	6	7
55	7	7	7	7	7	8
55	6	6	6	6	6	7
70	6	6	6			
65	5	5	5	5	5	6
44	5	5	5	5	5	6
30	4	4	4			
25	4	4	4			
16	4	4	4	4	4	5
14	4	4	4	4	4	5
23	4	4	4	4	4	5
32	5	5	5			



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



≤10xD drilling depth

390	269	270	271	272	1101
G.S.	G.S.	G.S.	G.S.	G.S.	G.S.
HSS	HSS	HSS	HSS	HSS	HSS
○	●	●	●	●	●
N	N	N	N	N	N
axial	radial	axial	radial	radial	DIN 228 BK
464	555	558	558	558	557

>10xD drilling depth

235	236	237	266	267	524	528	529	525	542
1869	1869	1869	1870	1870	1869	1869	1869	1870	1870
HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS
○	●	●	●	●	○	○	○	○	○
N	N	N	N	N	GT50	GT50	GT50	GT50	GT50
497	502	505	563	566	497	502	505	563	566

Twist Drills



V _c m/min	Feed column no.					
26	6	6	6	6	6	6
22	5	5	5	5	5	5
30	6	6	6	6	6	6
30	5	5	5	5	5	5
24	5	5	5	5	5	5
24	5	5	5	5	5	5
22	4	4	4	4	4	4
20	4	4	4	4	4	4
14	3	3	3	3	3	3
30	6	6	6	6	6	6
17	4	4	4	4	4	4
12	3	3	3	3	3	3
14	4	4	4	4	4	4
10	3	3	3	3	3	3
15	4	4	4	4	4	4
10	3	3	3	3	3	3
10	3	3	3	3	3	3
7	2	2	2	2	2	2
30	6	6	6	6	6	6
30	6	6	6	6	6	6
24	6	6	6	6	6	6
20	6	6	6	6	6	6
7	3	3	3	3	3	3
80	6	6	6	6	6	6
50	7	7	7	7	7	7
50	6	6	6	6	6	6
60	5	5	5	5	5	5
40	5	5	5	5	5	5
24	4	4	4	4	4	4
24	4	4	4	4	4	4
22	4	4	4	4	4	4
24	5	5	5	5	5	5

	Feed column no.					
22	5	5	5	5	5	5
18	4	4	4	4	4	4
20	5	5	5	5	5	5
20	4	4	4	4	4	4
25	4	4	4	4	4	4
25	4	4	4	4	4	4
12	3	3	3	3	3	3
22	5	5	5	5	5	5
10	3	3	3	3	3	3
8	3	3	3	3	3	3
12	3	3	3	3	3	3
6	2	2	2	2	2	2
6	2	2	2	2	2	2
22	5	5	5	5	5	5
18	5	5	5	5	5	5
20	5	5	5	5	5	5
14	5	5	5	5	5	5
55				6	6	6
55				6	6	6
45	6	6	6	6	6	6
36	5	5	5	5	5	5
55	5	5	5	5	5	5
22	4	4	4	4	4	4
45	4	4	4	4	4	4
28	4	4	4	4	4	4
22	3	3	3	3	3	3
20	3	3	3	3	3	3
18	3	3	3	3	3	3
12	3	3	3	3	3	3
18	4	4	4	4	4	4



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



>10xD drilling depth

502	503	504	242	243	244	526	527	563	564	565	566	293	298	299	670	671
1869	1869	1869	G.S.	G.S.	G.S.	1870	1870	G.S.	G.S.	G.S.	G.S.	G.S.	G.S.	G.S.	1869	1869
HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS	HSS
GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100	GT 100
497	503	505	508	509	510	563	566	569	570	571	569	570	572	572	497	502

Twist Drills



V _c m/min	Feed column no.															V _c m/min	Feed column no.		
22	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	28	5	5
18	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	22	4	4
22	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	28	5	5
18	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	22	4	4
22	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	22	4	4
18	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	22	4	4
																	16	3	3
22	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	28	5	5
12	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	12	3	3
6	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	8	2	2
22	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	6	1	1
18	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	28	5	5
20	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	25	5	5
14	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	18	5	5
45	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	70	6	6
36	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	70	6	6
55	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	55	6	6
22	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	45	5	5
28	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	70	5	5
22	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	28	4	4
20	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	36	4	4
18	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	28	3	3
12	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	25	3	3
18	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	22	3	3
																	18	3	3
																	15	3	3
																	22	4	4



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Carbide grade
Surface finish
Type
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		<input checked="" type="radio"/>
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		<input checked="" type="radio"/>
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		<input checked="" type="radio"/>
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		<input checked="" type="radio"/>
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		<input checked="" type="radio"/>
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		<input checked="" type="radio"/>
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		<input checked="" type="radio"/>
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		<input checked="" type="radio"/>
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		<input checked="" type="radio"/>
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	<input checked="" type="radio"/>
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		<input checked="" type="radio"/>
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		<input checked="" type="radio"/>
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		<input checked="" type="radio"/>
Hardened steels	-		≤48 HRC ≤66 HRC	<input checked="" type="radio"/>
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		<input checked="" type="radio"/>
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	<input checked="" type="radio"/>
Chilled cast iron	-		≤350 HB	<input checked="" type="radio"/>
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		<input checked="" type="radio"/>
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		<input checked="" type="radio"/>
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		<input checked="" type="radio"/>
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		<input checked="" type="radio"/>
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		<input checked="" type="radio"/>
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		<input checked="" type="radio"/>
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		<input checked="" type="radio"/>
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		<input checked="" type="radio"/>
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		<input checked="" type="radio"/>
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		<input checked="" type="radio"/>
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		<input checked="" type="radio"/>
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		<input checked="" type="radio"/>
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		<input checked="" type="radio"/>
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	<input checked="" type="radio"/>
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		<input checked="" type="radio"/>
Kevlar	Kevlar	≤1000		<input checked="" type="radio"/>
Glass, carbon concentrated plastics	GFK/CFK	≤1000		<input checked="" type="radio"/>

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.
Standard/DIN
Tool material
Surface finish
Type
Cooling
Std. range page

Drill Ø mm	Feed column no.								
	1	2	3	4	5	6	7	8	9
	f (mm/rev.)								
0.500	0.004	0.006	0.007	0.008	0.010	0.012	0.014	0.016	0.019
1.000	0.006	0.008	0.012	0.014	0.016	0.018	0.020	0.023	0.025
2.000	0.020	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125
2.500	0.025	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160
3.150	0.032	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.160
4.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.200
5.000	0.040	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250
6.300	0.050	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315
8.000	0.063	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.315
10.000	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.400
12.500	0.080	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500
16.000	0.100	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630
20.000	0.125	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.630
25.000	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	0.800
31.500	0.160	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000
40.000	0.200	0.250	0.315	0.400	0.500	0.630	0.800	1.000	1.250
50.000	0.250	0.310	0.400	0.500	0.630	0.800	1.000	1.250	1.250
63.000	0.315	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600
80.000	0.400	0.500	0.630	0.800	1.000	1.250	1.600	1.600	2.000

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- Ⓡ right-hand cutting
- Ⓛ left-hand cutting

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		○
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		○
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		○
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		○
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		○
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		●
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		●
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		●
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		●
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	○
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		●
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		●
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		●
Hardened steels	-		≤48 HRC ≤66 HRC	●
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		●
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	○
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	○
Chilled cast iron	-		≤350 HB	○
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		○
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		○
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		○
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		○
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		○
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		○
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		○
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		○
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		○
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		○
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		○
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		○
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		○
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	○
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		○
Kevlar	Kevlar	≤1000		○
Glass, carbon concentrated plastics	GFK/CFK	≤1000		○

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- Ⓡ TiAlN
- Ⓡ TiAlN nanoA
- Ⓡ TiAlN SuperA



>10xD drilling depth

618	619	620	621
1869	1869	1870	1870
HSCO	HSCO	HSCO	HSCO
GT 100	GT 100	GT 100	GT 100
497	502	563	566

571
1869
HSCO
GT 100
505

370	371	372
G.S.	G.S.	G.S.
HSCO	HSCO	HSCO
GT 100	GT 100	GT 100
axial	radial	radial
558	558	558

374	375	376
G.S.	G.S.	G.S.
HSCO	HSCO	HSCO
GT 100	GT 100	GT 100
axial	radial	radial
561	561	561

Twist Drills



V _c m/min	Feed column no.			
30	4	4	4	4
25	4	4	4	4
33	4	4	4	4
30	4	4	4	4
33	4	4	4	4
33	4	4	4	4
20	3	3	3	3
14	3	3	3	3
10	2	2	2	2
29	4	4	4	4
14	3	3	3	3
10	2	2	2	2
10	3	3	3	3
8	2	2	2	2
11	3	3	3	3
8	2	2	2	2
8	2	2	2	2
5	1	1	1	1
10	3	3	3	3
8	2	2	2	2
10	2	2	2	2
3	1	1	1	1
5	1	1	1	1
20	5	5	5	5
16	5	5	5	5
5	2	2	2	2
6	1	1	1	1
5	1	1	1	1
50	6	6	6	6
40	5	5	5	5
30	4	4	4	4
45	4	4	4	4
30	4	4	4	4
25	4	4	4	4
20	4	4	4	4
16	3	3	3	3
10	3	3	3	3
14	3	3	3	3
20	3	3	3	3

V _c m/min	Feed col. no.
30	4
25	4
33	4
30	4
33	4
33	4
20	3
14	3
10	2
29	4
14	3
10	2
10	3
8	2
11	3
8	2
8	2
5	1
10	3
8	2
10	2
3	1
5	1
20	5
16	5
5	2
6	1
5	1
50	6
40	5
30	4
45	4
30	4
25	4
20	4
16	3
10	3
14	3
20	3

V _c m/min	Vorschubreihen- Code		
35	6	6	6
30	5	5	5
30	6	6	6
30	5	5	5
35	5	5	5
29	5	5	5
22	4	4	4
18	4	4	4
14	3	3	3
35	6	6	6
18	4	4	4
14	3	3	3
14	4	4	4
12	3	3	3
15	4	4	4
11	3	3	3
11	3	3	3
8	2	2	2
14	4	4	4
10	3	3	3
12	3	3	3
4	2	2	2
8	1	1	1
30	6	6	6
24	6	6	6
24	6	6	6
20	6	6	6
8	3	3	3
10	2	2	2
8	2	2	2
60	7	7	7
50	6	6	6
38	5	5	5
55	5	5	5
36	5	5	5
24	4	4	4
20	4	4	4
14	4	4	4
25	5	5	5

V _c m/min	Vorschubreihen- Code		
30	5	5	5
25	4	4	4
30	5	5	5
25	4	4	4
30	4	4	4
25	4	4	4
18	3	3	3
16	3	3	3
12	2	2	2
30	5	5	5
16	3	3	3
12	2	2	2
12	3	3	3
10	2	2	2
13	3	3	3
9	2	2	2
9	2	2	2
6	2	2	2
12	3	3	3
8	2	2	2
12	2	2	2
4	1	1	1
6	1	1	1
28	5	5	5
22	5	5	5
22	5	5	5
18	5	5	5
6	2	2	2
8	2	2	2
6	2	2	2
55	6	6	6
44	5	5	5
35	4	4	4
50	4	4	4
33	4	4	4
22	4	4	4
18	4	4	4
12	4	4	4
25	4	4	4



Micro-precision drills

Twist Drills

Tools with bold feed column no. are preferred choice.

To select the optimal tool and the recommended machining parameters for your application, please also use the electronic version of the GuhringNavigator on the internet: www.guehring.de.

Guhring no.

Guhring no.

Standard/DIN

Tool material

Carbide grade

Surface finish

Type

Cooling

Std. range page

Drill Ø mm	Feed column no.								
	101	102	103	104	105	106	107	108	109
	f (mm/rev.)								
0.10	0.002	0.003	0.003	0.004	0.006	0.007	0.010	0.013	0.016
0.16	0.002	0.003	0.004	0.005	0.007	0.009	0.012	0.016	0.022
0.25	0.003	0.004	0.005	0.007	0.009	0.011	0.014	0.019	0.024
0.30	0.004	0.005	0.007	0.009	0.011	0.015	0.019	0.025	0.033
0.50	0.005	0.007	0.008	0.011	0.014	0.019	0.024	0.031	0.041
0.63	0.007	0.009	0.012	0.015	0.020	0.026	0.034	0.044	0.057
0.80	0.010	0.013	0.016	0.020	0.024	0.031	0.038	0.048	0.060
1.00	0.020	0.024	0.029	0.035	0.041	0.050	0.060	0.072	0.086
1.50	0.030	0.035	0.040	0.046	0.052	0.060	0.069	0.080	0.092
2.00	0.040	0.046	0.053	0.061	0.070	0.080	0.093	0.106	0.122

Coolant:

- Air
- Neat oil
- Soluble oil

Cutting direction:

- right-hand cutting
- left-hand cutting

Drill Ø mm	Feed column no. for Guhring no. 6400/6401/6408/6412												
	56	57	58	59	60	61	62	63	64	65	66	67	68
	f (mm/rev.)												
0.50	0.006	0.012	0.018	0.022	0.030	0.035	0.040	0.045	0.050	0.050	0.055	0.060	0.060
0.80	0.008	0.016	0.024	0.032	0.040	0.050	0.060	0.070	0.080	0.080	0.080	0.090	0.090
1.00	0.012	0.022	0.032	0.042	0.060	0.070	0.080	0.090	0.100	0.100	0.110	0.110	0.120
1.50	0.021	0.036	0.051	0.066	0.090	0.100	0.120	0.130	0.150	0.150	0.160	0.170	0.180
2.00	0.032	0.052	0.072	0.092	0.120	0.140	0.160	0.180	0.200	0.210	0.220	0.230	0.240
2.50	0.045	0.070	0.095	0.120	0.150	0.170	0.200	0.220	0.250	0.260	0.270	0.280	0.300
3.00	0.060	0.090	0.120	0.150	0.180	0.210	0.240	0.270	0.300	0.310	0.330	0.340	0.360

Material group	Material examples, new description (old description in brackets) Figures in bold = material no. to DIN EN	Tensile strength MPa (N/mm ²)	Hardness	Coolant
Common structural steels	1.0035 S185(St33), 1.0486 P275N(StE285), 1.0345 P235GH(H1), 1.0425 P265GH(H2) 1.0050 E295 (St50-2), 1.0070 E360 (St70-2), 1.8937 P500NH (WStE500)	≤500 ≤1000		
Free-cutting steels	1.0718 11SMnPb30 (9SMnPb28), 1.0736 11SMn37 (9SMn36) 1.0727 46S20 (45S20), 1.0728 (60S20), 1.0757 46SPb20 (45SPb20)	≤850 ≤1000		
Unalloyed heat-treatable steels	1.0402 C22, 1.1178 C30E (Ck30) 1.0503 C45, 1.1191 C45E (Ck45) 1.0601 C60, 1.1221 C60E (Ck60)	≤700 ≤850 ≤1000		
Alloyed heat-treatable steels	1.5131 50MnSi4, 1.7003 38Cr2, 1.7030 28Cr4 1.5710 36NiCr6, 1.7035 41Cr4, 1.7225 42CrMo4	≤1000 ≤1400		
Unalloyed case hardened steels	1.0301 (C10), 1.1121 C10E (Ck10)	≤850		
Alloyed case hardened steels	1.7276 10CrMo11, 1.5125 11MnSi6 1.5752 15NiCr13, 1.7131 16MnCr5, 1.7264 20CrMo5	≤1000 ≤1400		
Nitriding steels	1.8504 34CrAl6 1.8519 31CrMoV9, 1.8550 34CrAlNi7	≤1000 ≤1400		
Tool steels	1.1750 C75W, 1.2067 102Cr6, 1.2307 29CrMoV9 1.2080 X210Cr12, 1.2083 X42Cr13, 1.2419 105WCr6, 1.2767 X45NiCrMo4	≤850 ≤1400		
High speed steels	1.3243 S 6-5-2-5, 1.3343 S 6-5-2, 1.3344 S 6-5-3	≤1400		
Spring steels	1.5026 55Si7, 1.7176 55Cr3, 1.8159 51CrV4 (51CrV4)		≤350 HB	
Stainless steels, sulphured	1.4005 X12CrS13, 1.4104 X14CrMoS17, 1.4105 X6CrMoS17, 1.4305 X8CrNiS18-9	≤900		
austenitic	1.4301 X5CrNi18-10 (V2A), 1.4541 X6CrNiTi18-10, 1.4571 X6CrNiMoTi 17-12-2 (V4A)	≤1100		
martensitic	1.4057 X20CrNi172 (X17CrNi16-2), 1.4122 X39CrMo17-1, 1.4521 X2CrMoTi18-2	≤1500		
Hardened steels	-		≤48 HRC ≤66 HRC	
Special alloys	Nimonic, Inconel, Monel, Hastelloy	≤2000		
Cast iron	0.6010 EN-GJL-100 (GG10), 0.6020 EN-GJL-200 (GG20) 0.6025 EN-GJL-250 (GG25), 0.6035 EN-GJL-350 (GG35)		≤240 HB ≤350 HB	
Spheroidal graphite iron and malleable cast iron	0.7050 EN-GJS-500-7 (GGG50), 0.8035 EN-GJMW-350-4 (GTW35) 0.7070 EN-GJS-700-2 (GGG70), 0.8170 EN-GJMB-700-2 (GTS70)		≤240 HB ≤350 HB	
Chilled cast iron	-		≤350 HB	
Ti and Ti-alloys	3.7024 Ti99,5, 3.7114 TiAl5Sn2,5, 3.7124 TiCu2 3.7154 TiAl6Zr5, 3.7165 TiAl6V4, 3.7184 TiAl4Mo4Sn2,5, - TiAl8Mo1V1	≤850 ≤1400		
Aluminium and Al-alloys	3.0255 Al99,5, 3.2315 AlMgSi1, 3.3515 AlMg1	≤400		
Al wrought alloys	3.0615 AlMgSiPb, 3.1325 AlCuMg1, 3.3245 AlMg3Si, 3.4365 AlZnMgCu1,5	≤650		
Al cast alloys ≤ 10 % Si	3.2131 G-AlSi5Cu1, 3.2153 G-AlSi7Cu3, 3.2573 G-AlSi9	≤600		
≤ 24 % Si	3.2581 G-AlSi12, 3.2583 G-AlSi12Cu, - G-AlSi12CuNiMg	≤600		
Magnesium alloys	3.5200 MgMn2, 3.5812.05 G-MgAl8Zn1, 3.5612.05 G-MgAl6Zn1	≤400		
Copper, low-alloyed	2.0070 SE-Cu, 2.1020 CuSn6, 2.1096 G-CuSn5ZnPb	≤500		
Brass, short-chipping	2.0380 CuZn39Pb2, 2.0401 CuZn39Pb3, 2.0410 CuZn43Pb2	≤600		
long-chipping	2.0250 CuZn20, 2.0280 CuZn33, 2.0332 CuZn37Pb0,5	≤600		
Bronze, short-chipping	2.1090 CuSn7ZnPb, 2.1170 CuPb5Sn5, 2.1176 CuPb10Sn 2.0790 CuNi18Zn19Pb	≤600 ≤850		
Bronze, long-chipping	2.0916 CuAl5, 2.0960 CuAl9Mn, 2.1050 CuSn10 2.0980 CuAl11Ni, 2.1247 CuBe2	≤850 ≤1000		
Duroplastics	Bakelit, Resopal, Pertinax, Moltopren	≤150		
Thermoplastics	Plexiglass, Hostalen, Novodur, Makralon	≤100		
New cast materials GGV	EN-GJV250 (GGV25), EN-GJV350 (GGV35) EN-GJV400 (GGV40), EN-GJV500 (GGV50), SiMo 6		≤220 HB ≤300 HB	
New cast materials ADI	EN-GJS-800-8 (ADI800), EN-GJS-1000-5 (ADI1000) EN-GJS-1200-2 (ADI1200), EN-GJS-1400-1 (ADI1400)	≤1000 ≤1400		
Kevlar	Kevlar	≤1000		
Glass, carbon concentrated plastics	GFK/CFK	≤1000		

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- AITIN SuperA



Ratio drills

Ratio drills

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 1184

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	168

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 2480

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	168

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 2472

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	168

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Close diameter tolerances
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 2475

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.70
Standard range page	168

Ratio drills without oil feed



Special geometry
 Maximum tool life
 High process reliability

heat treatable and alloyed steels up to 1200 N/mm²
 hardened steels 40 to 48 HRC
 Inconel, Monel, Hastelloy

Guhring no. 8524

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	Y
Type	RT 100 HF
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	168

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Ratio drills without oil feed



Optimized cutting geometry
Special web thinning
Special point grind
Very good self-centering characteristics
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Chatter-free, defined feed
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2717

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	174

Ratio drills without oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Very good self-centering characteristics
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Chatter-free, defined feed
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2996

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	174

Ratio drills without oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Very good self-centering characteristics
Highest cutting rates
Alignment accurate holes
Powerful machines
Chatter-free, defined feed
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2719

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	174

Ratio drills without oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Very good self-centering characteristics
Highest cutting rates
Short chips
Close diameter tolerances
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

high alloyed steels
stainless/acid/heat resistant steels
Inconel, Monel, Hastelloy
brass, bronzes
Aluminium and Al-alloys
Magnesium and Magnesium alloys
Titanium and Titanium alloys
sintered powder metals

Guhring no. 2712

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	174

Ratio drills without oil feed



Optimized cutting geometry
Special web thinning
Special point grind
Very good surface quality of hole
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Chatter-free, defined feed
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 1242

Standard	DIN 6539
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	179

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Ratio drills

Ratio drills

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 2473

Standard	DIN 6539
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	179

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Close diameter tolerances
 Alignment accurate holes
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 1702

Standard	DIN 6539
Tool material	Solid carbide
Surface	S
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	179

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 1243

Standard	Guhring std.
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	5.00
Standard range page	183

Ratio drills without oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Very good self-centering characteristics
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Chatter-free, defined feed
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 2474

Standard	Guhring std.
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	5.00
Standard range page	183

Ratio drills with oil feed



Optimized cutting geometry
 Special web thinning
 Special point grind
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Guhring no. 1181

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	186

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Ratio drills with oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Straight shank without flat
Highest cutting rates
Short chips
Alignment accurate holes
Application in hydraulic chucks
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2477

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	186

Ratio drills with oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2469

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	186

Ratio drills with oil feed



Optimized cutting geometry
Special web thinning
Special point grind
Straight shank without flat
Highest cutting rates
Short chips
Alignment accurate holes
Application in hydraulic chucks
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

high alloyed steels
stainless/acid/heat resistant steels
Inconel, Monel, Hastelloy
brass, bronzes
Aluminium and Al-alloys
Magnesium and Magnesium alloys
Titanium and Titanium alloys
sintered powder metals

Guhring no. 1660

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	S
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	187

Ratio drills with oil feed



Optimized cutting geometry
Special web thinning
Special point grind
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

high alloyed steels
stainless/acid/heat resistant steels
Inconel, Monel, Hastelloy
brass, bronzes
Aluminium and Al-alloys
Magnesium and Magnesium alloys
Titanium and Titanium alloys
sintered powder metals

Guhring no. 1180

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	S
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	187

Ratio drills with oil feed



Optimized cutting geometry
Special web thinning
Special point grind
nanoFIRE coating
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

high alloyed steels
stainless/acid/heat resistant steels
Inconel, Monel, Hastelloy
brass, bronzes
Aluminium and Al-alloys
Magnesium and Magnesium alloys
Titanium and Titanium alloys
sintered powder metals

Guhring no. 2468

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	F
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	187

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

stainless/acid/heat resistant steels
Titanium and Titanium alloys
Inconel, Monel, Hastelloy
high alloyed steels
Al-alloys

Gühring no. 8510

Standard **DIN 6537 K**

Tool material **Solid carbide**

Surface **A**

Type RT 100 VA

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 187

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

stainless/acid/heat resistant steels
Titanium and Titanium alloys
Inconel, Monel, Hastelloy
high alloyed steels
Al-alloys

Gühring no. 8610

Standard **DIN 6537 K**

Tool material **Solid carbide**

Surface **A**

Type RT 100 VA

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 187

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

heat treatable and alloyed steels up to 1200 N/
mm²
hardened steels 40 to 48 HRC
Inconel, Monel, Hastelloy

Gühring no. 8520

Standard **DIN 6537 K**

Tool material **Solid carbide**

Surface **Y**

Type RT 100 HF

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 187

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

heat treatable and alloyed steels up to 1200 N/
mm²
hardened steels 40 to 48 HRC
Inconel, Monel, Hastelloy

Gühring no. 8620

Standard **DIN 6537 K**

Tool material **Solid carbide**

Surface **Y**

Type RT 100 HF

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 187

Ratio drills with oil feed



Very good self-centering characteristics
High productivity
High cutting rates
Close diameter tolerances
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
Observe optimal coolant pressure
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

Aluminium and Al-alloys
with high Si-content

Gühring no. 768

Standard **Gühring std.**

Tool material **Solid carbide**

Surface **○**

Type RT 150 GG

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 120

Web thinned ≥Ø 3.00

Standard range page 200

○ bright

◐ steam tempered

◑ nitrided lands

● nitrided

● golden brown

A TiAIN

a TiAIN nanoA

A TiAIN SuperA



Ratio drills with oil feed



Very good self-centering characteristics
High productivity
High cutting rates
Close diameter tolerances
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
Observe optimal coolant pressure
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

short chipping cast materials

Gühring no. 6068

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GG
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	130
Web thinned ≥Ø	3.00
Standard range page	200

Ratio drills with oil feed



Optimized cutting edge geometry
Special web thinning
Special point grind
Straight shank without flat
Highest cutting rates
Short chips
Alignment accurate holes
Application in hydraulic chucks
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Gühring no. 1663

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	204

Ratio drills with oil feed



Optimized cutting edge geometry
Special web thinning
Special point grind
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Gühring no. 1183

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	S
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	204

Ratio drills with oil feed



Optimized cutting edge geometry
Special web thinning
Special point grind
nanoFIRE coating
Straight shank without flat
Highest cutting rates
Short chips
Alignment accurate holes
Application in hydraulic chucks
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Gühring no. 2479

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	204

Ratio drills with oil feed



Optimized cutting edge geometry
Special web thinning
Special point grind
nanoFIRE coating
Highest cutting rates
Short chips
Alignment accurate holes
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Gühring no. 2471

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	204

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Ratio drills

Ratio drills

Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 Straight shank without flat
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Application in hydraulic chucks
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 1662

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	S
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	205

Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 1182

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	S
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	205

Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Straight shank without flat
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Application in hydraulic chucks
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 2478

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	205

Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

high alloyed steels
 stainless/acid/heat resistant steels
 Inconel, Monel, Hastelloy
 brass, bronzes
 Aluminium and Al-alloys
 Magnesium and Magnesium alloys
 Titanium and Titanium alloys
 sintered powder metals

Guhring no. 2470

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 F
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	205

Ratio drills with oil feed



Special geometry
 Radius point grind
 nanoFIRE coating
 Maximum tool life
 High process reliability

CGI and ADI
 cast materials
 grey cast iron, malleable and spheroidal iron

Guhring no. 6501

Standard	DIN 6537 L
Tool material	Solid carbide
Surface	F
Type	RT 100 R
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	
Web thinned ≥Ø	3.00
Standard range page	205

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

stainless/acid/heat resistant steels
Titanium and Titanium alloys
Inconel, Monel, Hastelloy
high alloyed steels
Al-alloys

Guhring no. 8511

Standard **DIN 6537 L**

Tool material **Solid carbide**

Surface **A**

Type RT 100 VA

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 205

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

stainless/acid/heat resistant steels
Titanium and Titanium alloys
Inconel, Monel, Hastelloy
high alloyed steels
Al-alloys

Guhring no. 8611

Standard **DIN 6537 L**

Tool material **Solid carbide**

Surface **A**

Type RT 100 VA

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 205

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

heat treatable and alloyed steels up to 1200 N/mm²
hardened steels 40 to 48 HRC
Inconel, Monel, Hastelloy

Guhring no. 8521

Standard **DIN 6537 L**

Tool material **Solid carbide**

Surface **Y**

Type RT 100 HF

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 205

Ratio drills with oil feed



Special geometry
Maximum tool life
High process reliability

heat treatable and alloyed steels up to 1200 N/mm²
hardened steels 40 to 48 HRC
Inconel, Monel, Hastelloy

Guhring no. 8621

Standard **DIN 6537 L**

Tool material **Solid carbide**

Surface **Y**

Type RT 100 HF

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 205

Ratio drills with oil feed



Optimized cutting edge geometry
Special web thinning
Special point grind
Straight shank without flat
Highest cutting rates
Short chips
Alignment accurate holes
Application in hydraulic chucks
Powerful machines
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

structural and case hardened steels
cast steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
carbon steels, bronze, cast iron
high alloyed AlSi-alloys

Guhring no. 2711

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **S**

Type RT 100 U

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 3.00

Standard range page 218

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Straight shank without flat
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Application in hydraulic chucks
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Gühring no. 4044

Standard	Gühring std.
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	218

Ratio drills with oil feed



Optimized cutting edge geometry
 Special web thinning
 Special point grind
 nanoFIRE coating
 Highest cutting rates
 Short chips
 Alignment accurate holes
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

structural and case hardened steels
 cast steels, heat-treatable steels
 alloyed steels up to 1200 N/mm²
 carbon steels, bronze, cast iron
 high alloyed AlSi-alloys

Gühring no. 4045

Standard	Gühring std.
Tool material	Solid carbide
Surface	F
Type	RT 100 U
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	218

Ratio drills with oil feed



Special geometry
 Radius point grind
 nanoFIRE coating
 Maximum tool life
 High process reliability

CGI and ADI
 cast materials
 grey cast iron, malleable and spheroidal iron

Gühring no. 6502

Standard	Gühring std.
Tool material	Solid carbide
Surface	F
Type	RT 100 R
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	
Web thinned ≥Ø	4.00
Standard range page	218

Ratio drills with oil feed



Special geometry
 Maximum tool life
 High process reliability

heat treatable and alloyed steels up to 1200 N/mm²
 hardened steels 40 to 48 HRC
 Inconel, Monel, Hastelloy

Gühring no. 8522

Standard	Gühring std.
Tool material	Solid carbide
Surface	Y
Type	RT 100 HF
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	3.00
Standard range page	218

Ratio drills with oil feed



Very good self-centering characteristics
 High productivity
 High cutting rates
 Close diameter tolerances
 Very good surface quality of hole
 Application in hydraulic chucks
 Alignment accurate tool holders
 Powerful machines
 Observe optimal coolant pressure
 Max. conc. error of clamped tool 0.02 mm
 Play-free spindles

Aluminium and Al-alloys
 with high Si-content

Gühring no. 769

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GG
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	3.00
Standard range page	223



Ratio drills with oil feed



Very good self-centering characteristics
High productivity
High cutting rates
Close diameter tolerances
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
Observe optimal coolant pressure
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

short chipping cast materials

Gühring no. 6069

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GG
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	130
Web thinned ≥Ø	3.00
Standard range page	223

Ratio drills with oil feed



Very good self-centering characteristics
High productivity
High cutting rates
Close diameter tolerances
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
Observe optimal coolant pressure
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

Aluminium and Al-alloys
with high Si-content

Gühring no. 770

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GG
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	3.00
Standard range page	225

Ratio drills with oil feed



Very good self-centering characteristics
High productivity
High cutting rates
Close diameter tolerances
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
short chipping cast materials

short chipping cast materials

Gühring no. 6070

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GG
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	130
Web thinned ≥Ø	3.00
Standard range page	225

Ratio drills with oil feed



Negative helix
Extremely quiet spotting characteristics
High dynamic stability
For dimensionally very accurate holes
Very good surface quality of hole
Application in hydraulic chucks
Alignment accurate tool holders
Powerful machines
Observe optimal coolant pressure
Max. conc. error of clamped tool 0.02 mm
Play-free spindles

Aluminium and Al-alloys
with high Si-content
Cast Iron

Gühring no. 773

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	RT 150 GN
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	5.00
Standard range page	227

Ratio drills with oil feed



Special geometry
Optimised flute design
Maximum diameter of coolant ducts
Highest cutting rates
Short chips
Application in hydraulic chucks
Observe optimal coolant pressure

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Gühring no. 6509

Standard	Gühring std.
Tool material	Solid carbide
Surface	ⓐ
Type	RT 100 T
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	135
Web thinned ≥Ø	3.00
Standard range page	228

Ⓒ TiCN

Ⓒb Carbo

Ⓓ Cristall

Ⓕ FIRE/nanoFIRE

Ⓖ AlCrN

Ⓗ TiN

Ⓗ+ TiN+

Ⓜ MolyGlide

Ⓨ Signum



Ratio drills with oil feed



Special geometry
Optimised flute design
Maximum diameter of coolant ducts
Highest cutting rates
Short chips
Application in hydraulic chucks
Observe optimal coolant pressure

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6511

Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	RT 100 T
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	135
Web thinned ≥Ø	3.00
Standard range page	230

Ratio drills with oil feed



Special geometry
Optimised flute design
Maximum diameter of coolant ducts
Highest cutting rates
Short chips
Application in hydraulic chucks
Observe optimal coolant pressure

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6512

Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	RT 100 T
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	135
Web thinned ≥Ø	3.00
Standard range page	232

Ratio drills with oil feed



Special geometry
Optimised flute design
Maximum diameter of coolant ducts
Highest cutting rates
Short chips
Application in hydraulic chucks
Observe optimal coolant pressure

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6513

Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	RT 100 T
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	135
Web thinned ≥Ø	3.00
Standard range page	234

Ratio drills with oil feed



Special geometry
Optimised flute design
Maximum diameter of coolant ducts
Highest cutting rates
Short chips
Application in hydraulic chucks
Observe optimal coolant pressure

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6514

Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	RT 100 T
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	135
Web thinned ≥Ø	3.00
Standard range page	235

Ratio drills with oil feed



HSS holder with brazed carbide insert
Special geometry
Dampens vibrations and shocks
Highest cutting rates
Optimal chip fracture and short chips
Close diameter tolerances
Alignment accurate holes
Alignment accurate tool holders
Coolant press./volume s. Techn. Section
Powerful machines
Max. conc. error of clamped tool 0.02 mm

unalloyed/low alloyed steels
grey cast iron, spheroidal graphite iron
brass, bronzes, plastics, graphite

Guhring no. 1171

Standard	DIN 6538 K
Tool material	Carbide
Surface	S
Type	RT 80 U
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	140
Web thinned ≥Ø	9.50
Standard range page	236



Ratio drills with oil feed



HSS holder with brazed carbide insert
 Special geometry
 Dampens vibrations and shocks
 Highest cutting rates
 Optimal chip fracture and short chips
 Close diameter tolerances
 Alignment accurate holes
 Alignment accurate tool holders
 Coolant press./volume s. Techn. Section
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm

unalloyed/low alloyed steels
 grey cast iron, spheroidal graphite iron
 brass, bronzes, plastics, graphite

Guhring no. 1172

Standard **DIN 6538 M**

Tool material **Carbide**

Surface **S**

Type RT 80 U

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 9.50

Standard range page 239

Ratio drills with oil feed



HSS holder with brazed carbide insert
 Special geometry
 Dampens vibrations and shocks
 Highest cutting rates
 Optimal chip fracture and short chips
 Close diameter tolerances
 Alignment accurate holes
 Alignment accurate tool holders
 Coolant press./volume s. Techn. Section
 Powerful machines
 Max. conc. error of clamped tool 0.02 mm

unalloyed/low alloyed steels
 grey cast iron, spheroidal graphite iron
 brass, bronzes, plastics, graphite

Guhring no. 1173

Standard **DIN 6538 L**

Tool material **Carbide**

Surface **S**

Type RT 80 U

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned ≥Ø 9.50

Standard range page 241

3-flute Ratio drills



Short design
 Wide flutes
 Three flutes
 Optimal centering
 Very high feed rates
 Spotting on oblique surfaces
 Application under difficult conditions
 Reboring with interrupted cutting
 Maximum process reliability

cast iron
 long chipping Al alloys

Guhring no. 2713

Standard **DIN 6537 L**

Tool material **Solid carbide**

Surface **○**

Type FT 200 G

Cutting direction right-hand

Point geometry Spiro-point grind

Point angle ° 130

Web thinned ≥Ø 3.00

Standard range page 243

3-flute Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole

cast steel
 alloyed/unalloyed steels over 1000 N/mm²

Guhring no. 731

Standard **DIN 6539**

Tool material **Solid carbide**

Surface **○**

Type GS 200 U

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 150

Web thinned ≥Ø

Standard range page 245

3-flute Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole

cast steel
 alloyed/unalloyed steels over 1000 N/mm²

Guhring no. 611

Standard **DIN 6539**

Tool material **Solid carbide**

Surface **S**

Type GS 200 U

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 150

Web thinned ≥Ø

Standard range page 245

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



3-flute Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole

grey cast iron, chilled cast iron
 short chipping brass, bronze
 short chipping Al-alloys
 Al alloys with high Si-content
 fiber reinforced plastics
 Duroplastics
 Hardened steels

Gühring no. 745

Standard	DIN 6539
Tool material	Solid carbide
Surface	○
Type	GS 200 G
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	150
Web thinned ≥Ø	
Standard range page	245

3-flute Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole

Grey cast iron
 long chipping Al cast alloys

Gühring no. 1025

Standard	DIN 6539
Tool material	Solid carbide
Surface	○
Type	GS 200 G
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	150
Web thinned ≥Ø	
Standard range page	245

3-flute Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole

high tensile steels
 long chipping Al alloys

Gühring no. 1027

Standard	DIN 6539
Tool material	Solid carbide
Surface	Ⓢ
Type	GS 200 F
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	150
Web thinned ≥Ø	
Standard range page	245

3-flute stepped Ratio drills



Three flutes
 Very good self-centering characteristics
 For dimensionally very accurate holes
 Very good surface quality of hole


grey cast iron, chilled cast iron
 short chipping brass, bronze
 short chipping Al-alloys
 Al alloys with high Si-content
 fiber reinforced plastics
 Duroplastics

Gühring no. 1032

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	GS 200 G
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	150
Web thinned ≥Ø	
Standard range page	249



FR 90 chamfer collar

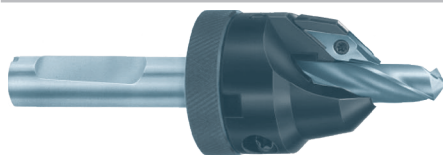


Product information
 For the production of tapping size holes with a 90° chamfer. Ideal combination: Ratio drill plus chamfer collar FR 90. In comparison with other designs, the FR 90 has the main advantage of also being suitable for use with standard carbide and high speed steel drills, with or without coolant ducts and with slow or quick helix angles. Modifications to the shank i.e. whistle notch flats or to the drill body for the indexable insert are not necessary. Especially suitable for the drilling of cast iron and AlSi-alloys, but also for structural and heat-treatable steels.

Guhring no. 1052

Standard	Guhring std.
Tool material	depend. on insert
Surface finish	depend. on insert
Type	FR 90
Cutting direction	rh
Grinding	
Point angle°	
Web thinned	
Standard range, page	311

Chamfer collar for tapping size holes

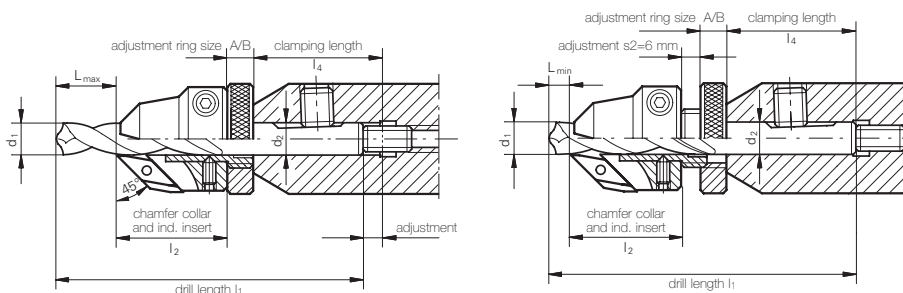

basic body		size	1	2	3	4	5	6	7	8	9	10	11	12	13	14
l ₂ mm		29	29	29	29	33	33	33	33	39	39	39	39	39	45	45
drill		d ₁ > mm	4,9	5-6	6-7	7-8	8-9	9-10	10-11	11-12	12-13	13-14	14-15	15-16	16-17	17-18
		d ₂ mm	6	6	8	8	10	10	12	12	14	14	16	16	18	18
		l ₄ mm	36	36	36	36	40	40	45	45	45	45	48	48	48	48
3 x D	A	L max	-	-	12	12	14	14	22	22	21	21	26	26	28	28
		L min	-	-	0	0	2	2	10	10	9	9	14	14	16	16
	B	L max	-	-	-	-	-	-	10	10	9	9	14	14	16	16
		L min	-	-	-	-	-	-	0	0	0	0	2	2	4	4
5 x D	A	L max	15	15	24	24	28	28	38	38	38	38	44	44	48	48
		L min	3	3	12	12	16	16	26	26	26	26	32	32	36	36
	B	L max	-	-	12	12	16	16	26	26	26	26	32	32	36	36
		L min	-	-	0	0	4	4	14	14	14	14	20	20	24	24

	Guhring no. 1156		Guhring no. 1056
	Standard Guhring std.		Standard Guhring std.
	Tool material Solid carbide		Tool material Solid carbide
	Carbide grade K		Carbide grade K/P
	Surface finish ○		Surface finish Ⓢ
	Standard range, page 310		Standard range, page 310
	Guhring no. 145		Guhring no. 1053
	Standard Guhring std.		Standard Guhring std.
	Chamfer collar		Clamping sleeve
	Standard range, page 311		Standard range, page 311
	Guhring no. 1054		Guhring no. 1055
	Standard Guhring std.		Standard Guhring std.
	Adjustment		Clamping piece
	Standard range, page 311		Standard range, page 310
	Guhring no. 1072		Guhring no. 4072
	Standard Guhring std.		Standard Guhring std.
	Torx screw		Adjusting element
	Standard range, page 311		Standard range, page 310
	Guhring no. 1612		Guhring no. 4912
	Standard Guhring std.		Standard Guhring std.
	Screwdriver		Screwdriver
	Standard range, page 311		Standard range, page 311

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

Guhring no. 4106

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 250

Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

Guhring no. 4107

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 253

Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

Guhring no. 4108

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 256

Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

Guhring no. 4109

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 259

Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

Guhring no. 4110

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 262

○ bright

○ steam tempered

● nitrided lands

● nitrided

● golden brown

Ⓐ TiAlN

Ⓐ TiAlN nanoA

Ⓐ TiAlN SuperA



Tool holders for interchangeable inserts HT 800



nickel-plated
Especially high wear resistance
Optimised flute design
Especially high rigidity

For piloting and countersinking 45°

Guhring no. 4105

Standard **Guhring std.**

Tool material

Surface

Type HT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 265

Interchangeable inserts HT 800



Especially high wear resistance
nanoFIRE coating

alloyed/unalloyed steel and cast steel

Guhring no. 4112

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **F**

Type

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned $\geq \emptyset$

Standard range page 266

Interchangeable inserts HT 800



Especially high wear resistance

grey cast iron, malleable and spheroidal iron

Guhring no. 4113

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **F**

Type

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned $\geq \emptyset$

Standard range page 267

Interchangeable inserts HT 800



Especially high wear resistance

Aluminium and Al-alloys
non-ferrous metals

Guhring no. 4114

Standard **Guhring std.**

Tool material **Solid carbide**

Surface \bigcirc

Type

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned $\geq \emptyset$

Standard range page 267

Interchangeable inserts HT 800



Especially high wear resistance

Stainless steels

Guhring no. 4115

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **a**

Type

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 140

Web thinned $\geq \emptyset$

Standard range page 267

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Interchangeable inserts HT 800



Especially high wear resistance

Piloting in all materials

Guhring no. 4111

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **a**

Type

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 145

Web thinned $\geq \emptyset$

Standard range page 274

Countersinking insert HT 800



Aluminium and Al-alloys
non-ferrous metals

Guhring no. 7635

Standard **Guhring std.**

Tool material **Solid carbide**

Surface

Type

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 278

Countersinking insert HT 800



alloyed/unalloyed steel and cast steel

Guhring no. 7645

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **S**

Type

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 279

Countersinking insert HT 800



grey cast iron, malleable and spheroidal iron

Guhring no. 7632

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **A**

Type

Cutting direction neutral

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 280

Tool holders for interchangeable inserts RT 800



Short design
high rigidity
high feed rates
Secure clamping of interchangeable insert in the holder.

Guhring no. 5242

Standard **Guhring std.**

Tool material

Surface

Type RT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 286

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Tool holders for interchangeable inserts RT 800



Short design
high rigidity
high feed rates
Secure clamping of interchangeable insert in the holder.

Guhring no. 5243

Standard **Guhring std.**

Tool material

Surface

Type RT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 287

Tool holders for interchangeable inserts RT 800



Short design
high rigidity
high feed rates
Secure clamping of interchangeable insert in the holder.

Guhring no. 5248

Standard **Guhring std.**

Tool material

Surface

Type RT 800 WP

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 288

Interchangeable inserts RT 800



cast and AISi alloys

Guhring no. 2747

Standard **Guhring std.**

Tool material **Solid carbide**

Surface

Type

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 289

Interchangeable inserts RT 800



steels up to 1000 N/mm²

Guhring no. 2485

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **F**

Type

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 291

Interchangeable inserts RT 800



steels up to 1000 N/mm²

Guhring no. 1047

Standard **Guhring std.**

Tool material **Solid carbide**

Surface **S**

Type

Cutting direction right-hand

Point geometry

Point angle °

Web thinned $\geq \emptyset$

Standard range page 293

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Tooling system
T800

Standard range, page 299

Basic tool holders

HSK tool holding modules

SK holders

• Guhring no. **4512**
...Code no.

Reductions

4355

Extensions

4549

Straight (VDI) holders


4510

holder size Ø nom.* range

400 (40...42.9)	40.0			
	41.0			
	42.0			
430 (43...45.9)	43.0			
	44.0			
	45.0			
460 (46...48.9)	46.0			
	47.0			
	48.0			
490 (49...51.9)	49.0			
	50.0			
	51.0			
520 (52...55.9)	52.0			
	53.0			
	54.0			
560 (56...59.9)	55.0			
	56.0			
	57.0			
	58.0			
	59.0			

• When ordering please always state Guhring no. and code no!

* for intermediate Ø please consult Guhring application technician.

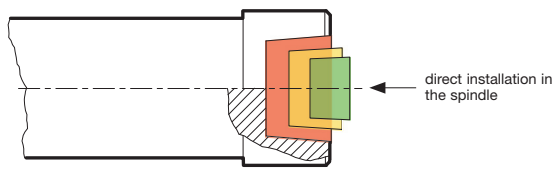

HSK size



 bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



HSK basic holders

15° spiral design

4142

Extensions 3 x D

15° spiral design

4148

Drill heads 1 x D


4150

Cartridges

for mounting the external indexable inserts (x 2 per drill head)

4160

				Ø nom.*	holder	
				range	size	
<p>...63.105 105 → 0.5 x D</p>	<p>...10.150 150</p>	<p>...40.043</p>	<p>...40.046</p>	40.0	400	
				41.0		42.0
				43.0		44.0
<p>...63.180 180 → 2 x D</p>	<p>...10.150 150</p>	<p>...43.046</p>	<p>...40.046</p>	45.0	430	
				44.0		46.0
				47.0		48.0
<p>...63.180 180 → 2 x D</p>	<p>...10.150 150</p>	<p>...46.049</p>	<p>...46.056</p>	49.0	460	
				50.0		51.0
				52.0		53.0
<p>...63.120 120 → 0.5 x D</p>	<p>...12.180 180</p>	<p>...49.052</p>	<p>...46.056</p>	54.0	490	
				55.0		56.0
				57.0		58.0
<p>...63.210 210 → 2 x D</p>	<p>...12.180 180</p>	<p>...52.056</p>	<p>...46.056</p>	59.0	520	
				60.0		61.0
				62.0		63.0
<p>...63.210 210 → 2 x D</p>	<p>...12.180 180</p>	<p>...56.060</p>	<p>...56.065</p>	64.0	560	
				65.0		66.0
				67.0		68.0

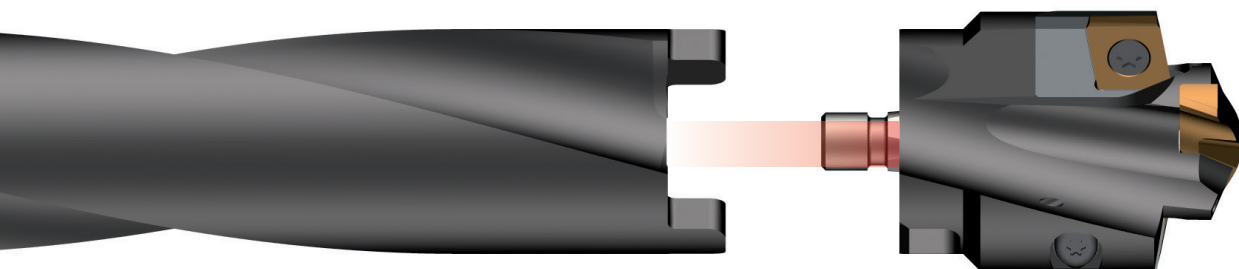



Standard range, page 299

Tooling system
T800

Basic tool holders

HSK tool holding modules

SK holders

• Guhring no. **4512**
...Code no.

Reductions

4355

Extensions

4549


Straight (VDI) holders

4510

holder size	Ø nom.* range	SK holders	Reductions	Extensions
600 (60...64.9)	60.0			
	61.0			
	62.0			
	63.0			
	64.0			
650 (65...69.9)	65.0			
	66.0			
	67.0			
	68.0			
	69.0			
700 (70...74.9)	70.0			
	71.0			
	72.0			
	73.0			
	74.0			
750 (75...79.9)	75.0			
	76.0			
	77.0			
	78.0			
	79.0			
800 (80...84.9)	80.0			
	81.0			
	82.0			
	83.0			
	84.0			
850 (85...89.9)	85.0			
	86.0			
	87.0			
	88.0			
	89.0			
900 (90...94.9)	90.0			
	91.0			
	92.0			
	93.0			
	94.0			
950 (95...100)	95.0			
	96.0			
	97.0			
	98.0			
	99.0			
	100.0			

* When ordering please always state Guhring no. and code no!

* for intermediate Ø please consult Guhring application technician.



direct installation in the spindle

HSK size



○ bright
 ◐ steam tempered
 ◑ nitrided lands
 ● nitrided
 ● golden brown
 ● TiAlN
 ● TiAlN nanoA
 ● AlTiN SuperA



HSK basic holders
straight stepped design,
without chip space

4144

Extensions
3 x D
straight stepped design,
without chip space
































































4149

Drill heads
1 x D

4150

Cartridges
for mounting the external
indexable inserts
(x 2 per drill head)

4160

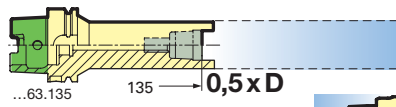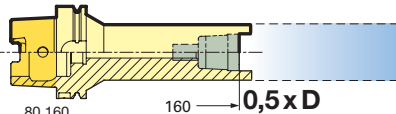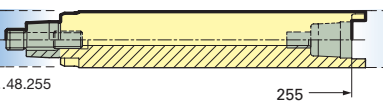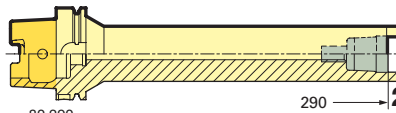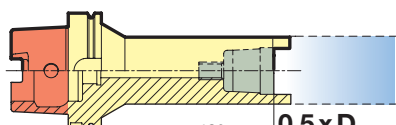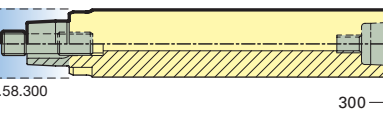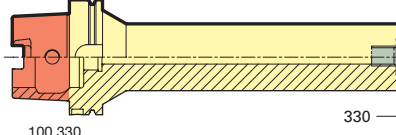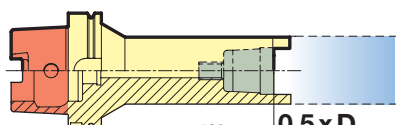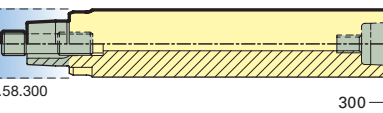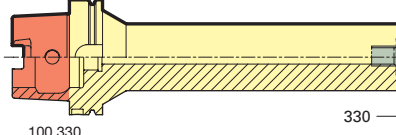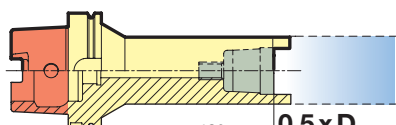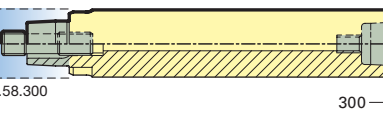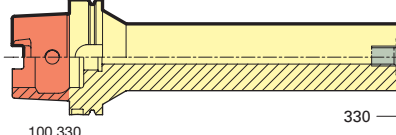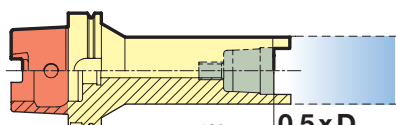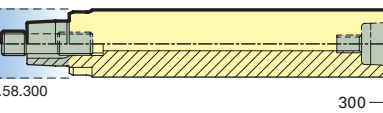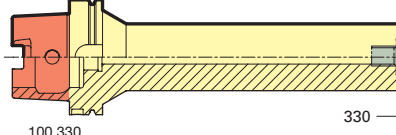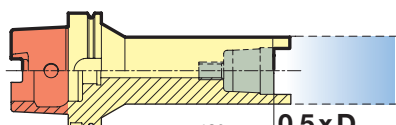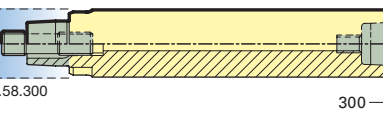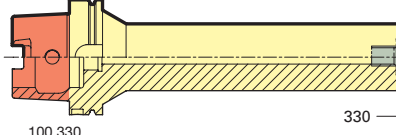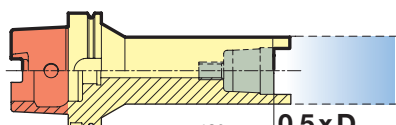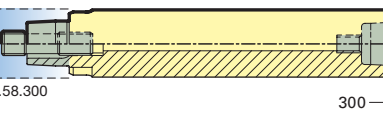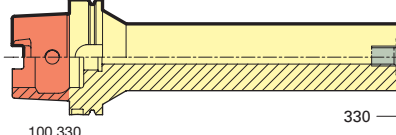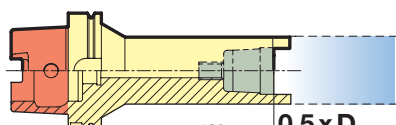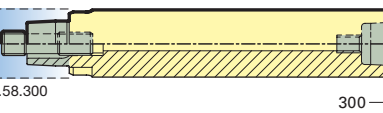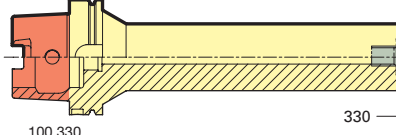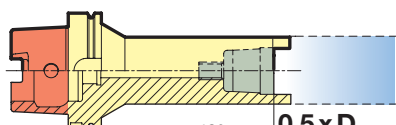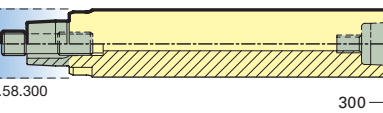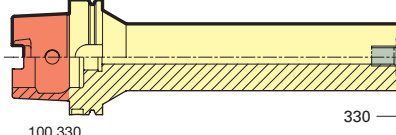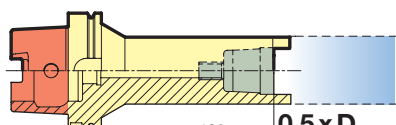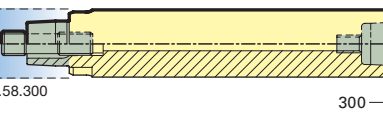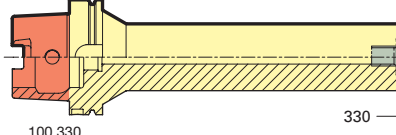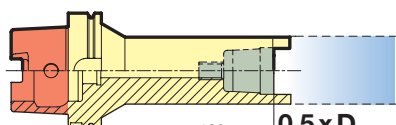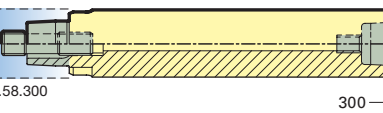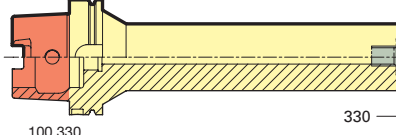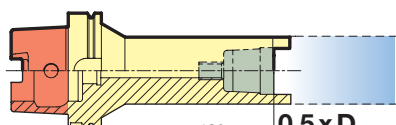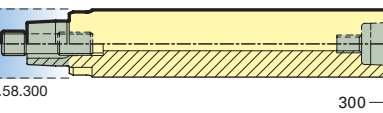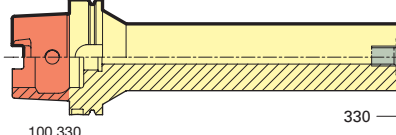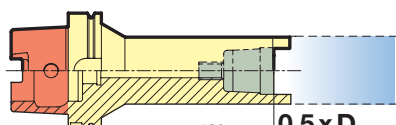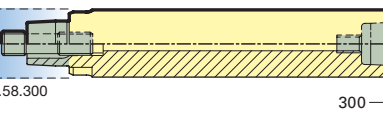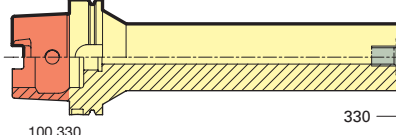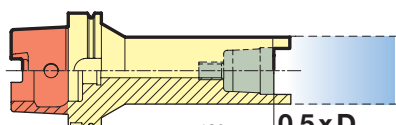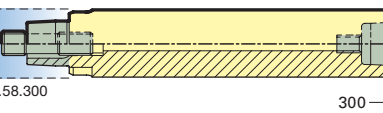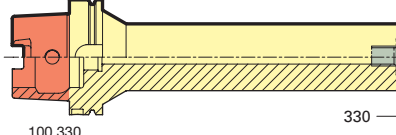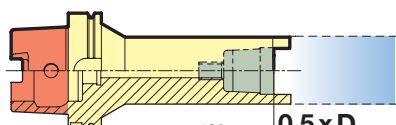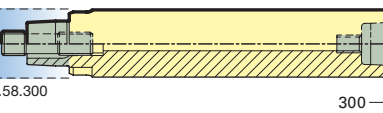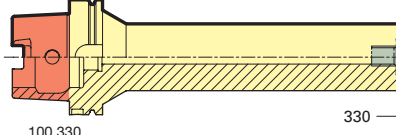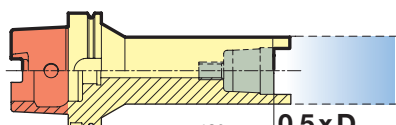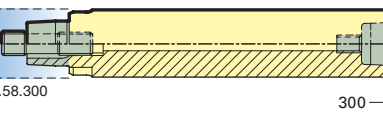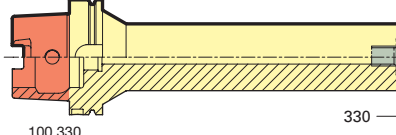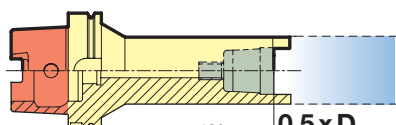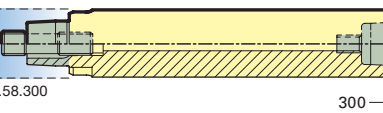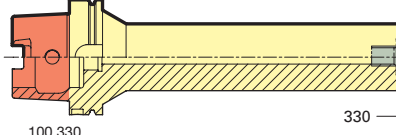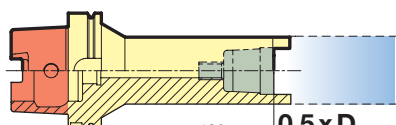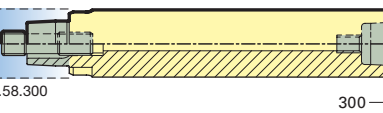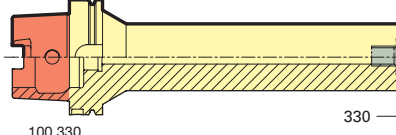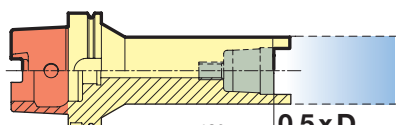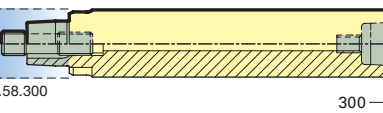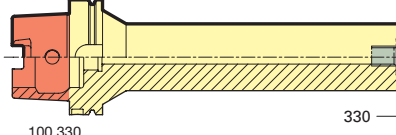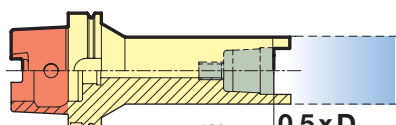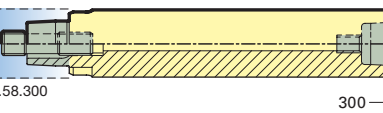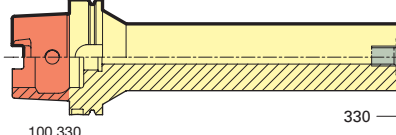
		Ø nom.* range	holder size		
 <p>...63.135 135 → 0,5xD</p>	 <p>...40.210 210 →</p>	60.0	600		
		 <p>...63.240 240 → 2xD</p>		61.0	
 <p>...80.160 160 → 0,5xD</p>	 <p>...48.255 255 →</p>	62.0		650	
		 <p>...80.290 290 → 2xD</p>			63.0
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	64.0			700
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	66.0	750		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	68.0		800	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	70.0			850
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	72.0	900		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	74.0		950	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	76.0			100.0
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	78.0	100.0		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	80.0		100.0	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	82.0			100.0
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	84.0	100.0		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	86.0		100.0	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	88.0			100.0
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	90.0	100.0		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	92.0		100.0	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	94.0			100.0
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	96.0	100.0		
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	98.0		100.0	
		 <p>...100.330 330 → 2xD</p>			
 <p>...100.180 180 → 0,5xD</p>	 <p>...58.300 300 →</p>	99.0			100.0
		 <p>...100.330 330 → 2xD</p>			



Std. range, page 307


T800
Tooling system

Central interchangeable inserts

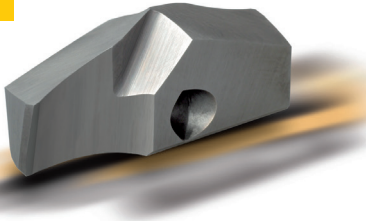


Guhring no.	2747	1047	2485
Tool material	Solid carbide	Solid carbide	Solid carbide
Carbide grade	K	K/P	K/P
Surface finish	○	Ⓢ	Ⓣ
especially suitable for	cast materials aluminium/Al-alloys plastics	universal steel and cast machining	universal steel and cast machining

Indexable inserts Type CCHX (external)



Guhring no.	4179	4180	4181	4182
Design feature	with circular lands	with circular lands	with circular lands	with circular lands
Tool material	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Carbide grade	N15	K10	P25	M35
Surface finish	○	Ⓢ	Ⓢ	Ⓢ
especially suitable for	aluminium/Al-alloys plastics	cast materials	universal steel and cast materials	C-steels, stainless and acid-resistant steels
size				
size				

Indexable inserts Type LTT (internal)




Guhring no.	4170	4171	4172	4173
Design feature	with circular lands	with circular lands	with circular lands	with circular lands
Tool material	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Carbide grade	N10	K10	P25	P40
Surface finish	○	○	Ⓢ	Ⓐ
especially suitable for	non-ferrous metals, aluminium/Al-alloys plastics	cast materials	universal steel and cast materials	C-steels, stainless and acid-resistant steels
size				
size				


○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAIN Ⓢ TiAIN nanoA Ⓐ AITIN SuperA




Cartridges for mounting external indexable inserts (2 cartridges per drilling head)

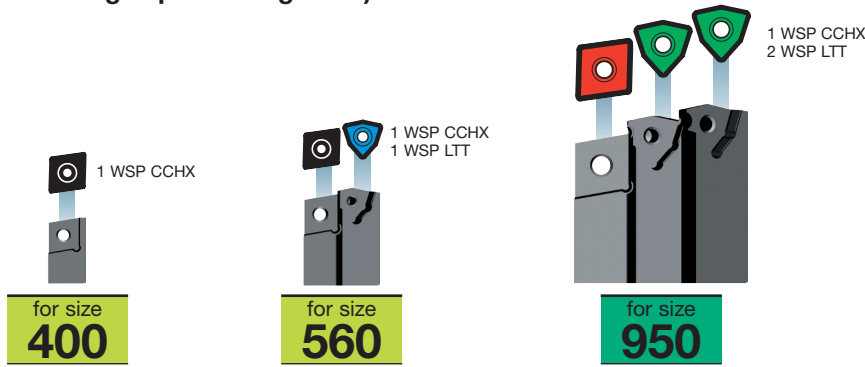

Drill heads (mounting examples)

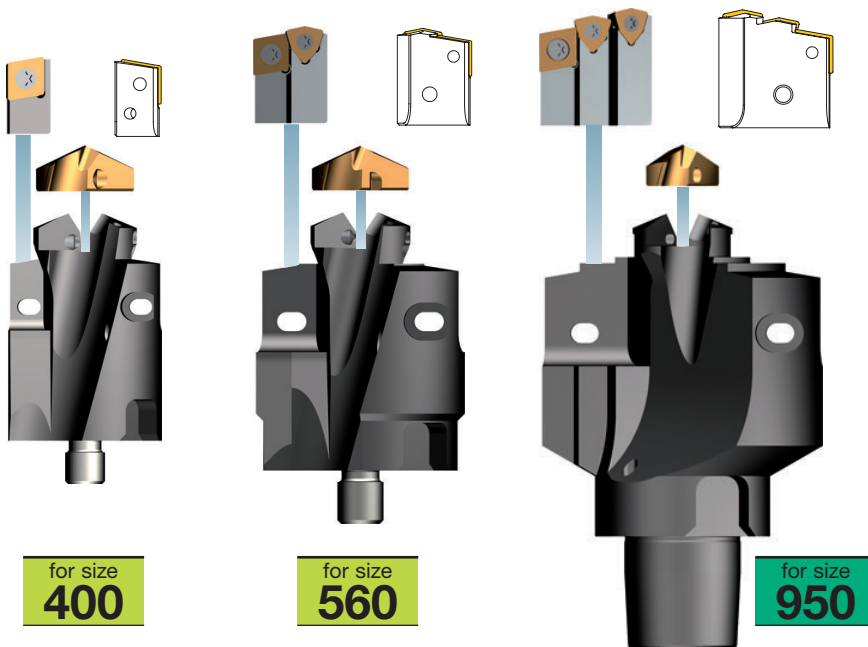

Diameter adjustment with distance pieces on both sides (using holder size 950 as example)

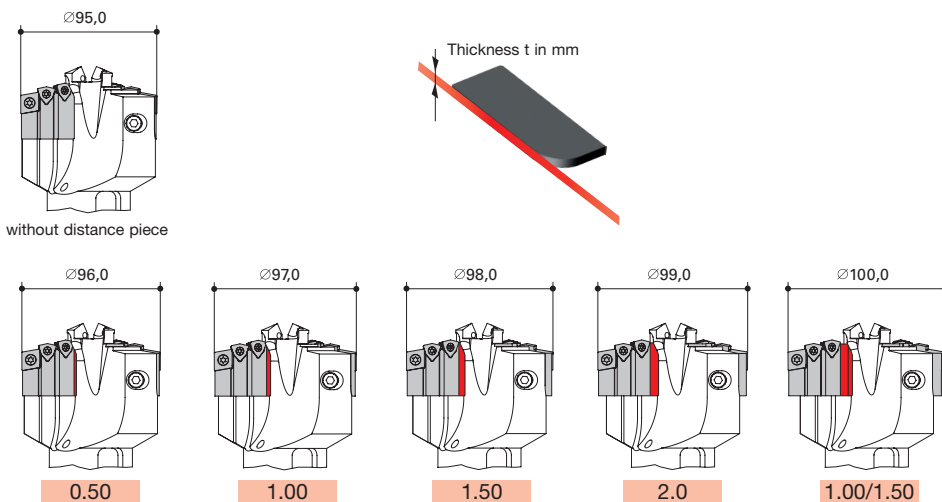

tool size	central interch. insert Ø	cartridge installation
400	27	
430	30	
460	28	
490	31	
520	34	
560	27	
600		
650		
700	32	
750		
800		
850	34	
900	32	
950	34	

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Jobber drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 205

Standard **DIN 338**

Tool material **HSS**

Surface $\frac{>\varnothing}{2,36}$

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 1.00

Standard range page 312

Jobber drills



Standard drill

For hard and brittle materials
brass, magnesium alloys
bronze, phosphor bronze
slate, mica, pertinax

Guhring no. 206

Standard **DIN 338**

Tool material **HSS**

Surface

Type H

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 14.01

Standard range page 312

Jobber drills



Standard drill

soft/long chipping materials
Aluminium/Al-alloys, long-chipping
zinc, refined copper, silumin, electron
soft plastics
wood

Guhring no. 207

Standard **DIN 338**

Tool material **HSS**

Surface

Type W

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq\varnothing$ 14.01

Standard range page 312

Jobber drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 208

Standard **DIN 338**

Tool material **HSS**

Surface $\frac{>\varnothing}{6,00}$

Type N

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 14.01

Standard range page 312

Jobber drills



Standard drill

For hard and brittle materials
brass, magnesium alloys
bronze, phosphor bronze
slate, mica, pertinax

Guhring no. 209

Standard **DIN 338**

Tool material **HSS**

Surface

Type H

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 14.01

Standard range page 312

bright

steam tempered

nitrided lands

nitrided

golden brown


TiAlN


TiAlN nanoA


TiAlN SuperA





Straight shank twist drills

Jobber drills		Gühring no. 210	
 Standard drill	soft/long chipping materials Aluminium/Al-alloys, long-chipping zinc, refined copper, silumin, electron soft plastics wood	Standard	DIN 338
		Tool material	HSS
		Surface	○
		Type	W
		Cutting direction	left-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	14.01
		Standard range page	312

Jobber drills		Gühring no. 240	
 Standard drill With tang to DIN 1809	alloyed/unalloyed steel and cast steel grey cast iron, malleable and spheroidal iron sintered powder metal	Standard	DIN 338
		Tool material	HSS
		Surface	●
		Type	N
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	118
		Web thinned ≥Ø	3.00
		Standard range page	313

Jobber drills		Gühring no. 549	
 Wide flutes Especially for drilling depths over 3xd	Grey cast iron steels up to 1400 N/mm ² Not recommended for: CrNi steels, stainless steels	Standard	DIN 338
		Tool material	HSS
		Surface	⊙ ^{>Ø} _{2,36}
		Type	GT 100
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	0.96
		Standard range page	313

Jobber drills		Gühring no. 550	
 Wide flutes Especially for drilling depths over 3xd	Grey cast iron steels up to 1400 N/mm ² Not recommended for: CrNi steels, stainless steels	Standard	DIN 338
		Tool material	HSS
		Surface	⊙ ^{>Ø} _{2,36}
		Type	GT 100
		Cutting direction	left-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	1.00
		Standard range page	313

Jobber drills		Gühring no. 560	
 Standard drill	alloyed/unalloyed steel and cast steel grey cast iron, malleable and spheroidal iron sintered powder metal	Standard	DIN 338
		Tool material	HSS
		Surface	○
		Type	N
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	118
		Web thinned ≥Ø	2.37
		Standard range page	313



Jobber drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 651

Standard **DIN 338**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 313

Jobber drills



Wide flutes
Especially for drilling depths over 3xd

Grey cast iron
steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 652

Standard **DIN 338**

Tool material **HSS**

Surface **S**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 313

Jobber drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 664

Standard **DIN 338**

Tool material **HSS**

Surface **S**

Type N

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 2.37

Standard range page 313

Jobber drills



Wide flutes
Especially for drilling depths over 3xd

Grey cast iron
steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 665

Standard **DIN 338**

Tool material **HSS**

Surface **S**

Type GT 100

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.30

Standard range page 313

Jobber drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 2456

Standard **DIN 338**

Tool material **HSS**

Surface **F**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 313



Jobber drills



Wide flutes
Especially for drilling depths over 3xd

Grey cast iron steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 2457

Standard **DIN 338**

Tool material **HSS**

Surface **F**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 1.00

Standard range page 313

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

alloyed and high alloyed steels castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 305

Standard **DIN 338**

Tool material **HSCO**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.00

Standard range page 350

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

alloyed and high alloyed steels castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 308

Standard **DIN 338**

Tool material **HSCO**

Surface

Type N

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 2.37

Standard range page 350

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys stainless/acid-/heat resistant austenitic steels for high tensile strength and short chipping steels over appr. 900 N/mm²
special alloys Hastelloy, Inconel, Nimonic

Guhring no. 605

Standard **DIN 338**

Tool material **HSCO**

Surface

Type Ti

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 0.96

Standard range page 350

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys stainless/acid-/heat resistant austenitic steels for high tensile strength and short chipping steels over appr. 900 N/mm²
special alloys Hastelloy, Inconel, Nimonic

Guhring no. 608

Standard **DIN 338**

Tool material **HSCO**

Surface

Type Ti

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 0.96

Standard range page 350

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Straight shank twist drills

Straight shank twist drills

Jobber drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed and high alloyed steels
castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 622

Standard **DIN 338**

Tool material **HSCO**

Surface 

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 0.96

Standard range page 350

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys
stainless/acid-/heat resistant austenitic steels
for high tensile strength and short chipping
steels over appr. 900 N/mm²
special alloys Hastelloy, Inconel, Nimonic

Guhring no. 657

Standard **DIN 338**

Tool material **HSCO**

Surface 

Type Ti

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 0.96

Standard range page 350

Jobber drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed and high alloyed steels
castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 658

Standard **DIN 338**

Tool material **HSCO**

Surface 

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 1.00

Standard range page 351

Jobber drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed and high alloyed steels
castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 1221

Standard **DIN 338**

Tool material **HSCO**

Surface 

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.10

Standard range page 351

Jobber drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed and high alloyed steels
castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 1223

Standard **DIN 338**

Tool material **HSCO**

Surface 

Type GT 100

Cutting direction right-hand


Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 3.00

Standard range page 351

 bright

 steam tempered

 nitrided lands

 nitrided

 golden brown

 TiAlN

 TiAlN nanoA

 TiAlN SuperA



Jobber drills



Co-alloyed high speed steel
Special geometry
Increased wear resistance

stainless/acid-/heat resistant austenitic steels (V2A and V4A)

Guhring no. 1260

Standard **DIN 338**

Tool material **HSCO**

Surface

Type VA

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$

Standard range page 351

Jobber drills



Universal application
Co-alloyed high speed steel
Increased wear resistance

steels up to 1000 N/mm²
AISI-alloys

Guhring no. 2047

Standard **DIN 338**

Tool material **HSCO**

Surface

Type P2000

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$

Standard range page 351

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys
stainless/acid-/heat resistant austenitic steels for high tensile strength and short chipping steels over appr. 900 N/mm²
special alloys Hastelloy, Inconel, Nimonic

Guhring no. 2458

Standard **DIN 338**

Tool material **HSCO**

Surface

Type Ti

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 351

Jobber drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed and high alloyed steels castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 2459

Standard **DIN 338**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 351

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

alloyed and high alloyed steels castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 2997

Standard **DIN 338**

Tool material **HSCO**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 351

TiCN

Carbo

Cristall

FIRE/nanoFIRE

AlCrN

TiN

TiN+

MolyGlide

Signum



Straight shank twist drills

Straight shank twist drills

Jobber drills



High alloyed CoMo steel
Especially high wear resistance

medium/high tensile CrNi-based alloys
Hastelloy, Inconel, Nimonic
stainless/acid/heat resistant steels
wear-resistant sheet metals
steels/bronzes up to 1400 N/mm²

Guhring no. 1146

Standard **DIN 338**

Tool material **M42**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 135

Web thinned ≥Ø 0.96

Standard range page 351

Jobber drills



Special drill
Carbide tipped
Carbide tipped

abrasive materials
heat treated/hardened steel
hard cast iron, Mn steel, hard bronzes

Guhring no. 710

Standard **Guhring std.**

Tool material **Carbide**

Surface

Type Duro 150

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø 2.70

Standard range page 376

Jobber drills



Standard drill

cast iron, grey cast iron, chilled cast iron
Mn hard steels, bronzes
light and non-ferrous metals
abrasive materials (AISI alloys)
fiber reinforced plastics
Duroplastics that cause wear on lands and cutting edges

Guhring no. 732

Standard **Guhring std.**

Tool material **Solid carbide**

Surface

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø 2.00

Standard range page 376

Jobber drills



Standard drill
nanoFIRE coating

cast iron, grey cast iron, chilled cast iron
Mn hard steels, bronzes
light and non-ferrous metals
abrasive materials (AISI alloys)
fiber reinforced plastics
Duroplastics that cause wear on lands and cutting edges

Guhring no. 2464

Standard **Guhring std.**

Tool material **Solid carbide**

Surface

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø 2.00

Standard range page 376

Stub drills



Rigid twist drill
For use in automatic/capstan lathes
Also for hand drilling machines

thin materials e.g. car bodies

Guhring no. 223

Standard **DIN 1897**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.00

Standard range page 382

bright

steam tempered

nitrided lands

nitrided



golden brown



TiAlN



TiAlN nanoA



TiAlN SuperA





Stub drills		Guhring no. 224	
	Rigid twist drill	For hard and brittle materials brass, magnesium alloys bronze, phosphor bronze electron (thin sections) slate, mico, pertinax	Standard DIN 1897
			Tool material HSS
		Surface 	
		Type H	
		Cutting direction right-hand	
		Point geometry Relieved cone	
		Point angle ° 118	
		Web thinned $\geq \emptyset$ 14.01	
		Standard range page 382	

Stub drills		Guhring no. 225	
	Rigid twist drill	soft/long chipping materials Aluminium/Al-alloys, long-chipping soft plastics wood	Standard DIN 1897
			Tool material HSS
		Surface 	
		Type W	
		Cutting direction right-hand	
		Point geometry Relieved cone	
		Point angle ° 130	
		Web thinned $\geq \emptyset$ 2.37	
		Standard range page 382	

Stub drills		Guhring no. 226	
	Rigid twist drill For use in automatic/capstan lathes	thin materials e.g. car bodies	Standard DIN 1897
			Tool material HSS
		Surface 	
		Type N	
		Cutting direction left-hand	
		Point geometry Relieved cone	
		Point angle ° 118	
		Web thinned $\geq \emptyset$ 14.01	
		Standard range page 382	

Stub drills		Guhring no. 227	
	Rigid twist drill	For hard and brittle materials brass, magnesium alloys bronze, phosphor bronze electron (thin sections) slate, mico, pertinax	Standard DIN 1897
			Tool material HSS
		Surface 	
		Type H	
		Cutting direction left-hand	
		Point geometry Relieved cone	
		Point angle ° 118	
		Web thinned $\geq \emptyset$ 14.01	
		Standard range page 382	

Stub drills		Guhring no. 228	
	Rigid twist drill	soft/long chipping materials Aluminium/Al-alloys, long-chipping soft plastics wood	Standard DIN 1897
			Tool material HSS
		Surface 	
		Type W	
		Cutting direction left-hand	
		Point geometry Relieved cone	
		Point angle ° 130	
		Web thinned $\geq \emptyset$ 2.37	
		Standard range page 382	



Stub drills



Special geometry
For higher tensile steels

Free-cutting steels
acid-/stainl. resist. steels
case hardening/heat treatable steels up to 800 N/mm²
short/medium chip length Al/Cu alloys

Guhring no. 552

Standard **DIN 1897**

Tool material **HSS**

Surface $\begin{matrix} <0 \\ 2,36 \end{matrix}$ $\begin{matrix} >0 \\ 16,0 \end{matrix}$

Type GT 80

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 382

Stub drills



Special geometry
For higher tensile steels

Free-cutting steels
acid-/stainl. resist. steels
case hardening/heat treatable steels up to 800 N/mm²
short/medium chip length Al/Cu alloys

Guhring no. 553

Standard **DIN 1897**

Tool material **HSS**

Surface $\begin{matrix} <0 \\ 2,36 \end{matrix}$ $\begin{matrix} >0 \\ 16,0 \end{matrix}$

Type GT 80

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 382

Stub drills



Rigid twist drill
For use in automatic/capstan lathes
Also for hand drilling machines

thin materials e.g. car bodies

Guhring no. 653

Standard **DIN 1897**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 383

Stub drills



Rigid twist drill
For use in automatic/capstan lathes

thin materials e.g. car bodies

Guhring no. 672

Standard **DIN 1897**

Tool material **HSS**

Surface **S**

Type N

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 2.37

Standard range page 383

Stub drills



Rigid twist drill
For use in automatic/capstan lathes
Also for hand drilling machines

thin materials e.g. car bodies

Guhring no. 2460

Standard **DIN 1897**

Tool material **HSS**

Surface **F**

Type N

Cutting direction right-hand



Point geometry Relieved cone



Point angle ° 118



Web thinned $\geq \emptyset$ 1.00



Standard range page 383





Stub drills		Gühring no. 329		
	Co-alloyed high speed steel Increased wear resistance	acid resist./stainless steels Spring steels Austenitic stainless steels special alloys Hastelloy, Inconel, Nimonic	Standard	DIN 1897
			Tool material	HSCO
			Surface	 $\frac{>\varnothing}{2,36}$
			Type	GV 120
			Cutting direction	right-hand
			Point geometry	Relieved cone
			Point angle °	130
			Web thinned $\geq\varnothing$	1.00
			Standard range page	383

Stub drills		Gühring no. 330		
	Co-alloyed high speed steel Increased wear resistance	acid resist./stainless steels Spring steels Austenitic stainless steels special alloys Hastelloy, Inconel, Nimonic	Standard	DIN 1897
			Tool material	HSCO
			Surface	 $\frac{>\varnothing}{6,00}$
			Type	GV 120
			Cutting direction	left-hand
			Point geometry	Relieved cone
			Point angle °	130
			Web thinned $\geq\varnothing$	2.37
			Standard range page	383

Stub drills		Gühring no. 659		
	Co-alloyed high speed steel Increased wear resistance	acid resist./stainless steels Spring steels Austenitic stainless steels special alloys Hastelloy, Inconel, Nimonic	Standard	DIN 1897
			Tool material	HSCO
			Surface	
			Type	GV 120
			Cutting direction	right-hand
			Point geometry	Relieved cone
			Point angle °	130
			Web thinned $\geq\varnothing$	1.00
			Standard range page	383

Stub drills		Gühring no. 1228		
	Co-alloyed high speed steel Special geometry Increased wear resistance	For higher tensile steels long chipping materials up to 1000 N/mm ² Al- and Cu alloys soft bronzes electrolytic copper ductile brass	Standard	DIN 1897
			Tool material	HSCO
			Surface	
			Type	GT 80
			Cutting direction	right-hand
			Point geometry	Relieved cone
			Point angle °	130
			Web thinned $\geq\varnothing$	1.00
			Standard range page	383

Stub drills		Gühring no. 1261		
	Co-alloyed high speed steel Special geometry Increased wear resistance	stainless/acid-/heat resistant austenitic steels (V2A and V4A)	Standard	DIN 1897
			Tool material	HSCO
			Surface	
			Type	VA
			Cutting direction	right-hand
			Point geometry	Relieved cone
			Point angle °	130
			Web thinned $\geq\varnothing$	
			Standard range page	383



Straight shank twist drills

Straight shank twist drills

Stub drills



Universal application
Co-alloyed high speed steel
Increased wear resistance
For professional use
For hand drilling machines

long chipping steels up to 1000 N/mm²
cast and AlSi alloys

Guhring no. 2048

Standard **DIN 1897**

Tool material **HSCO**

Surface **M**

Type P2000

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø

Standard range page 383

Stub drills



Co-alloyed high speed steel
Increased wear resistance

acid resist./stainless steels
Spring steels
Austenitic stainless steels
special alloys Hastelloy, Inconel, Nimonic

Guhring no. 2461

Standard **DIN 1897**

Tool material **HSCO**

Surface **F**

Type GV 120

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 1.00

Standard range page 383

Stub drills



Co-alloyed high speed steel
Special geometry
Increased wear resistance

long chipping materials up to 1000 N/mm²
Al- and Cu alloys
soft bronzes
electrolytic copper
ductile brass

Guhring no. 2498

Standard **DIN 1897**

Tool material **HSCO**

Surface **F**

Type GT 80

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 1.00

Standard range page 383

Stub drills



High alloyed CoMo steel
Especially high wear resistance

medium/high tensile CrNi-based alloys
Hastelloy, Inconel, Nimonic
stainless/acid/heat resistant steels
wear-resistant sheet metals
steels/bronzes up to 1400 N/mm²

Guhring no. 1259

Standard **DIN 1897**

Tool material **M42**

Surface **○**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 135

Web thinned ≥Ø 1.00

Standard range page 414

Stub drills



PM Co-alloyed high speed steel
Especially high rigidity
Especially high wear resistance

high alloyed steels
Heat treatable and case hardened steels
Cast iron, brass, bronze

Guhring no. 515

Standard **DIN 1897**

Tool material **HSS-E-PM**

Surface **F**

Type GT 500

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 1.00

Standard range page 414

○ bright

◐ steam tempered

◑ nitrided lands

● nitrided


● golden brown


Ⓐ TiAlN


Ⓐ TiAlN nanoA


Ⓐ TiAlN SuperA




Stub drills		Gühring no. 730	
 Rigid twist drill For use in automatic/capstan lathes	cast iron, grey cast iron, chilled cast iron Mn hard steels, bronzes light and non-ferrous metals abrasive materials (AlSi alloys) fiber reinforced plastics Duroplastics that cause wear on lands and cutting edges	Standard	DIN 6539
		Tool material	Solid carbide
		Surface	○
		Type	N
		Cutting direction	right-hand
		Point geometry	Facet point grind
		Point angle °	118
		Web thinned ≥Ø	2.10
		Standard range page	414

Stub drills		Gühring no. 2463	
 Rigid twist drill For use in automatic/capstan lathes nanoFIRE coating	cast iron, grey cast iron, chilled cast iron Mn hard steels, bronzes light and non-ferrous metals abrasive materials (AlSi alloys) fiber reinforced plastics Duroplastics that cause wear on lands and cutting edges	Standard	DIN 6539
		Tool material	Solid carbide
		Surface	F
		Type	N
		Cutting direction	right-hand
		Point geometry	Facet point grind
		Point angle °	118
		Web thinned ≥Ø	2.00
		Standard range page	414

Stub drills		Gühring no. 702	
 Special drill	glass fibres reinforced plastics Duroplastics that cause wear on lands and cutting edges	Standard	Gühring std.
		Tool material	Solid carbide
		Surface	○
		Type	N
		Cutting direction	right-hand
		Point geometry	Facet point grind
		Point angle °	130
		Web thinned ≥Ø	
		Standard range page	420

Twist drills with oversize straight shank		Gühring no. 512	
 Co-alloyed high speed steel Low feed force required Low torque required Increased wear resistance Universal application	alloyed/unalloyed steels over 800 N/mm ² cold/hot work steels antifriction bearing steels non-ferrous metals cast materials plastics	Standard	Gühring std.
		Tool material	HSCO
		Surface	S
		Type	GU 500
		Cutting direction	right-hand
		Point geometry	Facet point grind
		Point angle °	118
		Web thinned ≥Ø	2.00
		Standard range page	426

Twist drills with oversize straight shank		Gühring no. 513	
 PM Co-alloyed high speed steel Especially high rigidity Especially high wear resistance	high alloyed steels Heat treatable and case hardened steels Cast iron, brass, bronze	Standard	Gühring std.
		Tool material	HSS-E-PM
		Surface	F
		Type	GT 500
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	2.00
		Standard range page	430



Straight shank twist drills

Straight shank twist drills

Twist drills with oversize straight shank



Co-alloyed high speed steel
Low feed force required
Low torque required
Increased wear resistance
Universal application

alloyed/unalloyed steels over 800 N/mm²
cold/hot work steels
antifriction bearing steels
non-ferrous metals
cast materials
plastics

Guhring no. 511

Standard	Guhring std.
Tool material	HSCO
Surface	S
Type	GU 500
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	118
Web thinned ≥Ø	2.00
Standard range page	432

Twist drills with oversize straight shank



Especially high rigidity
Optimal chip fracture and short chips

hardened steels up to 62 HRC

Guhring no. 1946

Standard	DIN 6537 K
Tool material	Solid carbide
Surface	A
Type	H
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	120
Web thinned ≥Ø	3.00
Standard range page	436

Jobber drills with 12.7 mm dia. shank



With solid shank

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal
German silver

Guhring no. 268

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	14.01
Standard range page	437

Stub drills with 16.0 mm dia. shank



Co-alloyed high speed steel
Increased wear resistance
With solid shank
blank, centering on both sides
without point grinding
For corrections, e.g. on diameter, step grind or
form grind

difficult to machine materials
acid resist./stainless steels
Spring steels
Austenitic stainless steels

Guhring no. 128

Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	without point grind
Point angle °	120
Web thinned ≥Ø	
Standard range page	438

Stub drills with 25.4 mm dia. shank



Co-alloyed high speed steel
Increased wear resistance
With solid shank
blank, centering on both sides
without point grinding
For corrections, e.g. on diameter, step grind or
form grind

difficult to machine materials
acid resist./stainless steels
Spring steels
Austenitic stainless steels

Guhring no. 129

Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	without point grind
Point angle °	120
Web thinned ≥Ø	
Standard range page	439

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAN ● TiAN nanoA ● TiAN SuperA



Stub drills with 25.4 mm dia. shank



Co-alloyed high speed steel
Increased wear resistance
With solid shank blank, centering on both sides without point grinding
For corrections, e.g. on diameter, step grind or form grind

difficult to machine materials
acid resist./stainless steels
Spring steels
Austenitic stainless steels

Guhring no. 136

Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	N
Cutting direction	left-hand
Point geometry	without point grind
Point angle °	120
Web thinned ≥Ø	
Standard range page	439

90° NC-spotting drills



Only suitable for spotting

Guhring no. 557

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	90
Web thinned ≥Ø	
Standard range page	440

90° NC-spotting drills



Only suitable for spotting

Guhring no. 568

Standard	Guhring std.
Tool material	HSS
Surface	S
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	90
Web thinned ≥Ø	
Standard range page	440

90° NC-spotting drills



Special drill
Only suitable for spotting

high tensile steels
cast iron, grey cast iron, chilled cast iron
austenitic manganese steel, CrNi steels
bronzes
light and non-ferrous metals

Guhring no. 723

Standard	Guhring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	90
Web thinned ≥Ø	
Standard range page	440

90° NC-spotting drills



Only suitable for spotting

Guhring no. 559

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	90
Web thinned ≥Ø	
Standard range page	441

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Straight shank twist drills

Straight shank twist drills

120° NC-spotting drills



Only suitable for spotting

Guhring no. 556

Standard **Guhring std.**

Tool material **HSS**

Surface ○

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 120

Web thinned ≥Ø

Standard range page 442

120° NC-spotting drills



Only suitable for spotting

Guhring no. 567

Standard **Guhring std.**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 120

Web thinned ≥Ø

Standard range page 442

120° NC-spotting drills



Special drill
Only suitable for spotting

high tensile steels
cast iron, grey cast iron, chilled cast iron
austenitic manganese steel, CrNi steels
bronzes
light and non-ferrous metals

Guhring no. 724

Standard **Guhring std.**

Tool material **Solid carbide**

Surface ○

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 120

Web thinned ≥Ø

Standard range page 442

142° NC-spotting drills



Special drill
Only suitable for spotting

high tensile steels
cast iron, grey cast iron, chilled cast iron
austenitic manganese steel, CrNi steels
bronzes
light and non-ferrous metals

Guhring no. 546

Standard **Guhring std.**

Tool material **Solid carbide**

Surface ○

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 142

Web thinned ≥Ø

Standard range page 443

Straight shank drills double-ended



For application on both sides
For hand drilling mach. in car body ind.

thin materials e.g. car bodies

Guhring no. 554

Standard **Guhring std.**

Tool material **HSS**

Surface ○ $\frac{>\varnothing}{2,36}$

Type DK 77

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.45

Standard range page 444

○ bright

○ steam tempered

● nitrided lands

● nitrided

● golden brown

Ⓐ TiAlN

Ⓐ TiAlN nanoA

Ⓐ TiAlN SuperA



Straight shank twist drills

Micro-precision drills without oil feed



< Ø 0.15 mm
Co-alloyed high speed steel
With re-inforced shank

high alloyed steels

Gühring no. 301

Standard **DIN 1899**
Tool material **HSS-E-PM**

Surface ○

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø

Standard range page 446

Micro-precision drills without oil feed



< Ø 0.15 mm
Co-alloyed high speed steel
With re-inforced shank

high alloyed steels

Gühring no. 303

Standard **DIN 1899**
Tool material **HSS-E-PM**

Surface ○

Type N

Cutting direction left-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø

Standard range page 446

Micro-precision drills without oil feed



With re-inforced shank
Increased wear resistance

high alloyed steels

Gühring no. 660

Standard **DIN 1899**
Tool material **HSS-E-PM**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned ≥Ø

Standard range page 446

Micro-precision drills without oil feed



glass fibres reinforced plastics
materials that cause wear
on cutting lips and lands

Gühring no. 701

Standard **Gühring std.**
Tool material **Solid carbide**

Surface ○

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 130

Web thinned ≥Ø 0.80

Standard range page 446

Micro-precision drills without oil feed



Universal application

Gühring no. 3899

Standard **Gühring std.**
Tool material **Solid carbide**

Surface **A**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 0.80

Standard range page 453

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Straight shank twist drills

Straight shank twist drills

Micro-precision drills without oil feed



edge preparation
Optimal chip fracture

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6400

Standard Guhring std.

Tool material Solid carbide

Surface **A**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 0.80

Standard range page 455

Micro-precision drills without oil feed



edge preparation
Optimal chip fracture

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6401

Standard Guhring std.

Tool material Solid carbide

Surface **A**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 140

Web thinned ≥Ø 0.80

Standard range page 457

Micro-precision drills with oil feed



edge preparation
Optimal chip fracture

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6408

Standard Guhring std.

Tool material Solid carbide

Surface **A**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 135

Web thinned ≥Ø 1.40

Standard range page 459

Micro-precision drills with oil feed



edge preparation
Optimal chip fracture

structural and case hardened steels
Free-cutting steels, heat-treatable steels
alloyed steels up to 1200 N/mm²
stainless steels, cast iron

Guhring no. 6412

Standard Guhring std.

Tool material Solid carbide

Surface **A**

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 135

Web thinned ≥Ø 1.40

Standard range page 461

Oil feed drills



Co-alloyed high speed steel

long chipping materials up to 1000 N/mm²
Stainless steels
cast materials
non-ferrous metals

Guhring no. 1131

Standard Guhring std.

Tool material HSCO

Surface ○

Type GT 80 IK

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 5.00

Standard range page 462

○ bright

◐ steam tempered

◑ nitrided lands

● nitrided

● golden brown

A TiAN

a TiAN nanoA

A TiAN SuperA



Oil feed drills



Co-alloyed high speed steel
Increased wear resistance

long chipping materials up to 1000 N/mm²
Stainless steels
cast materials
non-ferrous metals

Gühring no. 1132

Standard **Gühring std.**

Tool material **HSCO**

Surface **S**

Type GT 80 IK

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 5.00

Standard range page 462

Oil feed drills



Oil feed drills
For drilling through drill bushes
Especially for drilling depths over 5xD

laminated sheet metal
steel and cast steel, grey cast iron
austenitic steels up to 800 N/mm²

Gühring no. 390

Standard **Gühring std.**

Tool material **HSS**

Surface **○**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 3.00

Standard range page 464

Bushing length twist drills



Special geometry
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and
graphite

Gühring no. 211

Standard **DIN 339**

Tool material **HSS**

Surface **○** $\frac{>\varnothing}{2,36}$

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.00

Standard range page 465

Bushing length twist drills



Special geometry
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and
graphite

Gühring no. 561

Standard **DIN 339**

Tool material **HSS**

Surface **○**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 2.40

Standard range page 465

Bushing length twist drills



Special geometry
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and
graphite

Gühring no. 666

Standard **DIN 339**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.00

Standard range page 465

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Bushing length twist drills



Co-alloyed high speed steel
Special geometry
Increased wear resistance
For drilling through drill bushes

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 311

Standard **DIN 339**

Tool material **HSC0**

Surface $\frac{>\varnothing}{2,36}$

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 1.10

Standard range page 465

Long series twist drills



With tang

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 204

Standard **DIN 340**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 2.95

Standard range page 472

Long series twist drills



Standard drill
Especially for deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 217

Standard **DIN 340**

Tool material **HSS**

Surface $\frac{>\varnothing}{2,36}$

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 1.00

Standard range page 472

Long series twist drills



Standard drill
Especially for deep holes

hard, crumbly materials
brass, magnesium alloys
bronze, phosphor bronze
thin zamak und electron
slate, mico, pertinax
with special point grind:
insulating materials, ebonit, bakelite
galalithe, celluloid, synthetic resins, horn compounds
eternit, plexiglass

Guhring no. 218

Standard **DIN 340**

Tool material **HSS**

Surface

Type H

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq\varnothing$ 14.01

Standard range page 472

Long series twist drills



Standard drill
Especially for deep holes

soft/long chipping materials
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, soft plastics, wood

Guhring no. 219

Standard **DIN 340**

Tool material **HSS**

Surface

Type W

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq\varnothing$ 14.01

Standard range page 472

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Long series twist drills



Standard drill
Especially for deep holes
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Gühring no. 220

Standard **DIN 340**

Tool material **HSS**

Surface  $\frac{>\varnothing}{6,00}$

Type N

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \varnothing$ 14.01

Standard range page 472

Long series twist drills



Standard drill
Especially for deep holes

hard, crumbly materials
brass, magnesium alloys
bronze, phosphor bronze
thin zamak und electron
slate, mico, pertinax
with special point grind:
insulating materials, ebonit, bakelite
galalithe, celluloid, synthetic resins, horn com-
pounds
eternit, plexiglass

Gühring no. 221

Standard **DIN 340**

Tool material **HSS**

Surface 

Type H

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \varnothing$ 14.01

Standard range page 472

Long series twist drills



Especially large flute

soft/long chipping materials
up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Gühring no. 501

Standard **DIN 340**

Tool material **HSS**

Surface 

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 2.37

Standard range page 472

Long series twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 506

Standard **DIN 340**

Tool material **HSS**

Surface  $\frac{>\varnothing}{2,36}$

Type GT 100

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 1.40

Standard range page 473

Long series twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 535

Standard **DIN 340**

Tool material **HSS**

Surface  $\frac{>\varnothing}{2,36}$

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 1.00

Standard range page 473

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Long series twist drills



Standard drill
Especially for deep holes
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 667

Standard **DIN 340**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 0.96

Standard range page 473

Long series twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 668

Standard **DIN 340**

Tool material **HSS**

Surface **S**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 473

Long series twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 2462

Standard **DIN 340**

Tool material **HSS**

Surface **F**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 473

Long series twist drills



Co-alloyed high speed steel
Increased wear resistance

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 317

Standard **DIN 340**

Tool material **HSCO**

Surface  $\frac{>\emptyset}{2,36}$

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 473

Long series twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For unsatisfactory chip evacuation

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 336

Standard **DIN 340**

Tool material **HSCO**

Surface  $\frac{>\emptyset}{2,36}$

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 1.00

Standard range page 473

 bright

 steam tempered

 nitrided lands

 nitrided

 golden brown

 TiAlN

 TiAlN nanoA

 TiAlN SuperA



Long series twist drills



Co-alloyed high speed steel
Wide flutes
Especially high wear resistance
For unsatisfactory chip evacuation

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 396

Standard	DIN 340
Tool material	HSCO
Surface	F
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	1.00
Standard range page	473

Long series twist drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys
stainless/acid-/heat resistant austenitic steels for high tensile strength and short chipping steels over appr. 900 N/mm²
antifriction bearing steels
Hastelloy, Inconel, Nimonic

Guhring no. 617

Standard	DIN 340
Tool material	HSCO
Surface	○
Type	Ti
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	1.00
Standard range page	473

Long series twist drills



Co-alloyed high speed steel
Increased wear resistance

Titanium and Titanium alloys
stainless/acid-/heat resistant austenitic steels for high tensile strength and short chipping steels over appr. 900 N/mm²
antifriction bearing steels
Hastelloy, Inconel, Nimonic

Guhring no. 669

Standard	DIN 340
Tool material	HSCO
Surface	S
Type	Ti
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	1.00
Standard range page	473

Long series twist drills



glass fibres reinforced plastics
Duroplastics that cause wear on lands and cutting edges

Guhring no. 706

Standard	Guhring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	130
Web thinned ≥Ø	
Standard range page	496

Extra length twist drills, series 1



For extremely deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 235

Standard	DIN 1869
Tool material	HSS
Surface	○ ^{2,36}
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	2.37
Standard range page	497

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Extra length twist drills, series 1



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 502

Standard **DIN 1869**

Tool material **HSS**

Surface $\geq \varnothing$ 2,36

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 1.95

Standard range page 497

Extra length twist drills, series 1



For extremely deep holes

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Guhring no. 524

Standard **DIN 1869**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 2.37

Standard range page 497

Extra length twist drills, series 1



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 670

Standard **DIN 1869**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 1.98

Standard range page 497

Extra length twist drills, series 1



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For extremely deep holes
For unsatisfactory chip evacuation

high tensile steels and cast steels
grey cast iron, malleable and spheroidal iron

Guhring no. 618

Standard **DIN 1869**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \varnothing$ 2.70

Standard range page 497

Extra length twist drills, series 2



For extremely deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and
graphite

Guhring no. 236

Standard **DIN 1869**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \varnothing$ 2.70

Standard range page 502



Extra length twist drills, series 2



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 503

Standard **DIN 1869**

Tool material **HSS**

Surface >Ø 2,36

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.00

Standard range page 502

Extra length twist drills, series 2



For extremely deep holes

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Gühring no. 528

Standard **DIN 1869**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.80

Standard range page 502

Extra length twist drills, series 2



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 671

Standard **DIN 1869**

Tool material **HSS**

Surface S

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.30

Standard range page 502

Extra length twist drills, series 2



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For extremely deep holes
For unsatisfactory chip evacuation

high tensile steels and cast steels
grey cast iron, malleable and spheroidal iron

Gühring no. 619

Standard **DIN 1869**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 3.00

Standard range page 502

Extra length twist drills, series 3



For extremely deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Gühring no. 237

Standard **DIN 1869**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.50

Standard range page 505

TiCN

Carbo

Cristall

FIRE/nanoFIRE

AlCrN

TiN

TiN+

MolyGlide

Signum



Extra length twist drills, series 3



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 504

Standard **DIN 1869**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.50

Standard range page 505

Extra length twist drills, series 3



For extremely deep holes

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Guhring no. 529

Standard **DIN 1869**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.50

Standard range page 505

Extra length twist drills, series 3



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For extremely deep holes
For unsatisfactory chip evacuation

high tensile steels and cast steels
grey cast iron, malleable and spheroidal iron

Guhring no. 571

Standard **DIN 1869**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 2.50

Standard range page 505

Extra length twist drills



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 242

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 6.00

Standard range page 508

Extra length twist drills



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 243

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 8.00

Standard range page 509



Straight shank twist drills

Extra length twist drills



Wide flutes
For extremely deep holes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 244

Standard **Gühring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 10.00

Standard range page 510

Aircraft extension drills, 6 inches long



Al-alloyed sheets
laminated plates (sandwiched materials)
steel and cast iron

Gühring no. 577

Standard **NAS 907**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.50

Standard range page 511

Aircraft extension drills, 6 inches long



Al-alloyed sheets
laminated plates (sandwiched materials)
steel and cast iron

Gühring no. 579

Standard **NAS 907**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 135

Web thinned ≥Ø 1.50

Standard range page 511

Aircraft extension drills, 12 inches long



Al-alloyed sheets
laminated plates (sandwiched materials)
steel and cast iron

Gühring no. 578

Standard **NAS 907**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.50

Standard range page 514

Aircraft extension drills, 12 inches long



Al-alloyed sheets
laminated plates (sandwiched materials)
steel and cast iron

Gühring no. 580

Standard **NAS 907**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 135

Web thinned ≥Ø 1.50

Standard range page 514

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Straight shank twist drills

Straight shank twist drills

Taper pin drills



For tapered holes
For holding taper pins
To DIN 1 (new: DIN EN 22 339)
and DIN 7978 (new: DIN EN 28 736)
With tang

Guhring no. 531

Standard **DIN 1898**

Tool material **HSS**

Surface 2,36

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.00

Standard range page 516

Carbide-tipped twist drill



Carbide tipped

spring steel
hard cast iron over 300 Brinell
pure molybdenum
hard bronzes

Guhring no. 703

Standard **DIN 8037**

Tool material **Carbide**

Surface

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 118

Web thinned $\geq \emptyset$ 1.70

Standard range page 517

Carbide-tipped twist drill



Carbide tipped

glass fibres reinforced plastics
Duroplastics that cause wear on lands and cutting edges

Guhring no. 704

Standard **DIN 8038**

Tool material **Carbide**

Surface

Type N

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 85

Web thinned $\geq \emptyset$ 1.50

Standard range page 517

Kevlar drills



Special point grind

fiber reinforced plastics

Guhring no. 1149

Standard **Guhring std.**

Tool material **Solid carbide**

Surface

Type N

Cutting direction right-hand

Point geometry Special point grind

Point angle °

Web thinned $\geq \emptyset$

Standard range page 520

Carbide tipped spade drills



Special drill
In difficult conditions

Chilled cast iron
hard steel

Guhring no. 707

Standard **Guhring std.**

Tool material **Carbide**

Surface

Type

Cutting direction right-hand

Point geometry Facet point grind

Point angle ° 120

Web thinned $\geq \emptyset$ 3.00

Standard range page 521

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Masonry drills



Carbide tipped
For drills and hammer drills
Drilling tiles without hammer action!

brick, concrete, ceramic tiles

Gühring no. 716

Standard	Gühring std.
Tool material	Carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Facet point grind
Point angle °	120
Web thinned ≥Ø	
Standard range page	522

Straight shank twist drills



Taper shank twist drills

Taper shank twist drills

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

difficult to machine materials
acid resist./stainless steels
spring steels, austenitic steels

Guhring no. 363

Standard **Guhring std.**

Tool material **HSCO**

Surface

Type GV 120

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 7.00

Standard range page 523

Jobber drills



Co-alloyed high speed steel
Increased wear resistance

difficult to machine materials
acid resist./stainless steels
spring steels, austenitic steels

Guhring no. 663

Standard **Guhring std.**

Tool material **HSCO**

Surface

Type GV 120

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 9.00

Standard range page 523

Twist drills



Special geometry
Improved chip fracture
Note higher cutting rates

long chipping materials

Guhring no. 229

Standard **DIN 345**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 8.00

Standard range page 525

Twist drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and
graphite

Guhring no. 245

Standard **DIN 345**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 14.01

Standard range page 525

Twist drills



Standard drill

hard, crumbly materials
brass, magnesium alloys
bronze, phosphor bronze
thin zamak und electron
slate, mica, pertinax
with special point grind:
insulating materials, ebonit, bakelite
galalithe, celluloid, synthetic resins, horn com-
pounds
eternit, plexiglass

Guhring no. 246

Standard **DIN 345**

Tool material **HSS**

Surface

Type H

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 14.01

Standard range page 525

bright

steam tempered

nitrided lands

nitrided






golden brown

TiAIN

TiAIN nanoA

TiAIN SuperA



Twist drills		Guhring no. 247	
 Standard drill	soft/long chipping materials Aluminium, long chipping Al-alloys zinc, refined copper, silumin, electron	Standard	DIN 345
		Tool material	HSS
		Surface	○
		Type	W
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	14.01
		Standard range page	525
Twist drills		Guhring no. 248	
 Standard drill	alloyed/unalloyed steel and cast steel grey cast iron, malleable and spheroidal iron sintered powder metal, German silver and graphite	Standard	DIN 345
		Tool material	HSS
		Surface	●
		Type	N
		Cutting direction	left-hand
		Point geometry	Relieved cone
		Point angle °	118
		Web thinned ≥Ø	14.01
		Standard range page	525
Twist drills		Guhring no. 558	
 Wide flutes Especially for drilling depths over 3xd	cast iron and steels up to 1000 N/mm ² Not recommended for: CrNi steels, stainless steels	Standard	DIN 345
		Tool material	HSS
		Surface	● ^{>Ø} _{16,0}
		Type	GT 100
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	7.94
		Standard range page	525
Twist drills		Guhring no. 592	
 Special geometry For heavy duty appl. in the steel ind.	alloyed/unalloyed steel and cast steel	Standard	DIN 345
		Tool material	HSS
		Surface	● ^{>Ø} _{16,0}
		Type	N
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	118
		Web thinned ≥Ø	10.00
		Standard range page	525
Twist drills		Guhring no. 606	
 Wide flutes Especially for drilling depths over 3xd	cast iron and steels up to 1000 N/mm ² Not recommended for: CrNi steels, stainless steels	Standard	DIN 345
		Tool material	HSS
		Surface	● ^S
		Type	GT 100
		Cutting direction	right-hand
		Point geometry	Relieved cone
		Point angle °	130
		Web thinned ≥Ø	7.94
		Standard range page	537



Twist drills



Standard drill

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 654

Standard **DIN 345**

Tool material **HSS**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 3.00

Standard range page 537

Twist drills



Co-alloyed high speed steel
Increased wear resistance

alloyed/unalloyed steels and castings over 800
N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 345

Standard **DIN 345**

Tool material **HSCO**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 3.00

Standard range page 537

Twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed/unalloyed steels and castings over 1000
N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 645

Standard **DIN 345**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 9.52

Standard range page 537

Twist drills



Co-alloyed high speed steel
Increased wear resistance

alloyed/unalloyed steels and castings over 800
N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 661

Standard **DIN 345**

Tool material **HSCO**

Surface **S**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 7.94

Standard range page 537

Twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed/unalloyed steels and castings over 1000
N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 662

Standard **DIN 345**

Tool material **HSCO**

Surface **S**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 10.00

Standard range page 537

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed/unalloyed steels and castings over 1000 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 1222

Standard **DIN 345**

Tool material **HSCO**

Surface **C**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 10.00

Standard range page 537

Twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
Especially for drilling depths over 3xd

alloyed/unalloyed steels and castings over 1000 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 1224

Standard **DIN 345**

Tool material **HSCO**

Surface **A**

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 10.00

Standard range page 543

Twist drills



Co-alloyed high speed steel
Special geometry
Increased wear resistance

stainless/acid-/heat resistant austenitic steels (V2A and V4A)

Guhring no. 1262

Standard **DIN 345**

Tool material **HSCO**

Surface **○**

Type VA

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø

Standard range page 543

Twist drills



Standard drill
Oversize shank

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 251

Standard **DIN 346**

Tool material **HSS**

Surface **●**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 14.01

Standard range page 545

Twist drills



Co-alloyed high speed steel
Increased wear resistance
Oversize shank

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Guhring no. 351

Standard **DIN 346**

Tool material **HSCO**

Surface **●**

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 10.00

Standard range page 545

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Bushing length twist drills



Special geometry
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 257

Standard **DIN 341**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 14.01

Standard range page 547

Bushing length twist drills



Especially large flute

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Guhring no. 505

Standard **DIN 341**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 4.20

Standard range page 547

Bushing length twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 551

Standard **DIN 341**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 5.50

Standard range page 547

Bushing length twist drills



Special geometry
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Guhring no. 655

Standard **DIN 341**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 4.00

Standard range page 547

Bushing length twist drills



Wide flutes
For unsatisfactory chip evacuation

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 656

Standard **DIN 341**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned $\geq \emptyset$ 5.60

Standard range page 547

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Bushing length twist drills



Co-alloyed high speed steel
Special geometry
Increased wear resistance
For drilling through drill bushes

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Gühring no. 357

Standard **DIN 341**

Tool material **HSCO**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 4.75

Standard range page 547

Bushing length twist drills



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For unsatisfactory chip evacuation

alloyed/unalloyed steels and castings over 800 N/mm²
hot and cold rolled steels
antifriction bearing steels
high alloyed steels
Heat treatable and case hardened steels

Gühring no. 623

Standard **DIN 341**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 10.00

Standard range page 547

Bushing length twist drills



Special geometry
Oversize shank
For drilling through drill bushes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal, German silver and graphite

Gühring no. 523

Standard **Gühring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 14.01

Standard range page 554

Oil feed drills short



For drilling through drill bushes

laminated sheet metal
steel and cast steel, grey cast iron
austenitic steels up to 800 N/mm²

Gühring no. 269

Standard **Gühring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 9.52

Standard range page 555

Oil feed drills, flute length to DIN 341



For drilling through drill bushes

laminated sheet metal
steel and cast steel, grey cast iron
austenitic steels up to 800 N/mm²

Gühring no. 1101

Standard **Gühring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 10.00

Standard range page 557

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Oil feed drills, flute length to DIN 341



For drilling through drill bushes

laminated sheet metal steel and cast steel, grey cast iron austenitic steels up to 800 N/mm²

Guhring no. 270

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	10.00
Standard range page	558

Oil feed drills, flute length to DIN 341



For drilling through drill bushes

laminated sheet metal steel and cast steel, grey cast iron austenitic steels up to 800 N/mm²

Guhring no. 271

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	10.00
Standard range page	558

Oil feed drills, flute length to DIN 341



For drilling through drill bushes

laminated sheet metal steel and cast steel, grey cast iron austenitic steels up to 800 N/mm²

Guhring no. 272

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	10.00
Standard range page	558

Oil feed drills, flute length to DIN 341



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels cast steel, grey cast iron stainless/acid/heat resistant steels tensile strength between 800 and 1300 N/mm²

Guhring no. 370

Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	558

Oil feed drills, flute length to DIN 341



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels cast steel, grey cast iron stainless/acid/heat resistant steels tensile strength between 800 and 1300 N/mm²

Guhring no. 371

Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	558



Oil feed drills, flute length to DIN 341



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels
cast steel, grey cast iron
stainless/acid/heat resistant steels
tensile strength between 800 and 1300 N/mm²

Gühring no. 372

Standard	Gühring std.
Tool material	HSCO
Surface	
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	558

Oil feed drills, flute length to DIN 1870



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels
cast steel, grey cast iron
stainless/acid/heat resistant steels
tensile strength between 800 and 1300 N/mm²

Gühring no. 374

Standard	Gühring std.
Tool material	HSCO
Surface	
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	561

Oil feed drills, flute length to DIN 1870



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels
cast steel, grey cast iron
stainless/acid/heat resistant steels
tensile strength between 800 and 1300 N/mm²

Gühring no. 375

Standard	Gühring std.
Tool material	HSCO
Surface	
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	561

Oil feed drills, flute length to DIN 1870



Co-alloyed high speed steel
Increased wear resistance
For drilling through drill bushes

tensile and high tensile steels
cast steel, grey cast iron
stainless/acid/heat resistant steels
tensile strength between 800 and 1300 N/mm²

Gühring no. 376

Standard	Gühring std.
Tool material	HSCO
Surface	
Type	GT 100
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	130
Web thinned ≥Ø	11.00
Standard range page	561

Extra length twist drills, series 1



For extremely deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Gühring no. 266

Standard	DIN 1870
Tool material	HSS
Surface	
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	7.55
Standard range page	563



Extra length twist drills, series 1



For extremely deep holes
For soft and long-chipping materials

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Guhring no. 525

Standard **DIN 1870**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 7.75

Standard range page 563

Extra length twist drills, series 1



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 526

Standard **DIN 1870**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 5.80

Standard range page 563

Extra length twist drills, series 1



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For unsatisfactory chip evacuation
For extremely deep holes

high tensile steels and cast steels
grey cast iron, malleable and spheroidal iron

Guhring no. 620

Standard **DIN 1870**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 9.52

Standard range page 563

Extra length twist drills, series 2



For extremely deep holes

alloyed/unalloyed steel and cast steel
grey cast iron, malleable and spheroidal iron
sintered powder metal

Guhring no. 267

Standard **DIN 1870**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 7.70

Standard range page 566

Extra length twist drills, series 2



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 527

Standard **DIN 1870**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 7.50

Standard range page 566

bright

steam tempered

nitrided lands

nitrided

golden brown

TiAlN

TiAlN nanoA

TiAlN SuperA



Extra length twist drills, series 2



For extremely deep holes

long chipping materials up to 500 N/mm²
mild steel
Aluminium, long chipping Al-alloys
zinc, refined copper, silumin, electron
zamak, argalium, soft plastics, wood

Gühring no. 542

Standard **DIN 1870**

Tool material **HSS**

Surface

Type GT50

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 8.00

Standard range page 566

Extra length twist drills, series 2



Co-alloyed high speed steel
Wide flutes
Increased wear resistance
For unsatisfactory chip evacuation
For extremely deep holes

high tensile steels and cast steels
grey cast iron, malleable and spheroidal iron

Gühring no. 621

Standard **DIN 1870**

Tool material **HSCO**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 9.52

Standard range page 566

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 563

Standard **Gühring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 6.00

Standard range page 569

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 566

Standard **Gühring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 8.00

Standard range page 569

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Gühring no. 293

Standard **Gühring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 14.01

Standard range page 570

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 564

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 6.00

Standard range page 570

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 565

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 6.00

Standard range page 571

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 298

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 14.01

Standard range page 572

Extra length twist drills



Wide flutes
For unsatisfactory chip evacuation
For extremely deep holes

cast iron and steels up to 1000 N/mm²
Not recommended for:
CrNi steels, stainless steels

Guhring no. 299

Standard **Guhring std.**

Tool material **HSS**

Surface

Type GT 100

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 130

Web thinned ≥Ø 14.01

Standard range page 573

Taper pin drills



For tapered holes
For holding taper pins
To DIN 1 (new: DIN EN 22 339)
DIN 7978 (new: DIN EN 28 736),
DIN 7977 (new: DIN EN 28737) and DIN 258

Guhring no. 532

Standard **DIN 1898**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 5.00

Standard range page 574



Carbide-tipped twist drill



Carbide tipped

spring steel
 hard cast iron over 300 Brinell
 pure molybdenum
 hard bronzes
 glass fibres reinforced plastics
 (e.g. printed circuit boards)
 Duroplastics that cause wear on lands and
 cutting edges

Guhring no. 705

Standard	DIN 8041
Tool material	Carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned $\geq \emptyset$	8.00
Standard range page	575

Taper shank twist
drills



Stepped drills for centering to DIN 332



60° countersink angle
 For tapping size holes with centre
 To DIN 332, sheet 2, form D
 Application on centering/cut-off mach.

Guhring no. 274

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.30

Standard range page 576

Stepped drills for centering to DIN 332



60° countersink angle
 For tapping size holes with centre
 To DIN 332, sheet 2, form DR
 Application on centering/cut-off mach.

Guhring no. 574

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.30

Standard range page 576

Stepped drills for centering to DIN 332



Shank without flat
 60° countersink angle
 For tapping size holes with centre
 To DIN 332, sheet 2, form D

Guhring no. 575

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.30

Standard range page 577

Stepped drills for centering to DIN 332



Shank without flat
 60° countersink angle
 For tapping size holes with centre
 To DIN 332, sheet 2, form D

Guhring no. 576

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 6.80

Standard range page 578

Straight shank short step drills



Very high torsional stability
 For CNC and NC machines
 For through holes
 To DIN EN 20 273
 For screwhead countersinks 90°
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 378

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.20

Standard range page 579



Straight shank short step drills



Very high torsional stability
For CNC and NC machines
For through holes
To DIN EN 20 273
For screwhead countersinks 90°
f dependent on small diameter
vc dependent on large diameter

Gühring no. 1147

Standard **Gühring std.**

Tool material **HSS**

Surface ○

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.40

Standard range page 579

Straight shank short step drills



Very high torsional stability
For CNC and NC machines
For through holes
To DIN EN 20 273
For screwhead countersinks 180°
to DIN 974-1
For screws
to DIN 6912, 7513, 7984
f dependent on small diameter
vc dependent on large diameter

Gühring no. 379

Standard **Gühring std.**

Tool material **HSS**

Surface ○

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.40

Standard range page 580

Straight shank short step drills



Very high torsional stability
For CNC and NC machines
For tapping size holes
to DIN 336
For countersinking 90°
To DIN EN 20 273
f dependent on small diameter
vc dependent on large diameter

Gühring no. 380

Standard **Gühring std.**

Tool material **HSS**

Surface ○

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 2.50

Standard range page 581

Straight shank subland drills



fine tolerances
For through holes
To DIN EN 20 273
For screwhead countersinks 90°
f dependent on small diameter
vc dependent on large diameter

Gühring no. 536

Standard **DIN 8374**

Tool material **HSS**

Surface ●

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 3.20

Standard range page 582

Straight shank subland drills



For through holes
To DIN EN 20 273
For screwhead countersinks 90°
Form A and F
to DIN 74
f dependent on small diameter
vc dependent on large diameter

Gühring no. 569

Standard **DIN 8374**

Tool material **HSS**

Surface ●

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø

Standard range page 582





Straight shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 90°
 Form A
 to DIN 74
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 636

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	3.40
Standard range page	582

Straight shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 180°
 to DIN 974-1
 For screws
 to DIN 6912, 7513, 7984
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 638

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	3.20
Standard range page	582

Straight shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 180°
 to DIN 974-1
 For screws
 to DIN 6912, 7513, 7984
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 538

Standard	DIN 8376
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	3.40
Standard range page	583

Straight shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 180°
 to DIN 974-1
 For screws
 to DIN 6912, 7513, 7984
 f dependent on small diameter
 vc dependent on large diameter

abrasive materials
 AISi-alloys
 fiber reinforced plastics
 Duroplastics that cause wear on lands and cutting edges
 high tensile steels, cast steel, grey cast iron
 chilled cast iron, Mn hard steels, CrNi steels
 bronzes, light metals

Guhring no. 738

Standard	Guhring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	3.40
Standard range page	583

Straight shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 180°
 For screws
 to DIN 6912, 7513, 7984
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 514

Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	5.90
Standard range page	584



Straight shank subland drills



For tapping size holes to DIN 336
For countersinking 90°
For through holes
To DIN EN 20 273
f dependent on small diameter
vc dependent on large diameter

Gühring no. 540

Standard	DIN 8378
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	2.50
Standard range page	585

Straight shank subland drills



For tapping size holes to DIN 336
For countersinking 90°
For through holes
To DIN EN 20 273
f dependent on small diameter
vc dependent on large diameter

abrasive materials
AISI-alloys
fiber reinforced plastics
Duroplastics that cause wear on lands and cutting edges
high tensile steels, cast steel, grey cast iron
chilled cast iron, Mn hard steels, CrNi steels
bronzes, light metals

Gühring no. 739

Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	2.50
Standard range page	585

Taper shank subland drills



fine tolerances
For through holes
To DIN EN 20 273
For screwhead countersinks 90°
f dependent on small diameter
vc dependent on large diameter

Gühring no. 637

Standard	Gühring std.
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	6.40
Standard range page	586

Taper shank subland drills



fine tolerances
For through holes
To DIN EN 20 273
For screwhead countersinks 90°
f dependent on small diameter
vc dependent on large diameter

Gühring no. 537

Standard	Gühring std.
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	5.50
Standard range page	586

Taper shank subland drills



For through holes
To DIN EN 20 273
For screwhead countersinks 180°
to DIN 974-1
For screws
to DIN 6912, 7513, 7984
f dependent on small diameter
vc dependent on large diameter

Gühring no. 639

Standard	Gühring std.
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	118
Web thinned ≥Ø	5.30
Standard range page	587

C TiCN

Cb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Taper shank subland drills



For through holes
 To DIN EN 20 273
 For screwhead countersinks 180°
 to DIN 74
 For screws
 to DIN 6912, 7513, 7984
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 539

Standard **DIN 8377**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 5.50

Standard range page 588

Taper shank subland drills



For through holes
 With old countersinks form H, J, K
 To DIN 75, part 2
 For screws
 To DIN 84, 912, 6712
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 520

Standard **Guhring std.**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 5.30

Standard range page 589

Taper shank subland drills



For tapping size holes
 To DIN 336, part 1
 For countersinking 90°
 To DIN EN 20 273
 f dependent on small diameter
 vc dependent on large diameter

Guhring no. 541

Standard **DIN 8379**

Tool material **HSS**

Surface

Type N

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 6.80

Standard range page 590

Center drills without flat



For centre holes
Form A to U.S. standards

Gühring no. 594

Standard ASA

Tool material HSS

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 591

Center drills

Center drills without flat



For centre holes
Form B to U.S. standards

Gühring no. 595

Standard ASA

Tool material HSS

Surface

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 592

Center drills without flat



For centre holes
Form A to British standards

Gühring no. 292

Standard BS 328

Tool material HSS

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.19

Standard range page 593

Center drills without flat



For centre holes
Form A to British standards

Gühring no. 294

Standard BS 328

Tool material HSS

Surface

Form A

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.19

Standard range page 593

Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
d1 \leq 0.8 mm: not double ended

Gühring no. 581

Standard DIN 333

Tool material HSS

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 594



Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
 $d1 \leq 0.8$ mm: not double ended

Guhring no. 582

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form A

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 594

Center drills without flat



Especially high rigidity
Correct positioning between lathe centers
For centre holes
To DIN 332, sheet 1, form R
 $d1 \leq 0.8$ mm: not double ended

Guhring no. 583

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form R

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 594

Center drills without flat



Especially high rigidity
Correct positioning between lathe centers
For centre holes
To DIN 332, sheet 1, form R
 $d1 \leq 0.8$ mm: not double ended

Guhring no. 584

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form R

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 594

Center drills without flat



With heel
Without protected countersink
Recess between countersink and hole
Especially high rigidity
High cutting rates
For centre holes
To DIN 332, sheet 1, form A

Guhring no. 590

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 595

Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
 $d1 \leq 0.8$ mm: not double ended

Guhring no. 613

Standard **DIN 333**

Tool material **HSS**

Surface **S**

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 595

○ bright

○ steam tempered

● nitrided lands

● nitrided

● golden brown

A TiAlN

a TiAlN nanoA

A TiAlN SuperA



Center drills without flat



Especially high rigidity
Correct positioning between lathe centers
For centre holes
To DIN 332, sheet 1, form R
d1 ≤ 0.8 mm: not double ended

Guhring no. 614

Standard **DIN 333**

Tool material **HSS**

Surface **S**

Form R

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 595

Center drills without flat



Co-alloyed high speed steel
Without protected countersink
Increased wear resistance
For centre holes
To DIN 332, sheet 1, form A

materials over 800 N/mm²
stainl./acid-/heat-res. CrNi steel s

Guhring no. 381

Standard **DIN 333**

Tool material **HSCO**

Surface ○

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 595

Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
d1 ≤ 0.8 mm: not double ended

abrasive materials
AISI-alloys
fiber reinforced plastics
Duroplastics that cause wear on lands and cutting edges
high tensile steels, cast steel, grey cast iron
chilled cast iron, Mn hard steels, CrNi steels
bronzes, light metals

Guhring no. 736

Standard **Guhring std.**

Tool material **Solid carbide**

Surface ○

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 595

Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
d1 ≤ 0.8 mm: not double ended

Guhring no. 281

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 596

Center drills without flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
d1 ≤ 0.8 mm: not double ended

Guhring no. 282

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form A

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 596

C TiCN

Gb Carbo

D Cristall

F FIRE/nanoFIRE

P AlCrN

S TiN

S+ TiN+

M MolyGlide

Y Signum



Center drills without flat



Especially high rigidity
 Correct positioning between lathe centers
 For centre holes
 To DIN 332, sheet 1, form R
 d1 ≤ 0.8 mm: not double ended

Guhring no. 283

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form R

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 596

Center drills without flat



Especially high rigidity
 Correct positioning between lathe centers
 For centre holes
 To DIN 332, sheet 1, form R

Guhring no. 284

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form R

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 596

Center drills without flat



For centre holes
 To DIN 332, sheet 1, form B
 With protected 120° countersink

Guhring no. 585

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 597

Center drills without flat



For centre holes
 To DIN 332, sheet 1, form B
 With protected 120° countersink

Guhring no. 586

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form B

Cutting direction left-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 597

Center drills without flat



With heel
 Recess between countersink and hole
 Especially high rigidity
 High cutting rates
 For centre holes
 To DIN 332, sheet 1, form B
 With protected 120° countersink
 d1 ≤ 0.8 mm: not double ended

Guhring no. 591

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 597

○ bright

○ steam tempered

● nitrided lands

● nitrided

● golden brown

Ⓐ TiAlN

Ⓐ TiAlN nanoA

Ⓐ TiAlN SuperA

Center drills without flat



Long special drill
Without protected countersink
For centre holes
To DIN 332, sheet 1, form A
For deep centering positions

Gühring no. 280

Standard **Gühring std.**Tool material **HSS**

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 598

Center drills

Center drills without flat



For centre holes
With protected 120° countersink

Gühring no. 285

Standard **Gühring std.**Tool material **HSS**

Surface

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 599

Center drills with flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A

Gühring no. 587

Standard **DIN 333**Tool material **HSS**

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 600

Center drills with flat



Especially high rigidity
Correct positioning between lathe centers
For centre holes
To DIN 332, sheet 1, form R

Gühring no. 588

Standard **DIN 333**Tool material **HSS**

Surface

Form R

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 600

Center drills with flat



Without protected countersink
For centre holes
To DIN 332, sheet 1, form A

Gühring no. 287

Standard **DIN 333**Tool material **HSS**

Surface

Form A

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned $\geq \emptyset$ 1.60

Standard range page 601

C TiCN**Gb** Carbo**D** Cristall**F** FIRE/nanoFIRE**P** AlCrN**S** TiN**S+** TiN+**M** MolyGlide**Y** Signum



Center drills with flat



Especially high rigidity
 Correct positioning between lathe centers
 For centre holes
 To DIN 332, sheet 1, form R

Guhring no. 288

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form R

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 601

Center drills with flat



For centre holes
 To DIN 332, sheet 1, form B
 With protected 120° countersink

Guhring no. 589

Standard **DIN 333**

Tool material **HSS**

Surface ○

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 602

Center drills with flat



For centre holes
 To DIN 332, sheet 1, form B
 With protected 120° countersink

Guhring no. 289

Standard **Guhring std.**

Tool material **HSS**

Surface ○

Form B

Cutting direction right-hand

Point geometry Relieved cone

Point angle ° 118

Web thinned ≥Ø 1.60

Standard range page 603



Straight shank core drills



Core drills
Three flutes
Especially high rigidity
For pre-drilled/-cast/-punched holes
Corrects alignment inaccuracies
Corrects circularity errors
Improved surface quality of hole
Observe min. pilot hole dia.
Chamfer dia. < tapping size hole
Perf. finish reaming after core drilling

steels over 1000 N/mm²
cast iron over 240 Brinell
Mn-steels, AISi alloys
hard and abrasive plastics

Gühring no. 750

Standard	Gühring std.
Tool material	Carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	604

Straight shank core drills



Core drills
Three flutes
Especially high rigidity
For pre-drilled/-cast/-punched holes
Corrects alignment inaccuracies
Corrects circularity errors
Improved surface quality of hole
Observe min. pilot hole dia.
Chamfer dia. < tapping size hole
Perf. finish reaming after core drilling

Gühring no. 533

Standard	DIN 344
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	605

Taper shank core drills



Core drills, carbide tipped
Especially high rigidity
For pre-drilled/-cast/-punched holes
Corrects alignment inaccuracies
Corrects circularity errors
Improved surface quality of hole
Observe min. pilot hole dia.
Chamfer dia. < tapping size hole
Perf. finish reaming after core drilling

steels over 1000 N/mm²
cast iron over 240 Brinell
Mn-steels, AISi alloys
hard and abrasive plastics

Gühring no. 729

Standard	Gühring std.
Tool material	Carbide
Surface	○
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	608

Taper shank core drills



Core drills
Three flutes
Especially high rigidity
For pre-drilled/-cast/-punched holes
Corrects alignment inaccuracies
Corrects circularity errors
Improved surface quality of hole
Observe min. pilot hole dia.
Chamfer dia. < tapping size hole
Perf. finish reaming after core drilling

Gühring no. 534

Standard	DIN 343
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	609

Taper shank core drills



Core drills
Co-alloyed high speed steel
Especially high rigidity
For pre-drilled/-cast/-punched holes
Corrects alignment inaccuracies
Corrects circularity errors
Improved surface quality of hole
Observe min. pilot hole dia.
Chamfer dia. < tapping size hole
Perf. finish reaming after core drilling

Gühring no. 634

Standard	DIN 343
Tool material	HSCO
Surface	●
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	609



Taper shank core drills



Core drills
 Co-alloyed high speed steel
 Especially high rigidity
 For pre-drilled/-cast/-punched holes
 Corrects alignment inaccuracies
 Corrects circularity errors
 Improved surface quality of hole
 Observe min. pilot hole dia.
 Chamfer dia. < tapping size hole
 Perf. finish reaming after core drilling

Guhring no. 635

Standard	DIN 1864
Tool material	HSCO
Surface	
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	613

Taper shank core drills



Core drills
 Especially high rigidity
 For pre-drilled/-cast/-punched holes
 Corrects alignment inaccuracies
 Corrects circularity errors
 Improved surface quality of hole
 Observe min. pilot hole dia.
 Chamfer dia. < tapping size hole
 Perf. finish reaming after core drilling

Guhring no. 555

Standard	DIN 1864
Tool material	HSS
Surface	
Type	N
Cutting direction	right-hand
Point geometry	Relieved cone
Point angle °	120
Web thinned ≥Ø	
Standard range page	614



Oil feed adaptors

Gühring no. 230



Standard **Gühring std.**

Standard range page **615**

Accessories

Product information
 For Gühring oil feed drills
 (gühring no. 269, 271, 371 and 375)
 Suitable for all drilling machines.
 The oil feed drill fits direct into the
 spindle.
 Radial coolant via the ball race at the
 run-out of the flutes.

The adaptor does not extend the
 drilling system.
 Longitudinal stability and torsional
 rigidity are completely maintained.
 Coolant: soluble oil.
 Thin cutting oil can be used.
 As a rule, coolant pumps are sufficient.




Ratio drills without oil feed

Ratio drills

Guhring no.	1184	2480	2472	2475	8524
Standard	DIN 6537 K				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F	RT 100 HF
Drilling depth	3xD	3xD	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	121	121
Techn. data page	90	90	90	90	90

NEW

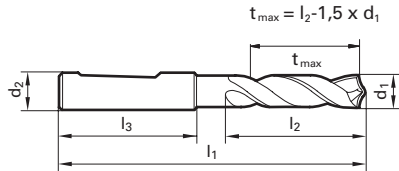


d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	1184	2480	2472	2475	8524
3.000		6.000	62.00	20.00	36.00	●	●	●		●
3.100		6.000	62.00	20.00	36.00	●	●	●		●
3.170	1/8	6.000	62.00	20.00	36.00		●	●		●
3.200		6.000	62.00	20.00	36.00	●	●	●		●
3.250		6.000	62.00	20.00	36.00		●	●		●
3.300		6.000	62.00	20.00	36.00	●	●	●		●
3.400		6.000	62.00	20.00	36.00	○	●	●		●
3.500		6.000	62.00	20.00	36.00	●	●	●		●
3.570	9/64	6.000	62.00	20.00	36.00	●	●	●		●
3.600		6.000	62.00	20.00	36.00	○	●	●		●
3.700		6.000	62.00	20.00	36.00	○	●	●	●	●
3.800		6.000	66.00	24.00	36.00	●	●	●		●
3.900		6.000	66.00	24.00	36.00	○	●	●		●
3.970	5/32	6.000	66.00	24.00	36.00	○	●	●		●
4.000		6.000	66.00	24.00	36.00	●	●	●		●
4.100		6.000	66.00	24.00	36.00	●	●	●		●
4.200		6.000	66.00	24.00	36.00	●	●	●		●
4.300		6.000	66.00	24.00	36.00		●	●		●
4.370	11/64	6.000	66.00	24.00	36.00		●	●		●
4.400		6.000	66.00	24.00	36.00	○	●	●		●
4.500		6.000	66.00	24.00	36.00	●	●	●		●
4.600		6.000	66.00	24.00	36.00	●	●	●		●
4.650		6.000	66.00	24.00	36.00		●	●	●	●
4.700		6.000	66.00	24.00	36.00	○	●	●		●
4.760	3/16	6.000	66.00	28.00	36.00	○	●	●		●
4.800		6.000	66.00	28.00	36.00	●	●	●		●
4.900		6.000	66.00	28.00	36.00	●	●	●		●
5.000		6.000	66.00	28.00	36.00	●	●	●	●	●
5.100		6.000	66.00	28.00	36.00	●	●	●		●
5.160	13/64	6.000	66.00	28.00	36.00	○	●	●		●
5.200		6.000	66.00	28.00	36.00	●	●	●		●
5.300		6.000	66.00	28.00	36.00	●	●	●		●
5.400		6.000	66.00	28.00	36.00	●	●	●		●
5.500		6.000	66.00	28.00	36.00	●	●	●	○	●
5.550		6.000	66.00	28.00	36.00		●	●		●
5.560	7/32	6.000	66.00	28.00	36.00	●	●	●		●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAN ● a TiAN nanoA ● A TiAN SuperA



Guhring no.	1184	2480	2472	2475	8524
Standard	DIN 6537 K				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F	RT 100 HF
Drilling depth	3xD	3xD	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	121	121
Techn. data page	90	90	90	90	90

NEW

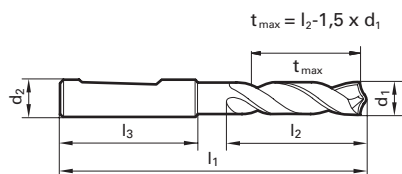

d1						Availability								
mm	inch	d2	mm	l1	mm	l2	mm	l3	mm					
5.600		6.000	66.00	28.00	36.00									
5.650		6.000	66.00	28.00	36.00									
5.700		6.000	66.00	28.00	36.00									
5.800		6.000	66.00	28.00	36.00									
5.900		6.000	66.00	28.00	36.00									
5.950	15/64	6.000	66.00	28.00	36.00									
6.000		6.000	66.00	28.00	36.00									
6.100		8.000	79.00	34.00	36.00									
6.200		8.000	79.00	34.00	36.00									
6.300		8.000	79.00	34.00	36.00									
6.350	1/4	8.000	79.00	34.00	36.00									
6.400		8.000	79.00	34.00	36.00									
6.500		8.000	79.00	34.00	36.00									
6.600		8.000	79.00	34.00	36.00									
6.700		8.000	79.00	34.00	36.00									
6.750	17/64	8.000	79.00	34.00	36.00									
6.800		8.000	79.00	34.00	36.00									
6.900		8.000	79.00	34.00	36.00									
7.000		8.000	79.00	34.00	36.00									
7.100		8.000	79.00	41.00	36.00									
7.140	9/32	8.000	79.00	41.00	36.00									
7.200		8.000	79.00	41.00	36.00									
7.300		8.000	79.00	41.00	36.00									
7.400		8.000	79.00	41.00	36.00									
7.500		8.000	79.00	41.00	36.00									
7.540	19/64	8.000	79.00	41.00	36.00									
7.600		8.000	79.00	41.00	36.00									
7.700		8.000	79.00	41.00	36.00									
7.800		8.000	79.00	41.00	36.00									
7.900		8.000	79.00	41.00	36.00									
7.940	5/16	8.000	79.00	41.00	36.00									
8.000		8.000	79.00	41.00	36.00									
8.100		10.000	89.00	47.00	40.00									
8.200		10.000	89.00	47.00	40.00									
8.300		10.000	89.00	47.00	40.00									
8.330	21/64	10.000	89.00	47.00	40.00									




Ratio drills without oil feed

Ratio drills

Guhring no.	1184	2480	2472	2475	8524
Standard	DIN 6537 K				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F	RT 100 HF
Drilling depth	3xD	3xD	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	121	121
Techn. data page	90	90	90	90	90

NEW

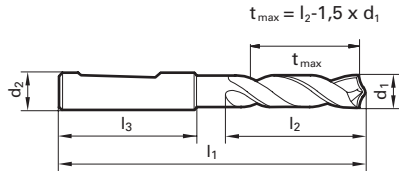

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	1184	2480	2472	2475	8524
8.400		10.000	89.00	47.00	40.00	○	●	●		●
8.500		10.000	89.00	47.00	40.00	●	●	●	●	●
8.600		10.000	89.00	47.00	40.00		●	●		●
8.700		10.000	89.00	47.00	40.00	○	●	●		●
8.730	11/32	10.000	89.00	47.00	40.00	●	●	●		●
8.800		10.000	89.00	47.00	40.00	●	●	●		●
8.900		10.000	89.00	47.00	40.00	○	●	●		●
9.000		10.000	89.00	47.00	40.00	○	●	●	●	●
9.100		10.000	89.00	47.00	40.00	○	●	●		●
9.130	23/64	10.000	89.00	47.00	40.00	●	●	●		●
9.200		10.000	89.00	47.00	40.00	○	●	●		●
9.250		10.000	89.00	47.00	40.00		●	●		●
9.300		10.000	89.00	47.00	40.00	○	●	●	○	●
9.400		10.000	89.00	47.00	40.00	○	●	●		●
9.500		10.000	89.00	47.00	40.00	●	●	●		●
9.520	3/8	10.000	89.00	47.00	40.00	●	●	●		●
9.600		10.000	89.00	47.00	40.00	○	●	●		●
9.700		10.000	89.00	47.00	40.00	○	●	●		●
9.800		10.000	89.00	47.00	40.00	○	●	●		●
9.900		10.000	89.00	47.00	40.00	○	●	●		●
9.920	25/64	10.000	89.00	47.00	40.00	○	●	●		●
10.000		10.000	89.00	47.00	40.00	●	●	●	●	●
10.100		12.000	102.00	55.00	45.00	●	●	●	●	●
10.200		12.000	102.00	55.00	45.00	○	●	●		●
10.300		12.000	102.00	55.00	45.00	●	●	●		●
10.320	13/32	12.000	102.00	55.00	45.00	○	●	●		●
10.400		12.000	102.00	55.00	45.00		●	●		●
10.500		12.000	102.00	55.00	45.00	●	●	●	○	●
10.600		12.000	102.00	55.00	45.00	●	●	●		●
10.700		12.000	102.00	55.00	45.00		●	●		●
10.720	27/64	12.000	102.00	55.00	45.00	○	●	●		●
10.800		12.000	102.00	55.00	45.00	●	●	●		●
10.900		12.000	102.00	55.00	45.00		●	●		●
11.000		12.000	102.00	55.00	45.00	○	●	●	●	●
11.100		12.000	102.00	55.00	45.00	○	●	●		●
11.110	7/16	12.000	102.00	55.00	45.00	●	●	●		●


○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Guhring no.	1184	2480	2472	2475	8524
Standard	DIN 6537 K				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F	RT 100 HF
Drilling depth	3xD	3xD	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	121	121
Techn. data page	90	90	90	90	90

Ratio drills

NEW

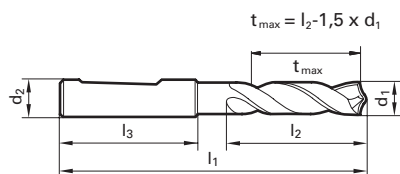

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	1184	2480	2472	2475	8524
11.200		12.000	102.00	55.00	45.00	●	●	●	●	●
11.300		12.000	102.00	55.00	45.00	●	●	●	●	●
11.400		12.000	102.00	55.00	45.00	●	●	●	●	●
11.500		12.000	102.00	55.00	45.00	●	●	●	●	●
11.600		12.000	102.00	55.00	45.00	○	●	●	●	●
11.700		12.000	102.00	55.00	45.00	●	●	●	●	●
11.800		12.000	102.00	55.00	45.00	●	●	●	●	●
11.900		12.000	102.00	55.00	45.00	●	●	●	●	●
11.910	15/32	12.000	102.00	55.00	45.00	○	●	●	●	●
12.000		12.000	102.00	55.00	45.00	●	●	●	●	●
12.100		14.000	107.00	60.00	45.00	●	●	○	●	●
12.200		14.000	107.00	60.00	45.00	○	●	●	●	●
12.300	31/64	14.000	107.00	60.00	45.00	○	●	●	●	●
12.400		14.000	107.00	60.00	45.00	●	●	●	●	●
12.500		14.000	107.00	60.00	45.00	●	●	●	●	●
12.600		14.000	107.00	60.00	45.00	●	●	●	●	●
12.700	1/2	14.000	107.00	60.00	45.00	●	●	●	●	●
12.800		14.000	107.00	60.00	45.00	●	●	●	●	●
13.000		14.000	107.00	60.00	45.00	●	●	●	○	●
13.100	33/64	14.000	107.00	60.00	45.00	○	●	●	●	●
13.200		14.000	107.00	60.00	45.00	●	●	●	●	●
13.300		14.000	107.00	60.00	45.00	○	●	●	●	●
13.400		14.000	107.00	60.00	45.00	○	●	●	●	●
13.500		14.000	107.00	60.00	45.00	●	●	●	●	●
13.700		14.000	107.00	60.00	45.00	●	●	●	●	●
13.800		14.000	107.00	60.00	45.00	●	●	●	●	●
13.890	35/64	14.000	107.00	60.00	45.00	●	●	●	●	●
14.000		14.000	107.00	60.00	45.00	●	●	●	●	●
14.200		16.000	115.00	65.00	48.00	○	●	●	●	●
14.290	9/16	16.000	115.00	65.00	48.00	●	●	●	●	●
14.300		16.000	115.00	65.00	48.00	●	●	●	●	●
14.400		16.000	115.00	65.00	48.00	○	○	●	●	●
14.500		16.000	115.00	65.00	48.00	●	●	●	●	●
14.700		16.000	115.00	65.00	48.00	●	○	●	●	●
14.800		16.000	115.00	65.00	48.00	●	●	●	●	●
15.000		16.000	115.00	65.00	48.00	●	●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum




Ratio drills without oil feed

Ratio drills

Guhring no.	1184	2480	2472	2475	8524
Standard	DIN 6537 K				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F	RT 100 HF
Drilling depth	3xD	3xD	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	121	121
Techn. data page	90	90	90	90	90

NEW

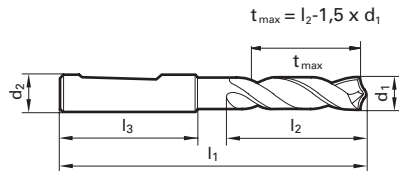

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	1184	2480	2472	2475	8524
15.100		16.000	115.00	65.00	48.00	●	●			
15.200		16.000	115.00	65.00	48.00	●	○	●		●
15.300		16.000	115.00	65.00	48.00		○			●
15.480	39/64	16.000	115.00	65.00	48.00	○				
15.500		16.000	115.00	65.00	48.00		●	●		●
15.600		16.000	115.00	65.00	48.00	○	●	●		
15.700		16.000	115.00	65.00	48.00	○	○	●		●
15.800		16.000	115.00	65.00	48.00	●	○	●		
15.870	5/8	16.000	115.00	65.00	48.00	●				
15.900		16.000	115.00	65.00	48.00	○				
16.000		16.000	115.00	65.00	48.00	●	●	●		●
16.100		18.000	123.00	73.00	48.00	●				
16.200		18.000	123.00	73.00	48.00			●		
16.270	41/64	18.000	123.00	73.00	48.00	●				
16.300		18.000	123.00	73.00	48.00	●		●		●
16.500		18.000	123.00	73.00	48.00	●	○	●		●
16.800		18.000	123.00	73.00	48.00	●				
16.900		18.000	123.00	73.00	48.00					●
17.000		18.000	123.00	73.00	48.00	●	●	●		●
17.300		18.000	123.00	73.00	48.00	●				●
17.460	11/16	18.000	123.00	73.00	48.00	●				●
17.500		18.000	123.00	73.00	48.00	●	○	●		●
17.700		18.000	123.00	73.00	48.00	○				
17.860	45/64	18.000	123.00	73.00	48.00	○				
18.000		18.000	123.00	73.00	48.00	●	●	●		●
18.100		20.000	131.00	79.00	50.00	○				
18.300		20.000	131.00	79.00	50.00	○		●		
18.500		20.000	131.00	79.00	50.00	○	○	●		●
18.650	47/64	20.000	131.00	79.00	50.00	○				
18.900		20.000	131.00	79.00	50.00					●
19.000		20.000	131.00	79.00	50.00	●	●	●		●
19.050	3/4	20.000	131.00	79.00	50.00	●				●
19.200		20.000	131.00	79.00	50.00	●				
19.300		20.000	131.00	79.00	50.00					●
19.500		20.000	131.00	79.00	50.00	●	○	●		●
19.600		20.000	131.00	79.00	50.00	○				


○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Ratio drills without oil feed

Ratio drills

Guhring no.	2717	2996	2719	2712
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface				
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	91	91	91	91

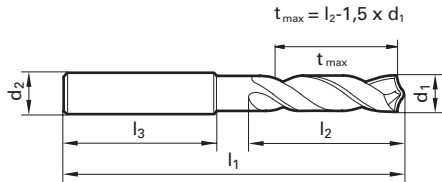


d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
3.000		6.000	66.00	28.00	36.00
3.100		6.000	66.00	28.00	36.00
3.170	1/8	6.000	66.00	28.00	36.00
3.200		6.000	66.00	28.00	36.00
3.250		6.000	66.00	28.00	36.00
3.300		6.000	66.00	28.00	36.00
3.400		6.000	66.00	28.00	36.00
3.500		6.000	66.00	28.00	36.00
3.570	9/64	6.000	66.00	28.00	36.00
3.600		6.000	66.00	28.00	36.00
3.700		6.000	66.00	28.00	36.00
3.800		6.000	74.00	36.00	36.00
3.900		6.000	74.00	36.00	36.00
3.970	5/32	6.000	74.00	36.00	36.00
4.000		6.000	74.00	36.00	36.00
4.100		6.000	74.00	36.00	36.00
4.200		6.000	74.00	36.00	36.00
4.300		6.000	74.00	36.00	36.00
4.370	11/64	6.000	74.00	36.00	36.00
4.400		6.000	74.00	36.00	36.00
4.500		6.000	74.00	36.00	36.00
4.600		6.000	74.00	36.00	36.00
4.650		6.000	74.00	36.00	36.00
4.700		6.000	74.00	36.00	36.00
4.760	3/16	6.000	82.00	44.00	36.00
4.800		6.000	82.00	44.00	36.00
4.900		6.000	82.00	44.00	36.00
5.000		6.000	82.00	44.00	36.00
5.100		6.000	82.00	44.00	36.00
5.160	13/64	6.000	82.00	44.00	36.00
5.200		6.000	82.00	44.00	36.00
5.300		6.000	82.00	44.00	36.00
5.400		6.000	82.00	44.00	36.00
5.500		6.000	82.00	44.00	36.00
5.550		6.000	82.00	44.00	36.00
5.560	7/32	6.000	82.00	44.00	36.00

Availability			
	●	●	●
	●	●	
	●	●	
●	●	●	●
●	●	●	●
	●	●	
	●	●	
	●	●	
●	●	●	●
	●	●	
	●	●	
	●	●	
	●	●	○
	●	●	
	●	●	
	●	●	
	●	●	
●	●	●	●
	●	●	
	●	●	
	●	●	
○	●	●	
	●	●	
	●	●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA




Guhring no.	2717	2996	2719	2712
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	F	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	91	91	91	91

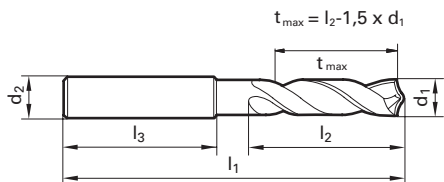

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm					
5.600		6.000	82.00	44.00	36.00		●		●	
5.700		6.000	82.00	44.00	36.00		●		●	
5.800		6.000	82.00	44.00	36.00		●		●	
5.900		6.000	82.00	44.00	36.00		●		●	
5.950	15/64	6.000	82.00	44.00	36.00		●		●	
6.000		6.000	82.00	44.00	36.00	○	●		●	
6.100		8.000	91.00	53.00	36.00		●		●	
6.200		8.000	91.00	53.00	36.00		●		●	
6.300		8.000	91.00	53.00	36.00		●		●	
6.350	1/4	8.000	91.00	53.00	36.00		●		●	
6.400		8.000	91.00	53.00	36.00		●		●	
6.500		8.000	91.00	53.00	36.00		●		●	
6.600		8.000	91.00	53.00	36.00		●		●	
6.700		8.000	91.00	53.00	36.00		●		●	
6.750	17/64	8.000	91.00	53.00	36.00		●		●	
6.800		8.000	91.00	53.00	36.00	○	●		●	●
6.900		8.000	91.00	53.00	36.00		●		●	
7.000		8.000	91.00	53.00	36.00	●	●		●	○
7.100		8.000	91.00	53.00	36.00		●		●	
7.140	9/32	8.000	91.00	53.00	36.00		●		●	
7.200		8.000	91.00	53.00	36.00		●		●	
7.300		8.000	91.00	53.00	36.00		●		●	
7.400		8.000	91.00	53.00	36.00		●		●	
7.500		8.000	91.00	53.00	36.00	○	●		●	○
7.540	19/64	8.000	91.00	53.00	36.00		●		●	
7.600		8.000	91.00	53.00	36.00		●		●	
7.700		8.000	91.00	53.00	36.00		●		●	
7.800		8.000	91.00	53.00	36.00		●		●	
7.900		8.000	91.00	53.00	36.00	○	●		●	
7.940	5/16	8.000	91.00	53.00	36.00		●		●	
8.000		8.000	91.00	53.00	36.00	●	●		●	●
8.100		10.000	103.00	61.00	40.00		●		●	
8.200		10.000	103.00	61.00	40.00		●		●	
8.300		10.000	103.00	61.00	40.00		●		●	
8.330	21/64	10.000	103.00	61.00	40.00		●		●	
8.400		10.000	103.00	61.00	40.00		●		●	



Guhring no.	2717	2996	2719	2712
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	F	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	91	91	91	91

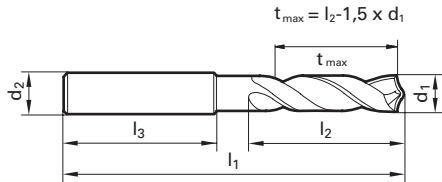


d1		d2	l1	l2	l3	Availability			
mm	inch	mm	mm	mm	mm				
8.500		10.000	103.00	61.00	40.00	●	●	●	
8.600		10.000	103.00	61.00	40.00		●	●	
8.700		10.000	103.00	61.00	40.00		●	●	
8.730	11/32	10.000	103.00	61.00	40.00		●	●	
8.800		10.000	103.00	61.00	40.00		●	●	
8.900		10.000	103.00	61.00	40.00		●	●	
9.000		10.000	103.00	61.00	40.00	○	●	●	
9.100		10.000	103.00	61.00	40.00		●	●	
9.130	23/64	10.000	103.00	61.00	40.00		●	●	
9.200		10.000	103.00	61.00	40.00		●	●	
9.250		10.000	103.00	61.00	40.00		●	●	
9.300		10.000	103.00	61.00	40.00		●	●	
9.400		10.000	103.00	61.00	40.00		●	●	
9.500		10.000	103.00	61.00	40.00		●	●	
9.520	3/8	10.000	103.00	61.00	40.00		●	●	
9.600		10.000	103.00	61.00	40.00		●	●	
9.700		10.000	103.00	61.00	40.00		●	●	
9.800		10.000	103.00	61.00	40.00		●	●	
9.900		10.000	103.00	61.00	40.00		●	●	
9.920	25/64	10.000	103.00	61.00	40.00		●	●	
10.000		10.000	103.00	61.00	40.00		●	●	○
10.100		12.000	118.00	71.00	45.00		●	●	
10.200		12.000	118.00	71.00	45.00	●	●	●	○
10.300		12.000	118.00	71.00	45.00		●	●	
10.320	13/32	12.000	118.00	71.00	45.00		●	●	
10.400		12.000	118.00	71.00	45.00		●	●	
10.500		12.000	118.00	71.00	45.00		●	●	○
10.600		12.000	118.00	71.00	45.00		●	●	
10.700		12.000	118.00	71.00	45.00		●	●	
10.800		12.000	118.00	71.00	45.00		●	●	
10.900		12.000	118.00	71.00	45.00		●	●	
11.000		12.000	118.00	71.00	45.00	○	●	●	
11.100		12.000	118.00	71.00	45.00		●	●	
11.110	7/16	12.000	118.00	71.00	45.00		●	●	
11.200		12.000	118.00	71.00	45.00	●	●	●	
11.300		12.000	118.00	71.00	45.00		●	●	

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown A TiAIN a TiAIN nanoA A TiAIN SuperA




Guhring no.	2717	2996	2719	2712
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	F	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	91	91	91	91

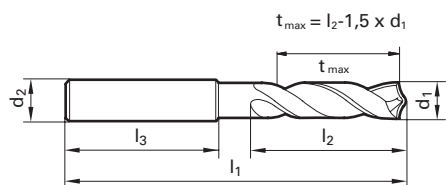

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm					
11.400		12.000	118.00	71.00	45.00		●		●	
11.500		12.000	118.00	71.00	45.00		●		●	
11.600		12.000	118.00	71.00	45.00		●		●	
11.700		12.000	118.00	71.00	45.00		●		●	
11.800		12.000	118.00	71.00	45.00		●		●	
11.900		12.000	118.00	71.00	45.00		●		●	
11.910	15/32	12.000	118.00	71.00	45.00		●		●	
12.000		12.000	118.00	71.00	45.00	○	●		●	○
12.100		14.000	124.00	77.00	45.00		●		●	
12.200		14.000	124.00	77.00	45.00		●		●	
12.400		14.000	124.00	77.00	45.00		○		●	
12.500		14.000	124.00	77.00	45.00		●		●	
12.600		14.000	124.00	77.00	45.00		○		●	
12.700	1/2	14.000	124.00	77.00	45.00		●		●	
12.800		14.000	124.00	77.00	45.00		○		●	
13.000		14.000	124.00	77.00	45.00	●	●		●	
13.100	33/64	14.000	124.00	77.00	45.00		●		●	
13.300		14.000	124.00	77.00	45.00		○		●	
13.500		14.000	124.00	77.00	45.00		●		●	
13.700		14.000	124.00	77.00	45.00		●		●	
14.000		14.000	124.00	77.00	45.00		●		●	
14.200		16.000	133.00	83.00	48.00		●		●	
14.290	9/16	16.000	133.00	83.00	48.00		●		●	
14.300		16.000	133.00	83.00	48.00		○		●	
14.400		16.000	133.00	83.00	48.00		●		●	
14.500		16.000	133.00	83.00	48.00		●		●	
14.700		16.000	133.00	83.00	48.00		●		●	
14.800		16.000	133.00	83.00	48.00		○		●	
15.000		16.000	133.00	83.00	48.00		●		●	○
15.100		16.000	133.00	83.00	48.00		●		●	
15.200		16.000	133.00	83.00	48.00		●		●	
15.300		16.000	133.00	83.00	48.00		●		●	
15.500		16.000	133.00	83.00	48.00		●		●	
15.600		16.000	133.00	83.00	48.00		○		●	
15.700		16.000	133.00	83.00	48.00		●		●	
15.800		16.000	133.00	83.00	48.00		●		●	



Gühring no.	2717	2996	2719	2712
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	F	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 F
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	91	91	91	91

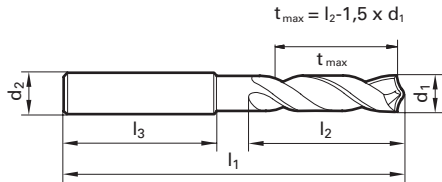


d1		d2	l1	l2	l3	Availability			
mm	inch	mm	mm	mm	mm				
16.000		16.000	133.00	83.00	48.00				
16.500		18.000	143.00	93.00	48.00		●	●	
17.000		18.000	143.00	93.00	48.00		●	●	
17.500		18.000	143.00	93.00	48.00		●	●	
18.000		18.000	143.00	93.00	48.00		●	●	
18.500		20.000	153.00	101.00	50.00		●	●	
19.000		20.000	153.00	101.00	50.00		●	●	
19.500		20.000	153.00	101.00	50.00		●	●	
20.000		20.000	153.00	101.00	50.00		●	●	

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAlN
- TiAlN nanoA
- TiAlN SuperA



Guhring no.	1242	2473	1702
Standard	DIN 6539		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	S
Type	RT 100 U	RT 100 U	RT 100 F
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	91	92	92




d1				Availability		
mm	inch	l1 mm	l2 mm	1242	2473	1702
3.000		46.00	16.00	●	●	●
3.100		49.00	18.00	●		●
3.170	1/8	49.00	18.00	●		●
3.200		49.00	18.00	●	●	●
3.300		49.00	18.00	●	●	●
3.400		52.00	20.00	●	○	●
3.500		52.00	20.00	●	●	●
3.570	9/64	52.00	20.00	●		○
3.600		52.00	20.00	●		●
3.700		52.00	20.00	●		●
3.800		55.00	22.00	●	●	●
3.900		55.00	22.00	●	●	●
3.970	5/32	55.00	22.00	●		●
4.000		55.00	22.00	●	●	●
4.100		55.00	22.00	●		●
4.200		55.00	22.00	●	●	●
4.300		58.00	24.00	●	●	●
4.370	11/64	58.00	24.00	●		●
4.400		58.00	24.00	●		●
4.500		58.00	24.00	●	○	●
4.600		58.00	24.00	●	○	●
4.700		58.00	24.00	●		○
4.760	3/16	62.00	26.00	●		●
4.800		62.00	26.00	●		●
4.900		62.00	26.00	●	●	●
5.000		62.00	26.00	●	●	●
5.100		62.00	26.00	●		●
5.160	13/64	62.00	26.00	●		●
5.200		62.00	26.00	●	●	○
5.300		62.00	26.00	●		●
5.400		66.00	28.00	●		○
5.500		66.00	28.00	●	●	●
5.560	7/32	66.00	28.00	●		●
5.600		66.00	28.00	●		●
5.700		66.00	28.00	●	●	●
5.800		66.00	28.00	●	○	●



Ratio drills without oil feed

Ratio drills

Guhring no.	1242	2473	1702
Standard	DIN 6539		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	S
Type	RT 100 U	RT 100 U	RT 100 F
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	91	92	92




d1				Availability		
mm	inch	l1 mm	l2 mm			
5.900		66.00	28.00	●		○
5.950	15/64	66.00	28.00	●		●
6.000		66.00	28.00	●		●
6.100		70.00	31.00	●	●	
6.200		70.00	31.00	●	●	●
6.300		70.00	31.00	●		●
6.350	1/4	70.00	31.00	●		●
6.400		70.00	31.00	●	○	○
6.500		70.00	31.00	●		●
6.600		70.00	31.00	●	○	●
6.700		70.00	31.00	●	○	●
6.750	17/64	74.00	34.00	●		○
6.800		74.00	34.00	●		●
6.900		74.00	34.00	●		●
7.000		74.00	34.00	●	●	●
7.100		74.00	34.00	●	●	○
7.140	9/32	74.00	34.00	●		○
7.200		74.00	34.00	●	●	●
7.300		74.00	34.00	○		●
7.400		74.00	34.00	●	○	○
7.500		74.00	34.00	●		●
7.540	19/64	79.00	37.00	●		●
7.600		79.00	37.00	●		●
7.700		79.00	37.00	●		●
7.800		79.00	37.00	●		○
7.900		79.00	37.00	●		●
7.940	5/16	79.00	37.00	●		●
8.000		79.00	37.00	●		●
8.100		79.00	37.00	●	●	●
8.200		79.00	37.00	●		●
8.300		79.00	37.00	●		○
8.330	21/64	79.00	37.00	○		●
8.400		79.00	37.00	●		●
8.500		79.00	37.00	●	●	●
8.600		84.00	40.00	●		●
8.700		84.00	40.00	●	○	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Guhring no.	1242	2473	1702
Standard	DIN 6539		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	S
Type	RT 100 U	RT 100 U	RT 100 F
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	91	92	92

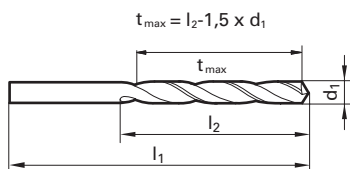


d1				Availability		
mm	inch	l1 mm	l2 mm	1242	2473	1702
8.730	11/32	84.00	40.00	●		●
8.800		84.00	40.00	●	○	○
8.900		84.00	40.00	○		●
9.000		84.00	40.00	●	○	○
9.100		84.00	40.00	●	○	○
9.130	23/64	84.00	40.00	●		○
9.200		84.00	40.00	●		
9.300		84.00	40.00	●		
9.400		84.00	40.00	●	○	
9.500		84.00	40.00	●		●
9.520	3/8	89.00	43.00	●		●
9.600		89.00	43.00	●		●
9.700		89.00	43.00	○		●
9.800		89.00	43.00	●		●
9.900		89.00	43.00	●		●
9.920	25/64	89.00	43.00	●		●
10.000		89.00	43.00	●	●	●
10.100		89.00	43.00	●		
10.200		89.00	43.00	●	○	●
10.300		89.00	43.00	○		○
10.320	13/32	89.00	43.00	●		●
10.400		89.00	43.00	●		
10.500		89.00	43.00	●	○	
10.600		89.00	43.00	●		
10.700		95.00	47.00	○		
10.720	27/64	95.00	47.00	●		●
10.800		95.00	47.00	●	○	
10.900		95.00	47.00	○		
11.000		95.00	47.00	●		●
11.100		95.00	47.00	●		
11.110	7/16	95.00	47.00	●		●
11.200		95.00	47.00	●		
11.300		95.00	47.00	●		○
11.400		95.00	47.00	○		
11.500		95.00	47.00	●	○	○
11.510	29/64	95.00	47.00	●		●



Ratio drills without oil feed

Ratio drills

Guhring no.	1242	2473	1702
Standard	DIN 6539		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	S
Type	RT 100 U	RT 100 U	RT 100 F
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	91	92	92




d1				Availability			
mm	inch	l1	l2				
11.600		95.00	47.00	●		●	
11.800		95.00	47.00	●		○	
11.900		102.00	51.00	●			
11.910	15/32	102.00	51.00	●			●
12.000		102.00	51.00	●		○	○
12.300	31/64	102.00	51.00				●
12.500		102.00	51.00	●		○	●
12.700	1/2	102.00	51.00	●			●
13.000		102.00	51.00	●			●
13.500		107.00	54.00	●			●
14.000		107.00	54.00	●		○	●
14.500		111.00	56.00	●			
15.000		111.00	56.00	●			
15.500		115.00	58.00	○		○	
16.000		115.00	58.00	●		●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Guhring no.	1243	2474
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K/P	
Surface	S	F
Type	RT 100 U	RT 100 U
Drilling depth	5xD	5xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	92	92

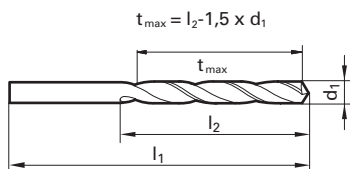

d1				Availability	
mm	inch	l1 mm	l2 mm		
5.000		73.00	34.00	●	●
5.100		76.00	38.00	●	●
5.160	13/64	76.00	38.00	●	
5.200		76.00	38.00	●	
5.300		76.00	38.00	●	
5.400		76.00	38.00	●	○
5.500		76.00	38.00	●	●
5.560	7/32	81.00	41.00	●	
5.600		81.00	41.00	●	●
5.700		81.00	41.00	●	○
5.800		81.00	41.00	○	
5.900		81.00	41.00	●	
5.950	15/64	81.00	41.00	○	
6.000		81.00	41.00	●	
6.100		81.00	41.00	●	
6.200		81.00	41.00	●	●
6.300		81.00	41.00	●	
6.350	1/4	81.00	41.00	●	
6.400		81.00	41.00	○	○
6.500		81.00	41.00	●	●
6.600		83.00	43.00	●	●
6.700		83.00	43.00	●	
6.750	17/64	83.00	43.00	●	
6.800		83.00	43.00	●	○
6.900		83.00	43.00	●	
7.000		83.00	43.00	●	
7.100		87.00	45.00	●	○
7.140	9/32	87.00	45.00	●	
7.200		87.00	45.00	●	○
7.300		87.00	45.00	○	
7.400		87.00	45.00	●	●
7.500		87.00	45.00	●	
7.540	19/64	90.00	48.00	●	
7.600		90.00	48.00	●	
7.700		90.00	48.00	●	○
7.800		90.00	48.00	○	



1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW



Availability						
○			●	●	●	●
			●	●	●	●
		●	●	●	●	●
		○	●	●	●	●
		●	●	●	●	●
●	●	●	●	●	●	●
●	●	●	●	●	●	●
●	○		●	●	●	●
	○	●	●	●	●	●
●			●	●	●	●
●	○	●	●	●	●	●
			●	●	●	●
●	●	○	●	●	●	●
○	○	●	●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW

Ratio drills



Availability						
○	○	●	●	●	●	●
●			●	●	●	●
		●	●	●	●	●
●	○	●	●	●	●	●
●	●	●	●	●	●	●
	○	○	●	●	●	●
●	●		●	●	●	●
○	●		●	●	●	●
●	○	●	●	●	●	●
●	●	●	●	●	●	●
●	●	●	●	●	●	●
●	●	○	●	●	●	●
○	○		●	●	●	●
○		●	●	○	●	●
	○		●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW




Availability						
●	●		●	●	●	●
●	●	●	●	●	●	●
●	○	●	●	●	●	●
○	●		●	●	●	●
●		●	●	○	●	●
●	○	●	●	●	●	●
○	●		●	●	●	●
●	○		●	●	●	●
●	●	●	●	●	●	●
○	○	○	●	●	●	●
●	○	○	●	●	●	●
●	●	●	●	●	●	●

C TiCN	Cb Carbo	D Cristall	F FIRE/nanoFIRE	P AlCrN	S TiN	S+ TiN+	M MolyGlide	Y Signum
--------	----------	------------	-----------------	---------	-------	---------	-------------	----------



Guhring no.	1181	2477	2469
Standard	DIN 6537 K		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	92	93	93

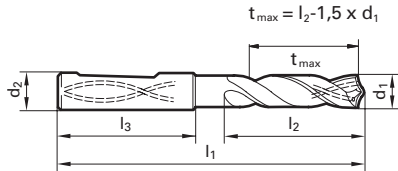

d1						Availability		
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	1181	2477	2469
10.200		12.000	102.00	55.00	45.00	○	●	●
10.300		12.000	102.00	55.00	45.00	●	●	●
10.320	13/32	12.000	102.00	55.00	45.00		●	●
10.400		12.000	102.00	55.00	45.00		●	●
10.500		12.000	102.00	55.00	45.00	○	●	●
10.600		12.000	102.00	55.00	45.00	○	●	●
10.700		12.000	102.00	55.00	45.00	●	●	●
10.720	27/64	12.000	102.00	55.00	45.00	○	●	●
10.800		12.000	102.00	55.00	45.00	○	●	●
10.900		12.000	102.00	55.00	45.00		●	●
11.000		12.000	102.00	55.00	45.00	●	●	●
11.100		12.000	102.00	55.00	45.00		●	●
11.110	7/16	12.000	102.00	55.00	45.00		●	●
11.200		12.000	102.00	55.00	45.00		●	●
11.300		12.000	102.00	55.00	45.00	○	●	●
11.400		12.000	102.00	55.00	45.00		●	●
11.500		12.000	102.00	55.00	45.00	○	●	●
11.510	29/64	12.000	102.00	55.00	45.00	○	●	●
11.550		12.000	102.00	55.00	45.00		●	●
11.600		12.000	102.00	55.00	45.00		●	●
11.700		12.000	102.00	55.00	45.00		●	●
11.800		12.000	102.00	55.00	45.00	●	●	●
11.900		12.000	102.00	55.00	45.00		●	●
11.910	15/32	12.000	102.00	55.00	45.00	○	●	●
12.000		12.000	102.00	55.00	45.00	●	●	●
12.100		14.000	107.00	60.00	45.00	●	●	○
12.200		14.000	107.00	60.00	45.00		●	●
12.300	31/64	14.000	107.00	60.00	45.00	●	●	●
12.400		14.000	107.00	60.00	45.00	●	○	○
12.500		14.000	107.00	60.00	45.00	○	●	●
12.600		14.000	107.00	60.00	45.00		●	●
12.700	1/2	14.000	107.00	60.00	45.00	○	●	●
12.800		14.000	107.00	60.00	45.00		●	●
12.900		14.000	107.00	60.00	45.00	●	●	●
13.000		14.000	107.00	60.00	45.00	●	●	●
13.100	33/64	14.000	107.00	60.00	45.00		●	●

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA




1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW



Availability						
○	○	●	●	○	●	●
○	●	○	●	●	●	●
○	●	●	●	●	●	●
●	●	●	●	●	●	●
○	○	●	●	●	●	●
●	●	●	●	●	●	●
○	○	●	●	●	●	●
○	○	●	●	●	●	●
●	○	●	●	●	●	●
○	○	●	●	●	●	●
●	○	●	●	●	●	●
○	○	●	●	●	●	●
●	●	●	●	●	●	●
○	○	●	●	●	●	●
○	○	○	●	●	●	●
○	○	○	●	●	●	●
○	●	●	●	●	●	●



Guhring no.	1181	2477	2469
Standard	DIN 6537 K		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	92	93	93

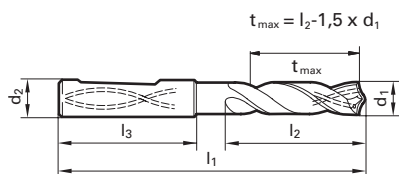

d1						Availability		
mm	inch	d2	l1	l2	l3			
13.200		14.000	107.00	60.00	45.00		●	
13.300		14.000	107.00	60.00	45.00		●	●
13.400		14.000	107.00	60.00	45.00			●
13.490	17/32	14.000	107.00	60.00	45.00		●	
13.500		14.000	107.00	60.00	45.00	○	●	●
13.550		14.000	107.00	60.00	45.00		●	●
13.700		14.000	107.00	60.00	45.00		●	●
13.800		14.000	107.00	60.00	45.00	○		
13.890	35/64	14.000	107.00	60.00	45.00	○	●	
13.900		14.000	107.00	60.00	45.00		●	
14.000		14.000	107.00	60.00	45.00	●	●	●
14.200		16.000	115.00	65.00	48.00		●	●
14.290	9/16	16.000	115.00	65.00	48.00		●	●
14.300		16.000	115.00	65.00	48.00	○	●	○
14.500		16.000	115.00	65.00	48.00	○	●	●
14.680	37/64	16.000	115.00	65.00	48.00	●	●	
14.700		16.000	115.00	65.00	48.00	○	●	●
14.800		16.000	115.00	65.00	48.00	●	●	●
14.900		16.000	115.00	65.00	48.00	●	●	
15.000		16.000	115.00	65.00	48.00		●	●
15.080	19/32	16.000	115.00	65.00	48.00		●	
15.100		16.000	115.00	65.00	48.00		●	●
15.200		16.000	115.00	65.00	48.00	●	●	●
15.300		16.000	115.00	65.00	48.00		●	●
15.480	39/64	16.000	115.00	65.00	48.00	○	●	
15.500		16.000	115.00	65.00	48.00	●	●	●
15.550		16.000	115.00	65.00	48.00		●	●
15.600		16.000	115.00	65.00	48.00			○
15.700		16.000	115.00	65.00	48.00		●	●
15.800		16.000	115.00	65.00	48.00		●	
15.870	5/8	16.000	115.00	65.00	48.00		●	
15.900		16.000	115.00	65.00	48.00		●	●
16.000		16.000	115.00	65.00	48.00		●	●
16.100		18.000	123.00	73.00	48.00	●	●	●
16.200		18.000	123.00	73.00	48.00	●		●
16.270	41/64	18.000	123.00	73.00	48.00		●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW



Availability						
○			●	●	●	●
●	●	●	●	●	●	●
			●	●	●	●
○	●	●	●	●	●	●
	○		●	●	●	●
	●	●	●	●	●	●
			●	●	●	●
●	●	●	●	●	●	●
			●	●	●	●
○	○	●	●	○	●	●
			●	●	●	●
	○					
	○	●	●	●	●	●


C TiCN	Cb Carbo	D Cristall	F FIRE/nanoFIRE	P AlCrN	S TiN	S+ TiN+	M MolyGlide	Y Signum
---------------	-----------------	-------------------	------------------------	----------------	--------------	----------------	--------------------	-----------------



Ratio drills with oil feed

Ratio drills

Guhring no.	1181	2477	2469
Standard	DIN 6537 K		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	92	93	93

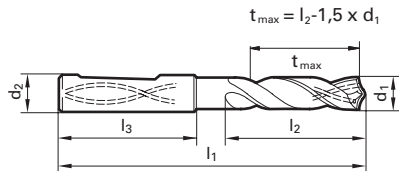

d1						Availability		
mm	inch	d2	mm	mm	mm			
16.300		18.000	123.00	73.00	48.00			
16.500		18.000	123.00	73.00	48.00	●	●	●
16.670	21/32	18.000	123.00	73.00	48.00		●	
16.700		18.000	123.00	73.00	48.00		●	
16.900		18.000	123.00	73.00	48.00		○	●
17.000		18.000	123.00	73.00	48.00	●	●	●
17.070	43/64	18.000	123.00	73.00	48.00		●	
17.300		18.000	123.00	73.00	48.00		●	●
17.460	11/16	18.000	123.00	73.00	48.00		●	
17.500		18.000	123.00	73.00	48.00	○	●	●
17.550		18.000	123.00	73.00	48.00			●
17.700		18.000	123.00	73.00	48.00	●		
17.860	45/64	18.000	123.00	73.00	48.00		●	
17.900		18.000	123.00	73.00	48.00		●	●
18.000		18.000	123.00	73.00	48.00	●	●	●
18.260	23/32	20.000	131.00	79.00	50.00		●	
18.300		20.000	131.00	79.00	50.00		●	●
18.500		20.000	131.00	79.00	50.00		●	●
18.700		20.000	131.00	79.00	50.00	●	●	
18.900		20.000	131.00	79.00	50.00		●	●
19.000		20.000	131.00	79.00	50.00	○	●	●
19.050	3/4	20.000	131.00	79.00	50.00	○	●	
19.250		20.000	131.00	79.00	50.00		●	
19.300		20.000	131.00	79.00	50.00			●
19.446		20.000	131.00	79.00	50.00		●	
19.450	49/64	20.000	131.00	79.00	50.00		●	
19.500		20.000	131.00	79.00	50.00	○	●	●
19.550		20.000	131.00	79.00	50.00			●
19.600		20.000	131.00	79.00	50.00			
19.700		20.000	131.00	79.00	50.00	○	●	
19.840	25/32	20.000	131.00	79.00	50.00		●	
19.900		20.000	131.00	79.00	50.00		●	●
20.000		20.000	131.00	79.00	50.00	●	●	●
20.500		25.000	146.00	84.00	56.00			
21.000		25.000	146.00	84.00	56.00			
21.500		25.000	146.00	84.00	56.00			

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW




Availability						
●	●	●	●	●	●	●
	●	●	●	○	●	●
			●	●	●	●
	○	●	●	●	●	●
○	●	○	●	●	●	●
	○		●	●	●	●
	●		●	●	●	●
			●	●	●	●
	○		●	○	●	●
○						
	●	●	●	●	●	●
●	●					
○	●					

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Gühring no.	1181	2477	2469
Standard	DIN 6537 K		
Tool material	Solid carbide		
Carbide grade	K/P		
Surface	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U
Drilling depth	3xD	3xD	3xD
Cutting direction	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7
Discount group	121	121	121
Techn. data page	92	93	93

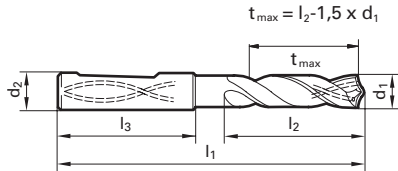

d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
22.000		25.000	146.00	84.00	56.00
22.500		25.000	153.00	91.00	56.00
23.000		25.000	153.00	91.00	56.00
24.000		25.000	153.00	91.00	56.00
25.000	63/64	25.000	153.00	91.00	56.00

Availability




1660	1180	2468	8510	8610	8520	8620
DIN 6537 K						
Solid carbide						
K/P						
S	S	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
3xD	3xD	3xD	3xD	3xD	3xD	3xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7
121	121	121	121	121	121	121
93	93	93	94	94	94	94
			NEW	NEW	NEW	NEW



Availability						
●						
	●					
	●					
	●					
	●					
	●					



Guhring no.	768	6068
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	4xD	4xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	94	95




d1						Availability	
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm		
3.000		6.000	66.00	24.00	36.00	●	●
3.100		6.000	66.00	24.00	36.00	●	●
3.200		6.000	66.00	24.00	36.00	●	●
3.300		6.000	66.00	24.00	36.00	●	○
3.400		6.000	66.00	24.00	36.00	●	●
3.500		6.000	66.00	24.00	36.00	●	●
3.600		6.000	66.00	24.00	36.00	●	●
3.700		6.000	66.00	24.00	36.00	●	○
3.800		6.000	74.00	30.00	36.00	●	●
3.900		6.000	74.00	30.00	36.00	○	○
4.000		6.000	74.00	30.00	36.00	●	●
4.100		6.000	74.00	30.00	36.00	●	●
4.200		6.000	74.00	30.00	36.00	●	○
4.300		6.000	74.00	30.00	36.00	●	●
4.400		6.000	74.00	30.00	36.00	●	●
4.500		6.000	74.00	30.00	36.00	●	●
4.600		6.000	74.00	30.00	36.00	●	●
4.800		6.000	74.00	36.00	36.00	●	●
4.900		6.000	74.00	36.00	36.00	●	●
5.000		6.000	74.00	36.00	36.00	●	●
5.100		6.000	74.00	36.00	36.00	●	●
5.160	13/64	6.000	74.00	36.00	36.00	●	○
5.200		6.000	74.00	36.00	36.00	●	●
5.300		6.000	74.00	36.00	36.00	●	○
5.400		6.000	74.00	36.00	36.00	●	○
5.500		6.000	74.00	36.00	36.00	●	●
5.560	7/32	6.000	74.00	36.00	36.00	●	●
5.600		6.000	74.00	36.00	36.00	●	●
5.700		6.000	74.00	36.00	36.00	●	●
5.800		6.000	74.00	36.00	36.00	●	○
5.900		6.000	74.00	36.00	36.00	●	●
6.000		6.000	74.00	36.00	36.00	●	○
6.100		8.000	91.00	53.00	36.00	●	●
6.200		8.000	91.00	53.00	36.00	●	●
6.300		8.000	91.00	53.00	36.00	●	●
6.350	1/4	8.000	91.00	53.00	36.00	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA




Guhring no.	768	6068
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	4xD	4xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	94	95



d1						Availability	
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm		
6.400		8.000	91.00	53.00	36.00	●	○
6.500		8.000	91.00	53.00	36.00	●	
6.600		8.000	91.00	53.00	36.00	●	
6.700		8.000	91.00	53.00	36.00	●	
6.750	17/64	8.000	91.00	53.00	36.00	●	●
6.800		8.000	91.00	53.00	36.00	●	●
6.900		8.000	91.00	53.00	36.00	●	●
7.000		8.000	91.00	53.00	36.00	●	●
7.100		8.000	91.00	53.00	36.00	●	○
7.140	9/32	8.000	91.00	53.00	36.00	●	●
7.200		8.000	91.00	53.00	36.00	●	
7.300		8.000	91.00	53.00	36.00	●	○
7.400		8.000	91.00	53.00	36.00	●	
7.500		8.000	91.00	53.00	36.00	●	
7.540	19/64	8.000	91.00	53.00	36.00	●	●
7.600		8.000	91.00	53.00	36.00	●	
7.700		8.000	91.00	53.00	36.00	●	
7.800		8.000	91.00	53.00	36.00	●	●
7.900		8.000	91.00	53.00	36.00	●	
7.940	5/16	8.000	91.00	53.00	36.00	●	
8.000		8.000	91.00	53.00	36.00	●	
8.100		10.000	103.00	61.00	40.00	●	●
8.200		10.000	103.00	61.00	40.00	●	●
8.300		10.000	103.00	61.00	40.00	●	●
8.330	21/64	10.000	103.00	61.00	40.00	●	
8.400		10.000	103.00	61.00	40.00	●	
8.500		10.000	103.00	61.00	40.00	●	●
8.600		10.000	103.00	61.00	40.00	●	
8.700		10.000	103.00	61.00	40.00	●	●
8.730	11/32	10.000	103.00	61.00	40.00	●	○
8.800		10.000	103.00	61.00	40.00	●	
8.900		10.000	103.00	61.00	40.00	●	
9.000		10.000	103.00	61.00	40.00	●	○
9.100		10.000	103.00	61.00	40.00	●	
9.130	23/64	10.000	103.00	61.00	40.00	●	●
9.200		10.000	103.00	61.00	40.00	●	●



Guhring no.	768	6068
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	4xD	4xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	94	95




d1						Availability	
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm		
9.300		10.000	103.00	61.00	40.00	●	●
9.400		10.000	103.00	61.00	40.00	●	
9.500		10.000	103.00	61.00	40.00	●	
9.520	3/8	10.000	103.00	61.00	40.00	●	●
9.600		10.000	103.00	61.00	40.00	●	●
9.700		10.000	103.00	61.00	40.00	●	○
9.800		10.000	103.00	61.00	40.00	●	
9.900		10.000	103.00	61.00	40.00	○	
9.920	25/64	10.000	103.00	61.00	40.00	●	●
10.000		10.000	103.00	61.00	40.00	●	●
10.200		12.000	118.00	71.00	45.00	●	●
10.320	13/32	12.000	118.00	71.00	45.00	●	
10.500		12.000	118.00	71.00	45.00	●	●
10.720	27/64	12.000	118.00	71.00	45.00	●	●
11.000		12.000	118.00	71.00	45.00	●	●
11.110	7/16	12.000	118.00	71.00	45.00	●	○
11.200		12.000	118.00	71.00	45.00	●	
11.500		12.000	118.00	71.00	45.00	●	○
11.510	29/64	12.000	118.00	71.00	45.00	●	
11.910	15/32	12.000	118.00	71.00	45.00	●	
12.000		12.000	118.00	71.00	45.00	●	●
12.300	31/64	14.000	124.00	74.00	45.00	●	○
12.500		14.000	124.00	74.00	45.00	●	○
12.700	1/2	14.000	124.00	74.00	45.00	●	●
13.000		14.000	124.00	74.00	45.00	●	●
13.500		14.000	124.00	74.00	45.00	●	○
14.000		14.000	124.00	74.00	45.00	●	●
14.500		16.000	133.00	83.00	48.00	●	
15.000		16.000	133.00	83.00	48.00	●	●
15.500		16.000	133.00	83.00	48.00	●	
16.000		16.000	133.00	83.00	48.00	●	●
16.500		18.000	143.00	93.00	48.00	●	○
17.000		18.000	143.00	93.00	48.00	●	●
17.500		18.000	143.00	93.00	48.00	●	●
18.000		18.000	143.00	93.00	48.00	●	○
18.500		20.000	153.00	101.00	50.00	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Guhring no.	768	6068
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	4xD	4xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	94	95




d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
19.000		20.000	153.00	101.00	50.00
19.500		20.000	153.00	101.00	50.00
20.000		20.000	153.00	101.00	50.00

Availability	
●	●
●	●



Guhring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

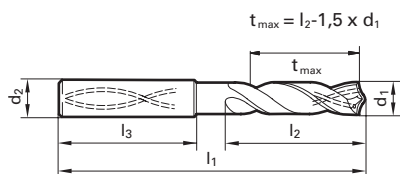

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm					
3.000		6.000	66.00	28.00	36.00	○		●	●	●
3.100		6.000	66.00	28.00	36.00			●	●	●
3.170	1/8	6.000	66.00	28.00	36.00			●	●	●
3.200		6.000	66.00	28.00	36.00			●	●	●
3.250		6.000	66.00	28.00	36.00			●	●	●
3.300		6.000	66.00	28.00	36.00			●	●	●
3.400		6.000	66.00	28.00	36.00			●	●	●
3.500		6.000	66.00	28.00	36.00			●	●	●
3.570	9/64	6.000	66.00	28.00	36.00			●	●	●
3.600		6.000	66.00	28.00	36.00			●	●	●
3.700		6.000	66.00	28.00	36.00	○	○	●	●	●
3.800		6.000	74.00	36.00	36.00			●	●	●
3.900		6.000	74.00	36.00	36.00			●	●	●
3.970	5/32	6.000	74.00	36.00	36.00			●	●	●
4.000		6.000	74.00	36.00	36.00	●	●	●	●	●
4.040		6.000	74.00	36.00	36.00			●	●	●
4.100		6.000	74.00	36.00	36.00			●	●	●
4.200		6.000	74.00	36.00	36.00			●	●	●
4.300		6.000	74.00	36.00	36.00	○	●	●	●	●
4.370	11/64	6.000	74.00	36.00	36.00			●	●	●
4.400		6.000	74.00	36.00	36.00			●	●	●
4.500		6.000	74.00	36.00	36.00	●	●	●	●	●
4.600		6.000	74.00	36.00	36.00		○	●	●	●
4.650		6.000	74.00	36.00	36.00	○	●	●	●	●
4.700		6.000	74.00	36.00	36.00	●	○	●	●	●
4.760	3/16	6.000	82.00	44.00	36.00			●	●	●
4.800		6.000	82.00	44.00	36.00	○	●	●	●	●
4.900		6.000	82.00	44.00	36.00		○	●	●	●
5.000		6.000	82.00	44.00	36.00	●	●	●	●	●
5.100		6.000	82.00	44.00	36.00		●	●	●	●
5.110		6.000	82.00	44.00	36.00			●	●	●
5.160	13/64	6.000	82.00	44.00	36.00		○	●	●	●
5.200		6.000	82.00	44.00	36.00		●	●	●	●
5.300		6.000	82.00	44.00	36.00		○	●	●	●
5.400		6.000	82.00	44.00	36.00	○	●	●	●	●
5.410		6.000	82.00	44.00	36.00			●	●	●

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown A TiAIN a TiAIN nanoA A TiAIN SuperA



1662	1182	2478	2470	6501	8511	8611	8521	8621
DIN 6537 L								
Solid carbide								
K/P								
S	S	F	F	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 F	RT 100 R	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7	m7	m7
121	121	121	121	165	121	121	121	121
96	96	96	96	96	97	97	97	97
					NEW	NEW	NEW	NEW




Availability									
●	●	○	●	●	●	●	●	●	●
○				●	●	●	●	●	●
●	●			●	●	●	●	●	●
○		●	○	●	●	●	●	●	●
○			○	●	●	●	○	●	●
○			○	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
○	●	●	●	●	●	●	●	●	●
○	●	●	●	●	●	●	●	●	●
○	○		○	●	●	●	●	●	●
○	●		○	●	●	●	●	●	●

C TiCN	Cb Carbo	D Cristall	F FIRE/nanoFIRE	P AlCrN	S TiN	S+ TiN+	M MolyGlide	Y Signum
---------------	-----------------	-------------------	------------------------	----------------	--------------	----------------	--------------------	-----------------



Gühring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

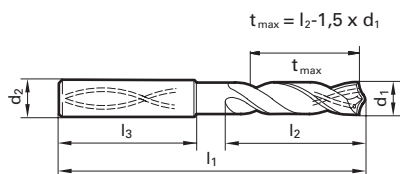

d1						Availability				
mm	inch	d2	l1	l2	l3					
5.500		6.000	82.00	44.00	36.00		●		●	●
5.550		6.000	82.00	44.00	36.00				●	●
5.560	7/32	6.000	82.00	44.00	36.00		●		●	●
5.600		6.000	82.00	44.00	36.00				●	●
5.650		6.000	82.00	44.00	36.00				●	●
5.700		6.000	82.00	44.00	36.00		●		●	●
5.800		6.000	82.00	44.00	36.00	○	●		●	●
5.900		6.000	82.00	44.00	36.00		●		●	●
5.950	15/64	6.000	82.00	44.00	36.00		●		●	●
6.000		6.000	82.00	44.00	36.00	●	●		●	●
6.100		8.000	91.00	53.00	36.00	○	●		●	●
6.200		8.000	91.00	53.00	36.00	○	●		●	●
6.300		8.000	91.00	53.00	36.00	○	●		●	●
6.350	1/4	8.000	91.00	53.00	36.00	●	●		●	●
6.400		8.000	91.00	53.00	36.00	○	●		●	●
6.500		8.000	91.00	53.00	36.00	●	●		●	●
6.530		8.000	91.00	53.00	36.00		●		●	●
6.600		8.000	91.00	53.00	36.00		●		●	●
6.700		8.000	91.00	53.00	36.00	○	●		●	●
6.750	17/64	8.000	91.00	53.00	36.00		○		●	●
6.800		8.000	91.00	53.00	36.00	○	●		●	●
6.900		8.000	91.00	53.00	36.00		●		●	●
7.000		8.000	91.00	53.00	36.00	●	●		●	●
7.100		8.000	91.00	53.00	36.00	●	●		●	●
7.140	9/32	8.000	91.00	53.00	36.00		●		●	●
7.200		8.000	91.00	53.00	36.00		●		●	●
7.300		8.000	91.00	53.00	36.00	●	●		●	●
7.400		8.000	91.00	53.00	36.00		●		●	●
7.500		8.000	91.00	53.00	36.00	●	○		●	●
7.540	19/64	8.000	91.00	53.00	36.00		●		●	●
7.550		8.000	91.00	53.00	36.00		●		●	●
7.600		8.000	91.00	53.00	36.00		●		●	●
7.650		8.000	91.00	53.00	36.00		●		●	●
7.700		8.000	91.00	53.00	36.00	●	●		●	●
7.800		8.000	91.00	53.00	36.00	●	●		●	●
7.900		8.000	91.00	53.00	36.00		○		●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



1662	1182	2478	2470	6501	8511	8611	8521	8621
DIN 6537 L								
Solid carbide								
K/P								
S	S	F	F	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 F	RT 100 R	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7	m7	m7
121	121	121	121	165	121	121	121	121
96	96	96	96	96	97	97	97	97
					NEW	NEW	NEW	NEW




Availability									
●	●	●	●	●	●	●	●	●	●
○				●	●	●	●	●	●
●	●		●	●	●	●	●	●	●
○				●	●	●	●	●	●
●	●		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
○	●		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	○	●	●	●	●	●
●	○		●	●	●	●	●	●	●
●	●	○	○	●	●	●	●	●	●
○	○	●	○	●	●	●	●	●	●
○	○		○	●	●	●	●	●	●
○	○		○	●	●	●	●	●	●

C TiCN	Cb Carbo	D Cristall	F FIRE/nanoFIRE	P AlCrN	S TiN	S+ TiN+	M MolyGlide	Y Signum
---------------	-----------------	-------------------	------------------------	----------------	--------------	----------------	--------------------	-----------------



Guhring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

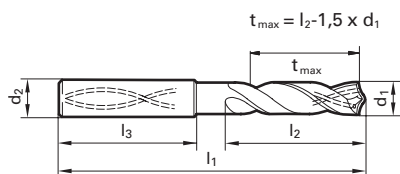


d1		d2	l1	l2	l3	Availability			
mm	inch	mm	mm	mm	mm				
7.940	5/16	8.000	91.00	53.00	36.00		●	●	●
8.000		8.000	91.00	53.00	36.00	●	●	●	●
8.100		10.000	103.00	61.00	40.00		●	●	●
8.200		10.000	103.00	61.00	40.00	○	●	●	●
8.300		10.000	103.00	61.00	40.00	●	●	●	●
8.330	21/64	10.000	103.00	61.00	40.00		●	●	●
8.400		10.000	103.00	61.00	40.00	○	●	●	●
8.500		10.000	103.00	61.00	40.00	●	●	●	●
8.600		10.000	103.00	61.00	40.00	○	●	●	●
8.700		10.000	103.00	61.00	40.00		●	●	●
8.730	11/32	10.000	103.00	61.00	40.00		●	●	●
8.800		10.000	103.00	61.00	40.00	●	●	●	●
8.900		10.000	103.00	61.00	40.00		●	●	●
9.000		10.000	103.00	61.00	40.00	●	●	●	●
9.100		10.000	103.00	61.00	40.00		●	●	●
9.130	23/64	10.000	103.00	61.00	40.00		○	●	●
9.200		10.000	103.00	61.00	40.00	○	●	●	●
9.250		10.000	103.00	61.00	40.00		●	●	●
9.300		10.000	103.00	61.00	40.00		●	●	●
9.340		10.000	103.00	61.00	40.00		●	●	●
9.400		10.000	103.00	61.00	40.00	○	●	●	●
9.500		10.000	103.00	61.00	40.00	○	●	●	●
9.520	3/8	10.000	103.00	61.00	40.00		●	●	●
9.550		10.000	103.00	61.00	40.00		●	●	●
9.600		10.000	103.00	61.00	40.00		○	●	●
9.700		10.000	103.00	61.00	40.00		●	●	●
9.800		10.000	103.00	61.00	40.00		○	●	●
9.900		10.000	103.00	61.00	40.00		○	●	●
9.920	25/64	10.000	103.00	61.00	40.00		●	●	●
10.000		10.000	103.00	61.00	40.00	○	●	●	●
10.100		12.000	118.00	71.00	45.00	●	●	●	●
10.200		12.000	118.00	71.00	45.00	●	●	●	●
10.300		12.000	118.00	71.00	45.00		●	●	●
10.320	13/32	12.000	118.00	71.00	45.00		●	●	●
10.400		12.000	118.00	71.00	45.00		●	●	●
10.500		12.000	118.00	71.00	45.00	●	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

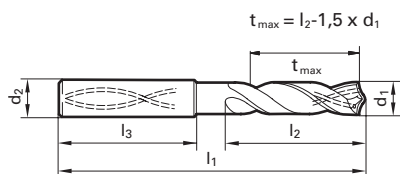

d1						Availability				
mm	inch	d2	l1	l2	l3					
10.600		12.000	118.00	71.00	45.00		●	●	●	
10.700		12.000	118.00	71.00	45.00		●	●	●	
10.720	27/64	12.000	118.00	71.00	45.00		●	○	●	
10.800		12.000	118.00	71.00	45.00		●	●	●	
10.900		12.000	118.00	71.00	45.00		●	●	●	
11.000		12.000	118.00	71.00	45.00	●	●	●	●	
11.100		12.000	118.00	71.00	45.00		●	●	●	
11.110	7/16	12.000	118.00	71.00	45.00		●	●	●	
11.200		12.000	118.00	71.00	45.00	○	●	●	●	
11.300		12.000	118.00	71.00	45.00	○	●	●	●	
11.400		12.000	118.00	71.00	45.00		○	●	●	
11.450		12.000	118.00	71.00	45.00		●	●	●	
11.500		12.000	118.00	71.00	45.00	○	●	●	●	
11.510	29/64	12.000	118.00	71.00	45.00		●	●	●	
11.600		12.000	118.00	71.00	45.00		●	●	●	
11.700		12.000	118.00	71.00	45.00		●	●	●	
11.800		12.000	118.00	71.00	45.00	○	●	●	●	
11.900		12.000	118.00	71.00	45.00		●	●	●	
11.910	15/32	12.000	118.00	71.00	45.00		●	●	●	
12.000		12.000	118.00	71.00	45.00	○	●	●	●	
12.100		14.000	124.00	77.00	45.00		●	●	●	
12.200		14.000	124.00	77.00	45.00		●	●	●	
12.300	31/64	14.000	124.00	77.00	45.00	○	●	●	●	
12.400		14.000	124.00	77.00	45.00		●	○	●	
12.500		14.000	124.00	77.00	45.00		●	●	●	
12.600		14.000	124.00	77.00	45.00		●	●	●	
12.700		14.000	124.00	77.00	45.00		●	●	●	●
12.800		14.000	124.00	77.00	45.00		●	●	●	
12.900		14.000	124.00	77.00	45.00		●	●	●	
13.000		14.000	124.00	77.00	45.00	●	●	●	●	
13.100	33/64	14.000	124.00	77.00	45.00		●	●	●	●
13.200		14.000	124.00	77.00	45.00		●	●	●	
13.300		14.000	124.00	77.00	45.00		●	●	●	
13.400		14.000	124.00	77.00	45.00		●	●	●	
13.490	17/32	14.000	124.00	77.00	45.00		●	●	●	
13.500		14.000	124.00	77.00	45.00		●	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



1662	1182	2478	2470	6501	8511	8611	8521	8621
DIN 6537 L								
Solid carbide								
K/P								
S	S	F	F	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 F	RT 100 R	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7	m7	m7
121	121	121	121	165	121	121	121	121
96	96	96	96	96	97	97	97	97
					NEW	NEW	NEW	NEW




Availability								
○	●			●	●	●	●	●
●	●		○	●	●	●	●	●
●	●	●	●	●	●	●	●	●
○	●	○	○	●	●	●	●	●
○		●	○	●	●	●	●	●
●	●		●	●	●	●	●	●
○	○		○	●	●	●	●	●
○	●	●	●	●	●	●	●	●
●	●		●	●	●	●	●	●
●	○		●	●	●	●	●	●
○	○	●	●	●	●	●	●	●
●	●			●	●	●	●	●
●	●			●	●	○	●	●
●	●			●	●	●	●	●
●	●			●	●	●	●	●
●	●			●	●	○	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Guhring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

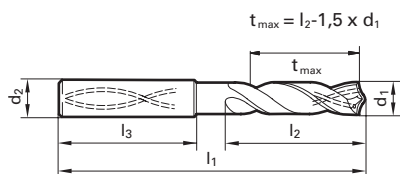

d1						Availability				
mm	inch	d2	l1	l2	l3					
13.600		14.000	124.00	77.00	45.00					
13.700		14.000	124.00	77.00	45.00					
13.800		14.000	124.00	77.00	45.00					
13.890	35/64	14.000	124.00	77.00	45.00					
13.900		14.000	124.00	77.00	45.00					
14.000		14.000	124.00	77.00	45.00					
14.100		16.000	133.00	83.00	48.00					
14.200		16.000	133.00	83.00	48.00					
14.290	9/16	16.000	133.00	83.00	48.00					
14.300		16.000	133.00	83.00	48.00					
14.400		16.000	133.00	83.00	48.00					
14.500		16.000	133.00	83.00	48.00					
14.600		16.000	133.00	83.00	48.00					
14.680	37/64	16.000	133.00	83.00	48.00					
14.700		16.000	133.00	83.00	48.00					
14.800		16.000	133.00	83.00	48.00					
14.900		16.000	133.00	83.00	48.00					
15.000		16.000	133.00	83.00	48.00					
15.080	19/32	16.000	133.00	83.00	48.00					
15.100		16.000	133.00	83.00	48.00					
15.200		16.000	133.00	83.00	48.00					
15.300		16.000	133.00	83.00	48.00					
15.400		16.000	133.00	83.00	48.00					
15.480	39/64	16.000	133.00	83.00	48.00					
15.500		16.000	133.00	83.00	48.00					
15.600		16.000	133.00	83.00	48.00					
15.700		16.000	133.00	83.00	48.00					
15.800		16.000	133.00	83.00	48.00					
15.870	5/8	16.000	133.00	83.00	48.00					
15.900		16.000	133.00	83.00	48.00					
16.000		16.000	133.00	83.00	48.00					
16.100		18.000	143.00	93.00	48.00					
16.200		18.000	143.00	93.00	48.00					
16.270	41/64	18.000	143.00	93.00	48.00					
16.300		18.000	143.00	93.00	48.00					
16.400		18.000	143.00	93.00	48.00					

○ bright
 ◐ steam tempered
 ◑ nitrided lands
 ● nitrided
 ● golden brown
 ● TiAIN
 ● TiAIN nanoA
 ● TiAIN SuperA



1662	1182	2478	2470	6501	8511	8611	8521	8621
DIN 6537 L								
Solid carbide								
K/P								
S	S	F	F	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 F	RT 100 R	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7	m7	m7
121	121	121	121	165	121	121	121	121
96	96	96	96	96	97	97	97	97
					NEW	NEW	NEW	NEW




Availability								
				●	●	●	●	●
	○			●				
●	●	●	●	●	●	●	●	●
	●		●	●	●	●	●	●
●	○	○	○	●	●	●	●	●
	○			●	●	○	●	●
●	●		●	●	●	●	●	●
				●	●	○	●	●
●	●	○		●	●	●	●	●
●	●		●	●	●	○	●	●
●	●	●	●	●	●	●	●	●
				●	●	●	●	●
					●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Guhring no.	1663	1183	2479	2471
Standard	DIN 6537 L			
Tool material	Solid carbide			
Carbide grade	K/P			
Surface	S	S	F	F
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 U
Drilling depth	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7
Discount group	121	121	121	121
Techn. data page	95	95	95	95

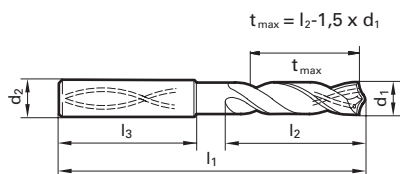

d1						Availability				
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm					
16.500		18.000	143.00	93.00	48.00					
16.600		18.000	143.00	93.00	48.00					
16.670	21/32	18.000	143.00	93.00	48.00					
16.700		18.000	143.00	93.00	48.00					
16.800		18.000	143.00	93.00	48.00					
16.900		18.000	143.00	93.00	48.00					
17.000		18.000	143.00	93.00	48.00					
17.070	43/64	18.000	143.00	93.00	48.00					
17.100		18.000	143.00	93.00	48.00					
17.200		18.000	143.00	93.00	48.00					
17.300		18.000	143.00	93.00	48.00					
17.400		18.000	143.00	93.00	48.00					
17.460	11/16	18.000	143.00	93.00	48.00					
17.500		18.000	143.00	93.00	48.00					
17.600		18.000	143.00	93.00	48.00					
17.700		18.000	143.00	93.00	48.00					
17.800		18.000	143.00	93.00	48.00					
17.860	45/64	18.000	143.00	93.00	48.00					
17.900		18.000	143.00	93.00	48.00					
18.000		18.000	143.00	93.00	48.00					
18.100		20.000	153.00	101.00	50.00					
18.200		20.000	153.00	101.00	50.00					
18.260	23/32	20.000	153.00	101.00	50.00					
18.300		20.000	153.00	101.00	50.00					
18.400		20.000	153.00	101.00	50.00					
18.500		20.000	153.00	101.00	50.00					
18.600		20.000	153.00	101.00	50.00					
18.650	47/64	20.000	153.00	101.00	50.00					
18.700		20.000	153.00	101.00	50.00					
18.800		20.000	153.00	101.00	50.00					
18.900		20.000	153.00	101.00	50.00					
19.000		20.000	153.00	101.00	50.00					
19.050	3/4	20.000	153.00	101.00	50.00					
19.100		20.000	153.00	101.00	50.00					
19.250		20.000	153.00	101.00	50.00					
19.300		20.000	153.00	101.00	50.00					

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



1662	1182	2478	2470	6501	8511	8611	8521	8621
DIN 6537 L								
Solid carbide								
K/P								
S	S	F	F	F	a	a	Y	Y
RT 100 F	RT 100 F	RT 100 F	RT 100 F	RT 100 R	RT 100 VA	RT 100 VA	RT 100 HF	RT 100 HF
5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD	5xD
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
m7	m7	m7	m7	m7	m7	m7	m7	m7
121	121	121	121	165	121	121	121	121
96	96	96	96	96	97	97	97	97
					NEW	NEW	NEW	NEW




Availability								
●	○		●	●	●	●	●	●
				●				
○	●	●	●	●	●	●	●	●
					●	●	●	●
●	●	●	●	●	●	●	●	●
○	●		●	●	●	●	●	●
				●	●	○	●	●
○				●	●	○	●	●
					●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Guhring no.	2711	4044	4045	6502	8522
Standard	Guhring std.				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 R	RT 100 HF
Drilling depth	7xD	7xD	7xD	7xD	7xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	165	121
Techn. data page	97	98	98	98	98

NEW

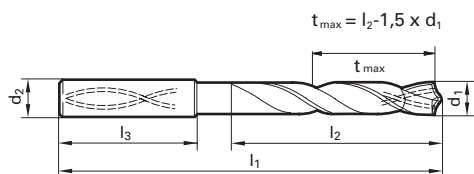


d1						Availability				
mm	inch	d2	l1	l2	l3	2711	4044	4045	6502	8522
3.000		6.000	70.00	30.00	36.00	●	●	●		●
3.100		6.000	70.00	30.00	36.00	●	●	●		●
3.170	1/8	6.000	70.00	30.00	36.00	●	●	●		●
3.200		6.000	70.00	30.00	36.00	●	●	●		●
3.250		6.000	70.00	30.00	36.00	●	●	●		●
3.300		6.000	70.00	30.00	36.00	●	●	●		●
3.400		6.000	75.00	35.50	36.00	●	●	●		●
3.500		6.000	75.00	35.50	36.00	●	●	●		●
3.570	9/64	6.000	75.00	35.50	36.00	●	●	●		●
3.600		6.000	75.00	35.50	36.00	●	●	●		●
3.700		6.000	75.00	35.50	36.00	●	●	●		●
3.800		6.000	75.00	37.50	36.00	●	●	●		●
3.900		6.000	75.00	37.50	36.00	●	●	●		●
3.970	5/32	6.000	75.00	37.50	36.00	●	●	●		●
4.000		6.000	75.00	37.50	36.00	●	●	●	●	●
4.040		6.000	75.00	37.50	36.00		●	●	●	●
4.100		6.000	75.00	37.50	36.00		●	●	●	●
4.200		6.000	75.00	37.50	36.00	○	●	●	●	●
4.300		6.000	85.00	45.00	36.00	●	●	●	●	●
4.370	11/64	6.000	85.00	45.00	36.00	●	●	●	●	●
4.400		6.000	85.00	45.00	36.00	●	●	●	●	●
4.500		6.000	85.00	45.00	36.00		●	●	●	●
4.600		6.000	85.00	45.00	36.00		●	●	●	●
4.650		6.000	85.00	45.00	36.00		●	●	●	●
4.700		6.000	85.00	45.00	36.00		●	●	●	●
4.760	3/16	6.000	90.00	50.00	36.00		●	●	●	●
4.800		6.000	90.00	50.00	36.00		●	●	●	●
4.900		6.000	90.00	50.00	36.00		●	●	●	●
5.000		6.000	90.00	50.00	36.00	●	●	●	●	●
5.100		6.000	90.00	50.00	36.00		●	●	●	●
5.110		6.000	90.00	50.00	36.00		●	●	●	●
5.160	13/64	6.000	90.00	50.00	36.00		●	●	●	●
5.200		6.000	90.00	50.00	36.00	●	●	●	●	●
5.300		6.000	90.00	50.00	36.00	●	●	●	●	●
5.400		6.000	97.00	57.00	36.00		●	●	●	
5.410		6.000	97.00	57.00	36.00		●	●	●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	2711	4044	4045	6502	8522
Standard	Guhring std.				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 R	RT 100 HF
Drilling depth	7xD	7xD	7xD	7xD	7xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	165	121
Techn. data page	97	98	98	98	98

NEW

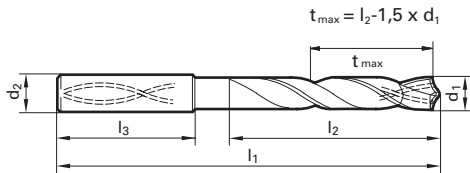


d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
5.500		6.000	97.00	57.00	36.00
5.550		6.000	97.00	57.00	36.00
5.560	7/32	6.000	97.00	57.00	36.00
5.600		6.000	97.00	57.00	36.00
5.700		6.000	97.00	57.00	36.00
5.800		6.000	97.00	57.00	36.00
5.900		6.000	97.00	57.00	36.00
5.950	15/64	6.000	97.00	57.00	36.00
6.000		6.000	97.00	57.00	36.00
6.100		8.000	106.00	66.00	36.00
6.200		8.000	106.00	66.00	36.00
6.300		8.000	106.00	66.00	36.00
6.350	1/4	8.000	106.00	66.00	36.00
6.400		8.000	106.00	66.00	36.00
6.500		8.000	106.00	66.00	36.00
6.530		8.000	106.00	66.00	36.00
6.600		8.000	106.00	66.00	36.00
6.700		8.000	106.00	66.00	36.00
6.750	17/64	8.000	106.00	66.00	36.00
6.800		8.000	106.00	66.00	36.00
6.900		8.000	116.00	76.00	36.00
7.000		8.000	116.00	76.00	36.00
7.100		8.000	116.00	76.00	36.00
7.140	9/32	8.000	116.00	76.00	36.00
7.200		8.000	116.00	76.00	36.00
7.300		8.000	116.00	76.00	36.00
7.400		8.000	116.00	76.00	36.00
7.500		8.000	116.00	76.00	36.00
7.540	19/64	8.000	116.00	76.00	36.00
7.600		8.000	116.00	76.00	36.00
7.700		8.000	116.00	76.00	36.00
7.800		8.000	116.00	76.00	36.00
7.900		8.000	116.00	76.00	36.00
7.940	5/16	8.000	116.00	76.00	36.00
8.000		8.000	116.00	76.00	36.00
8.100		10.000	131.00	87.00	40.00

Availability				
●	●	●	●	●
●	●		●	●
●	●	●	●	
●	●	●	●	
●	●	●	●	●
●	●	●	●	
●	●	●	●	
●	●	●	●	
●	●	●	●	●
●	●	●	●	●
●	●	●	●	
●	●	●	●	
○	●	●	●	●
●	●	●	●	
●	●	●	●	
●	●	●	●	●
○	●	●	●	●
●	●	●	●	
●	●	●	●	●
●	●	●	●	
●	●	●	●	●



Guhring no.	2711	4044	4045	6502	8522
Standard	Guhring std.				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 R	RT 100 HF
Drilling depth	7xD	7xD	7xD	7xD	7xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	165	121
Techn. data page	97	98	98	98	98

NEW

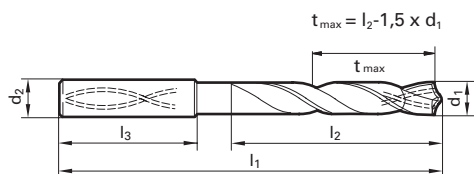


d1						Availability				
mm	inch	d2	l1	l2	l3	2711	4044	4045	6502	8522
8.200		10.000	131.00	87.00	40.00	●	●	●	●	
8.300		10.000	131.00	87.00	40.00		●		●	
8.330	21/64	10.000	131.00	87.00	40.00		●		●	
8.400		10.000	131.00	87.00	40.00		●	●	●	
8.500		10.000	131.00	87.00	40.00	●	●	●	●	●
8.600		10.000	131.00	87.00	40.00	○	●	●	●	●
8.700		10.000	131.00	87.00	40.00	●	●	●	●	
8.730	11/32	10.000	131.00	87.00	40.00		●		●	
8.800		10.000	131.00	87.00	40.00	○	●	●	●	●
8.900		10.000	131.00	87.00	40.00		●	●	●	
9.000		10.000	131.00	87.00	40.00	●	●	●	●	●
9.100		10.000	139.00	95.00	40.00	○	●	●	●	●
9.130	23/64	10.000	139.00	95.00	40.00		○		●	
9.200		10.000	139.00	95.00	40.00	○	●	●	●	
9.250		10.000	139.00	95.00	40.00		●	●	●	●
9.300		10.000	139.00	95.00	40.00	●	●	●	●	
9.340		10.000	139.00	95.00	40.00		●		●	
9.400		10.000	139.00	95.00	40.00		●	●	●	●
9.500		10.000	139.00	95.00	40.00	○	●	●	●	●
9.520	3/8	10.000	139.00	95.00	40.00		●		●	
9.600		10.000	139.00	95.00	40.00	●	●	●	●	●
9.700		10.000	139.00	95.00	40.00	○	●	●	●	●
9.800		10.000	139.00	95.00	40.00	●	●	●	●	●
9.900		10.000	139.00	95.00	40.00		●	●	●	●
9.920	25/64	10.000	139.00	95.00	40.00		●		●	
10.000		10.000	139.00	95.00	40.00	●	●	●	●	●
10.100		12.000	155.00	106.00	45.00		●		●	
10.200		12.000	155.00	106.00	45.00	○	●	●	●	●
10.300		12.000	155.00	106.00	45.00		●	●	●	●
10.320	13/32	12.000	155.00	106.00	45.00		●		●	
10.400		12.000	155.00	106.00	45.00		●		●	●
10.500		12.000	155.00	106.00	45.00	●	●	●	●	●
10.600		12.000	155.00	106.00	45.00		●		●	
10.700		12.000	155.00	106.00	45.00		●		●	
10.720	27/64	12.000	155.00	106.00	45.00		●		●	
10.800		12.000	155.00	106.00	45.00		●	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAN ● a TiAN nanoA ● A TiAN SuperA



Guhring no.	2711	4044	4045	6502	8522
Standard	Guhring std.				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 R	RT 100 HF
Drilling depth	7xD	7xD	7xD	7xD	7xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	165	121
Techn. data page	97	98	98	98	98

NEW

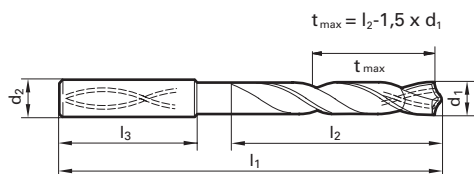


d1						Availability				
mm	inch	d2	l1	l2	l3	2711	4044	4045	6502	8522
10.900		12.000	155.00	106.00	45.00		●	●	●	●
11.000		12.000	155.00	106.00	45.00	●	●	●	●	●
11.100		12.000	163.00	114.00	45.00		●	●	●	●
11.110	7/16	12.000	163.00	114.00	45.00		●	●	●	●
11.200		12.000	163.00	114.00	45.00		●	●	●	●
11.300		12.000	163.00	114.00	45.00		●	●	●	●
11.400		12.000	163.00	114.00	45.00		●	●	●	●
11.500		12.000	163.00	114.00	45.00	○	●	●	●	●
11.510	29/64	12.000	163.00	114.00	45.00		●	●	●	●
11.600		12.000	163.00	114.00	45.00		●	●	●	●
11.700		12.000	163.00	114.00	45.00		●	●	●	●
11.800		12.000	163.00	114.00	45.00		●	●	●	●
11.900		12.000	163.00	114.00	45.00		●	●	●	●
11.910	15/32	12.000	163.00	114.00	45.00		●	●	●	●
12.000		12.000	163.00	114.00	45.00	○	●	●	●	●
12.100		14.000	182.00	133.00	45.00		●	●	●	●
12.200		14.000	182.00	133.00	45.00	●	●	●	●	●
12.300	31/64	14.000	182.00	133.00	45.00		○	●	●	●
12.400		14.000	182.00	133.00	45.00		●	●	●	●
12.500		14.000	182.00	133.00	45.00	●	●	●	●	●
12.600		14.000	182.00	133.00	45.00		●	●	●	●
12.700	1/2	14.000	182.00	133.00	45.00		●	●	●	●
12.800		14.000	182.00	133.00	45.00		●	●	●	●
12.900		14.000	182.00	133.00	45.00		●	●	●	●
13.000		14.000	182.00	133.00	45.00	●	●	●	●	●
13.100	33/64	14.000	182.00	133.00	45.00		●	●	●	●
13.300		14.000	182.00	133.00	45.00		●	●	●	●
13.400		14.000	182.00	133.00	45.00		●	●	●	●
13.490	17/32	14.000	182.00	133.00	45.00		●	●	●	●
13.500		14.000	182.00	133.00	45.00	○	●	●	●	●
13.700		14.000	182.00	133.00	45.00		●	●	●	●
13.800		14.000	182.00	133.00	45.00	●	●	●	●	●
13.890	35/64	14.000	182.00	133.00	45.00		●	●	●	●
13.900		14.000	182.00	133.00	45.00		●	●	●	●
14.000		14.000	182.00	133.00	45.00	●	●	●	●	●
14.100		16.000	204.00	152.00	48.00		○	●	●	●



Guhring no.	2711	4044	4045	6502	8522
Standard	Guhring std.				
Tool material	Solid carbide				
Carbide grade	K/P				
Surface	S	F	F	F	Y
Type	RT 100 U	RT 100 U	RT 100 U	RT 100 R	RT 100 HF
Drilling depth	7xD	7xD	7xD	7xD	7xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	m7	m7	m7	m7	m7
Discount group	121	121	121	165	121
Techn. data page	97	98	98	98	98

NEW

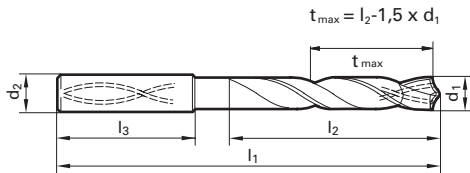


d1						Availability				
mm	inch	d2	l1	l2	l3					
14.200		16.000	204.00	152.00	48.00		●	●	●	
14.290	9/16	16.000	204.00	152.00	48.00		●		●	
14.300		16.000	204.00	152.00	48.00				●	
14.400		16.000	204.00	152.00	48.00				●	
14.500		16.000	204.00	152.00	48.00		●	●		●
14.600		16.000	204.00	152.00	48.00				●	
14.700		16.000	204.00	152.00	48.00				●	
14.900		16.000	204.00	152.00	48.00				●	
15.000		16.000	204.00	152.00	48.00				●	
15.100		16.000	204.00	152.00	48.00	●		●		●
15.200		16.000	204.00	152.00	48.00	●			●	
15.300		16.000	204.00	152.00	48.00				●	
15.400		16.000	204.00	152.00	48.00				●	
15.480	39/64	16.000	204.00	152.00	48.00		●			
15.500		16.000	204.00	152.00	48.00	○	●	●		●
15.600		16.000	204.00	152.00	48.00				●	
15.700		16.000	204.00	152.00	48.00				●	
15.800		16.000	204.00	152.00	48.00	●			●	
15.870	5/8	16.000	204.00	152.00	48.00			○		
15.900		16.000	204.00	152.00	48.00				●	
16.000		16.000	204.00	152.00	48.00	●	●	●		●
16.500		18.000	223.00	171.00	48.00	●	●	●		
16.670	21/32	18.000	223.00	171.00	48.00				●	
16.900		18.000	223.00	171.00	48.00		●			
17.000		18.000	223.00	171.00	48.00	●	●	●	●	
17.500		18.000	223.00	171.00	48.00	○	●	●	●	
18.000		18.000	223.00	171.00	48.00	●	●	●	●	
18.500		20.000	244.00	190.00	50.00	○	●	●	●	
18.900		20.000	244.00	190.00	50.00		●			
19.000		20.000	244.00	190.00	50.00		●	●	●	
19.050	3/4	20.000	244.00	190.00	50.00		●	●		
19.500		20.000	244.00	190.00	50.00	○	●	●	●	
20.000		20.000	244.00	190.00	50.00		●	●	●	

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA




Guhring no.	769	6069
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	7xD	7xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	98	99



d1						Availability	
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm		
3.000		6.000	74.00	32.00	36.00	●	●
3.100		6.000	74.00	32.00	36.00	●	
3.200		6.000	74.00	32.00	36.00	●	
3.300		6.000	74.00	32.00	36.00	●	○
3.400		6.000	74.00	34.00	36.00	●	
3.500		6.000	74.00	34.00	36.00	●	●
3.600		6.000	74.00	34.00	36.00	●	○
3.700		6.000	74.00	34.00	36.00	●	
3.800		6.000	97.00	45.00	36.00	●	○
3.900		6.000	97.00	45.00	36.00	●	●
4.000		6.000	97.00	45.00	36.00	●	○
4.100		6.000	97.00	45.00	36.00	●	
4.200		6.000	97.00	45.00	36.00	●	●
4.300		6.000	97.00	45.00	36.00	●	○
4.400		6.000	97.00	45.00	36.00	●	●
4.500		6.000	97.00	45.00	36.00	●	●
4.700		6.000	97.00	45.00	36.00	●	
4.800		6.000	97.00	57.00	36.00	●	
4.900		6.000	97.00	57.00	36.00	●	
5.000		6.000	97.00	57.00	36.00	●	●
5.160	13/64	6.000	97.00	57.00	36.00	○	○
5.500		6.000	97.00	57.00	36.00	●	●
6.000		6.000	97.00	57.00	36.00	●	●
6.350	1/4	8.000	116.00	76.00	36.00	○	
6.500		8.000	116.00	76.00	36.00	●	●
6.800		8.000	116.00	76.00	36.00	●	●
7.000		8.000	116.00	76.00	36.00	●	●
7.140	9/32	8.000	116.00	76.00	36.00	○	●
7.500		8.000	116.00	76.00	36.00	●	
7.800		8.000	116.00	76.00	36.00	●	●
7.940	5/16	8.000	116.00	76.00	36.00	●	
8.000		8.000	116.00	76.00	36.00	●	●
8.330	21/64	10.000	139.00	95.00	40.00	●	●
8.500		10.000	139.00	95.00	40.00	●	●
8.730	11/32	10.000	139.00	95.00	40.00	●	●
9.000		10.000	139.00	95.00	40.00	●	●



Gühring no.	769	6069
Standard	Gühring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	7xD	7xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	98	99





d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
9.130	23/64	10.000	139.00	95.00	40.00
9.500		10.000	139.00	95.00	40.00
9.520	3/8	10.000	139.00	95.00	40.00
10.000		10.000	139.00	95.00	40.00
10.200		12.000	163.00	114.00	45.00
10.320	13/32	12.000	163.00	114.00	45.00
10.500		12.000	163.00	114.00	45.00
10.720	27/64	12.000	163.00	114.00	45.00
11.000		12.000	163.00	114.00	45.00
11.110	7/16	12.000	163.00	114.00	45.00
11.500		12.000	163.00	114.00	45.00
11.510	29/64	12.000	163.00	114.00	45.00
12.000		12.000	163.00	114.00	45.00
12.300	31/64	14.000	182.00	133.00	45.00
12.500		14.000	182.00	133.00	45.00
12.700	1/2	14.000	182.00	133.00	45.00
13.000		14.000	182.00	133.00	45.00
13.500		14.000	182.00	133.00	45.00
14.000		14.000	182.00	133.00	45.00
14.500		16.000	204.00	152.00	48.00
15.000		16.000	204.00	152.00	48.00
15.500		16.000	204.00	152.00	48.00
16.000		16.000	204.00	152.00	48.00
16.500		18.000	223.00	171.00	48.00
17.000		18.000	223.00	171.00	48.00
17.500		18.000	223.00	171.00	48.00
18.000		18.000	223.00	171.00	48.00
18.500		20.000	244.00	190.00	50.00
19.000		20.000	244.00	190.00	50.00
19.500		20.000	244.00	190.00	50.00
20.000		20.000	244.00	190.00	50.00

Availability	
○	●
●	●
●	●
●	●
●	●
●	●
●	○
●	●
●	●
●	●
●	○
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
○	●
●	○
●	○

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA





Guhring no.	770	6070
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	10xD	10xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	99	99

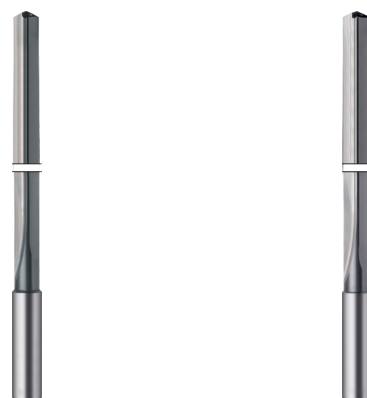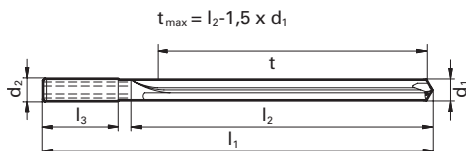

Dimensions						Availability	
d1		d2	l1	l2	l3		
mm	inch	mm	mm	mm	mm		
3.000		6.000	91.00	42.00	36.00	●	●
3.100		6.000	91.00	42.00	36.00	●	○
3.300		6.000	91.00	42.00	36.00	●	●
3.500		6.000	91.00	48.00	36.00	●	●
3.600		6.000	91.00	48.00	36.00	●	●
3.700		6.000	91.00	48.00	36.00	●	●
3.800		6.000	121.00	77.00	36.00	●	○
3.900		6.000	121.00	77.00	36.00	●	●
4.000		6.000	121.00	77.00	36.00	●	●
4.100		6.000	121.00	77.00	36.00	●	●
4.200		6.000	121.00	77.00	36.00	●	●
4.300		6.000	121.00	77.00	36.00	●	●
4.400		6.000	121.00	77.00	36.00	●	●
4.500		6.000	121.00	77.00	36.00	●	●
4.600		6.000	121.00	77.00	36.00	●	●
4.700		6.000	121.00	77.00	36.00	○	●
4.800		6.000	121.00	82.00	36.00	●	●
4.900		6.000	121.00	82.00	36.00	●	○
5.000		6.000	121.00	82.00	36.00	●	●
5.160	13/64	6.000	121.00	82.00	36.00	●	●
5.500		6.000	121.00	82.00	36.00	●	●
5.560	7/32	6.000	121.00	82.00	36.00	●	●
6.000		6.000	121.00	82.00	36.00	●	●
6.350	1/4	8.000	146.00	106.00	36.00	●	●
6.500		8.000	146.00	106.00	36.00	●	○
6.750	17/64	8.000	146.00	106.00	36.00	○	●
6.800		8.000	146.00	106.00	36.00	●	●
7.000		8.000	146.00	106.00	36.00	●	○
7.140	9/32	8.000	146.00	106.00	36.00	●	●
7.500		8.000	146.00	106.00	36.00	●	●
7.800		8.000	146.00	106.00	36.00	●	●
7.940	5/16	8.000	146.00	106.00	36.00	●	●
8.000		8.000	146.00	106.00	36.00	●	●
8.330	21/64	10.000	175.00	130.00	40.00	●	●
8.500		10.000	175.00	130.00	40.00	●	●
8.730	11/32	10.000	175.00	130.00	40.00	●	●



Guhring no.	770	6070
Standard	Guhring std.	
Tool material	Solid carbide	
Carbide grade	K	
Surface	○	○
Type	RT 150 GG	RT 150 GG
Drilling depth	10xD	10xD
Cutting direction	right-hand	right-hand
Tolerance	m7	m7
Discount group	121	121
Techn. data page	99	99

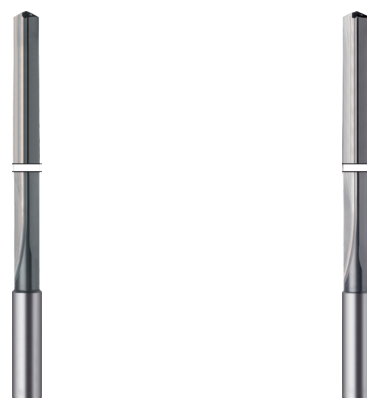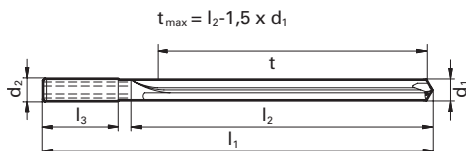

Dimensions						Availability	
d1		d2	l1	l2	l3		
mm	inch	mm	mm	mm	mm		
9.000		10.000	175.00	130.00	40.00	●	●
9.130	23/64	10.000	175.00	130.00	40.00		●
9.500		10.000	175.00	130.00	40.00	●	○
9.520	3/8	10.000	175.00	130.00	40.00	●	
10.000		10.000	175.00	130.00	40.00	●	
10.200		12.000	209.00	159.00	45.00	●	
10.320	13/32	12.000	209.00	159.00	45.00		●
10.500		12.000	209.00	159.00	45.00	●	●
10.720	27/64	12.000	209.00	159.00	45.00	●	
11.000		12.000	209.00	159.00	45.00	●	●
11.110	7/16	12.000	209.00	159.00	45.00	●	●
11.500		12.000	209.00	159.00	45.00	●	
11.510	29/64	12.000	209.00	159.00	45.00	○	●
12.000		12.000	209.00	159.00	45.00	●	●
12.300		14.000	233.00	183.00	45.00	●	●
12.500		14.000	233.00	183.00	45.00	●	
12.700		14.000	233.00	183.00	45.00	●	○
13.000		14.000	233.00	183.00	45.00	●	●
13.500		14.000	233.00	183.00	45.00	●	
14.000		14.000	233.00	183.00	45.00	●	●
14.500		16.000	260.00	207.00	48.00	●	
15.000		16.000	260.00	207.00	48.00	●	●
15.500		16.000	260.00	207.00	48.00	●	●
16.000		16.000	260.00	207.00	48.00	●	●
16.500		18.000	284.00	231.00	48.00	○	
17.000		18.000	284.00	231.00	48.00	●	
17.500		18.000	284.00	231.00	48.00	●	●
18.000		18.000	284.00	231.00	48.00	●	○
18.500		20.000	308.00	255.00	50.00	○	●
19.000		20.000	308.00	255.00	50.00	●	
19.500		20.000	308.00	255.00	50.00		○
20.000		20.000	308.00	255.00	50.00	●	


○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Ratio drills

Guhring no.	6509
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	15xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	99

NEW

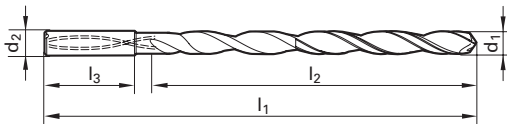


d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
11.000		12.000	247.00	198.00	45.00
11.110	7/16	12.000	263.00	214.00	45.00
11.510	29/64	12.000	263.00	214.00	45.00
11.910	15/32	12.000	263.00	214.00	45.00
12.000		12.000	263.00	214.00	45.00
12.300	31/64	14.000	297.00	248.00	45.00
12.700	1/2	14.000	297.00	248.00	45.00
13.100	33/64	14.000	297.00	248.00	45.00
13.490	17/32	14.000	297.00	248.00	45.00
13.890	35/64	14.000	297.00	248.00	45.00
14.000		14.000	297.00	248.00	45.00

Availability	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	




Guhring no.	6511
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	20xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	100

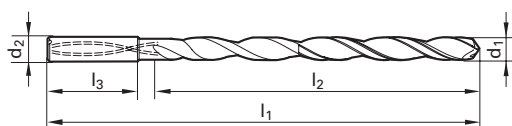

d1						Availability
mm	inch	d2	l1	l2	l3	
11.000		12.000	302.00	253.00	45.00	●
11.110		12.000	323.00	274.00	45.00	●
11.510		12.000	323.00	274.00	45.00	●
11.910		12.000	323.00	274.00	45.00	●
12.000		12.000	323.00	274.00	45.00	●
12.300	31/64	14.000	367.00	318.00	45.00	●
12.700		14.000	367.00	318.00	45.00	●
13.100	33/64	14.000	367.00	318.00	45.00	●
13.490	17/32	14.000	367.00	318.00	45.00	●
13.890	35/64	14.000	367.00	318.00	45.00	●
14.000		14.000	367.00	318.00	45.00	●



Guhring no.	6512
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	25xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	100

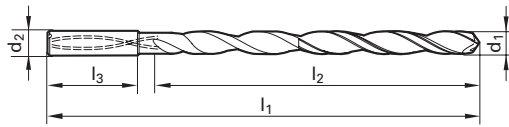


Dimensions						Availability
d1	d2	l1	l2	l3		
mm	inch	mm	mm	mm	mm	
3.000		6.000	125.00	85.00	36.00	●
3.170	1/8	6.000	141.00	101.00	36.00	●
3.500		6.000	156.00	116.00	36.00	●
3.570		6.000	156.00	116.00	36.00	●
3.970	5/32	6.000	156.00	116.00	36.00	●
4.000		6.000	156.00	116.00	36.00	●
4.370		6.000	183.00	143.00	36.00	●
4.500		6.000	183.00	143.00	36.00	●
4.760	3/16	6.000	183.00	143.00	36.00	●
5.000		6.000	183.00	143.00	36.00	●
5.100		6.000	210.00	170.00	36.00	●
5.160		6.000	210.00	170.00	36.00	●
5.410		6.000	210.00	170.00	36.00	●
5.500		6.000	210.00	170.00	36.00	●
5.560	7/32	6.000	210.00	170.00	36.00	●
5.950		6.000	210.00	170.00	36.00	●
6.000		6.000	210.00	170.00	36.00	●
6.350	1/4	8.000	237.00	197.00	36.00	●
6.500		8.000	237.00	197.00	36.00	●
6.750		8.000	237.00	197.00	36.00	●
7.000		8.000	237.00	197.00	36.00	●
7.140	9/32	8.000	263.00	223.00	36.00	●
7.500		8.000	263.00	223.00	36.00	●
7.540		8.000	263.00	223.00	36.00	●
7.940		8.000	263.00	223.00	36.00	●
8.000		8.000	263.00	223.00	36.00	●
8.330		10.000	294.00	250.00	40.00	●
8.500		10.000	294.00	250.00	40.00	●
8.730		10.000	294.00	250.00	40.00	●
9.000		10.000	294.00	250.00	40.00	●
9.130		10.000	321.00	277.00	40.00	●
9.520		10.000	321.00	277.00	40.00	●
9.920	25/64	10.000	321.00	277.00	40.00	●
10.000		10.000	321.00	277.00	40.00	●
10.320	13/32	12.000	359.00	310.00	45.00	●
10.720		12.000	359.00	310.00	40.00	●

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAIN a TiAIN nanoA A TiAIN SuperA




Guhring no.	6512
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	25xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	100



d1						Availability
mm	inch	d2	l1	l2	l3	
11.000		12.000	359.00	310.00	45.00	●
11.110		12.000	386.00	337.00	40.00	●
11.510	29/64	12.000	386.00	337.00	45.00	●
11.910	15/32	12.000	386.00	337.00	45.00	●
12.000		12.000	386.00	337.00	45.00	●



Guhring no.	6513
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	30xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	100

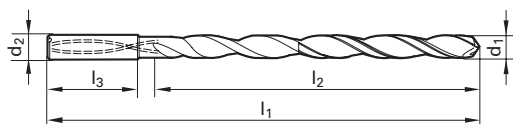


d1						Availability
mm	inch	d2	l1	l2	l3	
3.000		6.000	140.00	100.00	36.00	●
3.170	1/8	6.000	158.00	118.00	36.00	●
3.500		6.000	176.00	136.00	36.00	●
3.570		6.000	176.00	136.00	36.00	●
3.970	5/32	6.000	176.00	136.00	36.00	●
4.000		6.000	176.00	136.00	36.00	●
4.370		6.000	208.00	168.00	36.00	●
4.500		6.000	208.00	168.00	36.00	●
4.760	3/16	6.000	208.00	168.00	36.00	●
5.000		6.000	208.00	168.00	36.00	●
5.100		6.000	240.00	200.00	36.00	●
5.160		6.000	240.00	200.00	36.00	●
5.410		6.000	240.00	200.00	36.00	●
5.500		6.000	240.00	200.00	36.00	●
5.560	7/32	6.000	240.00	200.00	36.00	●
5.950		6.000	240.00	200.00	36.00	●
6.000		6.000	240.00	200.00	36.00	●
6.350	1/4	8.000	272.00	232.00	36.00	●
6.500		8.000	272.00	232.00	36.00	●
6.750		8.000	272.00	232.00	36.00	●
7.000		8.000	272.00	232.00	36.00	●
7.140	9/32	8.000	303.00	263.00	36.00	●
7.500		8.000	303.00	263.00	36.00	●
7.540		8.000	303.00	263.00	36.00	●
7.940		8.000	303.00	263.00	36.00	●
8.000		8.000	303.00	263.00	36.00	●
8.330		10.000	339.00	295.00	40.00	●
8.500		10.000	339.00	295.00	40.00	●
8.730		10.000	339.00	295.00	40.00	●
9.000		10.000	339.00	295.00	40.00	●
9.130		10.000	371.00	327.00	40.00	●
9.520		10.000	371.00	327.00	40.00	●
9.920	25/64	10.000	371.00	327.00	40.00	●
10.000		10.000	371.00	327.00	40.00	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Guhring no.	6514
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	A
Type	RT 100 T
Drilling depth	40xD
Cutting direction	right-hand
Tolerance	h7
Discount group	165
Techn. data page	100


NEW



d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
3.000		6.000	170.00	130.00	36.00	●
3.170	1/8	6.000	196.00	156.00	36.00	●
3.500		6.000	196.00	156.00	36.00	●
3.570	9/64	6.000	216.00	176.00	36.00	●
3.970	5/32	6.000	216.00	176.00	36.00	●
4.000		6.000	216.00	176.00	36.00	●
4.370	11/64	6.000	238.00	198.00	36.00	●
4.500		6.000	238.00	198.00	36.00	●
4.760	3/16	6.000	258.00	218.00	36.00	●
5.000		6.000	258.00	218.00	36.00	●
5.100		6.000	280.00	240.00	36.00	●
5.160	13/64	6.000	280.00	240.00	36.00	●
5.410		6.000	280.00	240.00	36.00	●
5.500		6.000	280.00	240.00	36.00	●
5.560	7/32	6.000	300.00	260.00	36.00	●
5.950	15/64	6.000	300.00	260.00	36.00	●
6.000		6.000	300.00	260.00	36.00	●
6.350	1/4	8.000	322.00	282.00	36.00	●
6.500		8.000	322.00	282.00	36.00	●
6.750	17/64	8.000	342.00	302.00	36.00	●
7.000		8.000	342.00	302.00	36.00	●
7.140	9/32	8.000	363.00	323.00	36.00	●
7.500		8.000	363.00	323.00	36.00	●
7.540	19/64	8.000	383.00	343.00	36.00	●
7.940	5/16	8.000	383.00	343.00	36.00	●
8.000		8.000	383.00	343.00	36.00	●



Guhring no.	1171
Standard	DIN 6538 K
Tool material	Carbide
Carbide grade	P
Surface	(S)
Type	RT 80 U
Drilling depth	3xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	100




d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
9.500		16.000	103.00	51.00	48.00
9.700		16.000	103.00	51.00	48.00
9.800		16.000	103.00	51.00	48.00
9.900		16.000	103.00	51.00	48.00
10.000		16.000	103.00	51.00	48.00
10.100		16.000	103.00	51.00	48.00
10.200		16.000	103.00	51.00	48.00
10.400		16.000	103.00	51.00	48.00
10.500		16.000	103.00	51.00	48.00
10.600		16.000	103.00	51.00	48.00
10.700		16.000	103.00	51.00	48.00
10.800		16.000	103.00	51.00	48.00
10.900		16.000	103.00	51.00	48.00
11.000		16.000	103.00	51.00	48.00
11.100		16.000	103.00	51.00	48.00
11.200		16.000	103.00	51.00	48.00
11.400		16.000	103.00	51.00	48.00
11.500		16.000	103.00	51.00	48.00
11.600		16.000	103.00	51.00	48.00
11.700		16.000	103.00	51.00	48.00
11.800		16.000	103.00	51.00	48.00
12.000		16.000	103.00	51.00	48.00
12.100		16.000	111.00	59.00	48.00
12.200		16.000	111.00	59.00	48.00
12.300	31/64	16.000	111.00	59.00	48.00
12.400		16.000	111.00	59.00	48.00
12.500		16.000	111.00	59.00	48.00
12.600		16.000	111.00	59.00	48.00
12.700	1/2	16.000	111.00	59.00	48.00
13.000		16.000	111.00	59.00	48.00
13.500		16.000	111.00	59.00	48.00
13.700		16.000	111.00	59.00	48.00
13.800		16.000	111.00	59.00	48.00
14.000		16.000	111.00	59.00	48.00
14.200		20.000	122.00	68.00	50.00
14.400		20.000	122.00	68.00	50.00

Availability	
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input checked="" type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input checked="" type="radio"/>
	<input checked="" type="radio"/>
	<input checked="" type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input checked="" type="radio"/>
	<input checked="" type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input checked="" type="radio"/>
	<input type="radio"/>
	<input type="radio"/>
	<input checked="" type="radio"/>

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA




Guhring no.	1171
Standard	DIN 6538 K
Tool material	Carbide
Carbide grade	P
Surface	S
Type	RT 80 U
Drilling depth	3xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	100



d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
14.600		20.000	122.00	68.00	50.00	●
14.700		20.000	122.00	68.00	50.00	○
15.000		20.000	122.00	68.00	50.00	●
15.100		20.000	122.00	68.00	50.00	●
15.300		20.000	122.00	68.00	50.00	○
15.500		20.000	122.00	68.00	50.00	●
15.600		20.000	122.00	68.00	50.00	○
15.700		20.000	122.00	68.00	50.00	○
15.800		20.000	122.00	68.00	50.00	●
16.000		20.000	122.00	68.00	50.00	●
16.200		20.000	130.00	76.00	50.00	●
16.500		20.000	130.00	76.00	50.00	○
16.700		20.000	130.00	76.00	50.00	●
17.000		20.000	130.00	76.00	50.00	●
17.300		20.000	130.00	76.00	50.00	●
17.500		20.000	130.00	76.00	50.00	●
17.700		20.000	130.00	76.00	50.00	○
17.800		20.000	130.00	76.00	50.00	●
17.860	45/64	20.000	130.00	76.00	50.00	○
17.900		20.000	130.00	76.00	50.00	○
18.000		20.000	130.00	76.00	50.00	●
18.500		25.000	144.00	84.00	56.00	●
19.000		25.000	144.00	84.00	56.00	●
19.300		25.000	144.00	84.00	56.00	○
19.500		25.000	144.00	84.00	56.00	●
19.600		25.000	144.00	84.00	56.00	○
19.700		25.000	144.00	84.00	56.00	●
20.000		25.000	144.00	84.00	56.00	●
20.500		25.000	153.00	93.00	56.00	●
21.000		25.000	153.00	93.00	56.00	●
21.500		25.000	153.00	93.00	56.00	●
22.000		25.000	153.00	93.00	56.00	●
22.220	7/8	25.000	161.00	101.00	56.00	○
22.500		25.000	161.00	101.00	56.00	●
22.620	57/64	25.000	161.00	101.00	56.00	●
23.000		25.000	161.00	101.00	56.00	●



Guhring no.	1171
Standard	DIN 6538 K
Tool material	Carbide
Carbide grade	P
Surface	Ⓢ
Type	RT 80 U
Drilling depth	3xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	100




d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
23.500		25.000	161.00	101.00	56.00
24.000		25.000	161.00	101.00	56.00
24.500		32.000	174.00	110.00	60.00
25.000	63/64	32.000	174.00	110.00	60.00
25.500		32.000	174.00	110.00	60.00

Availability	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	




Guhring no.	1172
Standard	DIN 6538 M
Tool material	Carbide
Carbide grade	P
Surface	S
Type	RT 80 U
Drilling depth	5xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	101



d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
9.800		16.000	127.00	75.00	48.00	○
10.000		16.000	127.00	75.00	48.00	●
10.200		16.000	127.00	75.00	48.00	●
10.500		16.000	127.00	75.00	48.00	●
10.600		16.000	127.00	75.00	48.00	○
10.700		16.000	127.00	75.00	48.00	○
10.800		16.000	127.00	75.00	48.00	○
11.500		16.000	127.00	75.00	48.00	●
11.900		16.000	127.00	75.00	48.00	○
12.000		16.000	127.00	75.00	48.00	●
12.300	31/64	16.000	139.00	87.00	48.00	○
12.500		16.000	139.00	87.00	48.00	●
12.700	1/2	16.000	139.00	87.00	48.00	●
12.900		16.000	139.00	87.00	48.00	○
13.000		16.000	139.00	87.00	48.00	○
13.100	33/64	16.000	139.00	87.00	48.00	●
13.500		16.000	139.00	87.00	48.00	●
13.700		16.000	139.00	87.00	48.00	○
13.900		16.000	139.00	87.00	48.00	○
14.000		16.000	139.00	87.00	48.00	●
14.500		20.000	154.00	100.00	50.00	○
14.600		20.000	154.00	100.00	50.00	○
15.000		20.000	154.00	100.00	50.00	●
15.200		20.000	154.00	100.00	50.00	○
15.500		20.000	154.00	100.00	50.00	●
15.700		20.000	154.00	100.00	50.00	○
16.000		20.000	154.00	100.00	50.00	●
16.200		20.000	166.00	112.00	50.00	●
16.500		20.000	166.00	112.00	50.00	●
16.600		20.000	166.00	112.00	50.00	○
16.700		20.000	166.00	112.00	50.00	●
16.800		20.000	166.00	112.00	50.00	●
17.000		20.000	166.00	112.00	50.00	●
17.200		20.000	166.00	112.00	50.00	○
17.300		20.000	166.00	112.00	50.00	○
17.500		20.000	166.00	112.00	50.00	●



Guhring no.	1172
Standard	DIN 6538 M
Tool material	Carbide
Carbide grade	P
Surface	Ⓢ
Type	RT 80 U
Drilling depth	5xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	101




d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
18.000		20.000	166.00	112.00	50.00	●
18.500		25.000	184.00	124.00	56.00	●
19.000		25.000	184.00	124.00	56.00	●
19.500		25.000	184.00	124.00	56.00	●
19.600		25.000	184.00	124.00	56.00	○
19.700		25.000	184.00	124.00	56.00	●
19.900		25.000	184.00	124.00	56.00	○
20.000		25.000	184.00	124.00	56.00	●
20.500		25.000	197.00	137.00	56.00	●
21.000		25.000	197.00	137.00	56.00	●
21.500		25.000	197.00	137.00	56.00	○
22.000		25.000	197.00	137.00	56.00	●
22.220	7/8	25.000	209.00	149.00	56.00	○
22.500		25.000	209.00	149.00	56.00	●
23.000		25.000	209.00	149.00	56.00	●
23.500		25.000	209.00	149.00	56.00	○
24.000		25.000	209.00	149.00	56.00	●
24.500		32.000	226.00	162.00	60.00	●
25.000	63/64	32.000	226.00	162.00	60.00	●
25.500		32.000	226.00	162.00	60.00	○

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown Ⓐ TiAlN ⓐ TiAlN nanoA Ⓐ TiAlN SuperA



Guhring no.	1173
Standard	DIN 6538 L
Tool material	Carbide
Carbide grade	P
Surface	S
Type	RT 80 U
Drilling depth	7xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	101




d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
9.600		16.000	151.00	99.00	48.00	○
9.700		16.000	151.00	99.00	48.00	○
10.000		16.000	151.00	99.00	48.00	●
10.200		16.000	151.00	99.00	48.00	●
10.400		16.000	151.00	99.00	48.00	○
11.000		16.000	151.00	99.00	48.00	●
11.500		16.000	151.00	99.00	48.00	●
11.700		16.000	151.00	99.00	48.00	○
11.800		16.000	151.00	99.00	48.00	●
12.000		16.000	151.00	99.00	48.00	●
12.200		16.000	167.00	115.00	48.00	○
12.400		16.000	167.00	115.00	48.00	○
12.500		16.000	167.00	115.00	48.00	●
12.700	1/2	16.000	167.00	115.00	48.00	●
13.000		16.000	167.00	115.00	48.00	●
13.500		16.000	167.00	115.00	48.00	●
14.000		16.000	167.00	115.00	48.00	●
14.500		20.000	186.00	132.00	50.00	●
15.000		20.000	186.00	132.00	50.00	●
15.500		20.000	186.00	132.00	50.00	○
15.700		20.000	186.00	132.00	50.00	●
15.800		20.000	186.00	132.00	50.00	○
16.000		20.000	186.00	132.00	50.00	●
16.500		20.000	202.00	148.00	50.00	●
17.000		20.000	202.00	148.00	50.00	●
17.200		20.000	202.00	148.00	50.00	○
17.460	11/16	20.000	202.00	148.00	50.00	○
17.500		20.000	202.00	148.00	50.00	●
18.000		20.000	202.00	148.00	50.00	●
18.500		25.000	224.00	164.00	56.00	●
19.000		25.000	224.00	164.00	56.00	●
19.200		25.000	224.00	164.00	56.00	○
20.000		25.000	224.00	164.00	56.00	●
21.000		25.000	241.00	181.00	56.00	●
22.000		25.000	241.00	181.00	56.00	●
22.500		25.000	257.00	197.00	56.00	○



Ratio drills

Guhring no.	1173
Standard	DIN 6538 L
Tool material	Carbide
Carbide grade	P
Surface	Ⓢ
Type	RT 80 U
Drilling depth	7xD
Cutting direction	right-hand
Tolerance	h7
Discount group	128
Techn. data page	101




d1		d2	l1	l2	l3
mm	inch	mm	mm	mm	mm
25.000	63/64	32.000	278.00	214.00	60.00

Availability
●

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Guhring no.	2713
Standard	DIN 6537 L
Tool material	Solid carbide
Carbide grade	K
Surface	○
Type	FT 200 G
Drilling depth	5xD
Cutting direction	right-hand
Tolerance	m7
Discount group	109
Techn. data page	101

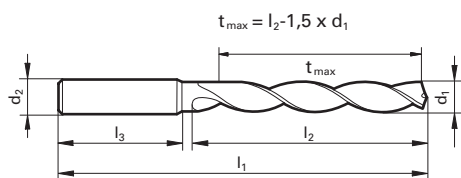


d1						Availability
mm	inch	d2 mm	l1 mm	l2 mm	l3 mm	
3.000		6.000	66.00	28.00	36.00	●
3.100		6.000	66.00	28.00	36.00	●
3.200		6.000	66.00	28.00	36.00	●
3.300		6.000	66.00	28.00	36.00	●
3.500		6.000	66.00	28.00	36.00	●
3.700		6.000	66.00	28.00	36.00	●
3.800		6.000	74.00	36.00	36.00	●
4.000		6.000	74.00	36.00	36.00	●
4.100		6.000	74.00	36.00	36.00	●
4.200		6.000	74.00	36.00	36.00	●
4.500		6.000	74.00	36.00	36.00	●
4.800		6.000	82.00	44.00	36.00	●
5.000		6.000	82.00	44.00	36.00	●
5.100		6.000	82.00	44.00	36.00	●
5.200		6.000	82.00	44.00	36.00	●
5.300		6.000	82.00	44.00	36.00	●
5.500		6.000	82.00	44.00	36.00	●
5.800		6.000	82.00	44.00	36.00	●
6.000		6.000	82.00	44.00	36.00	●
6.100		8.000	91.00	53.00	36.00	●
6.200		8.000	91.00	53.00	36.00	●
6.400		8.000	91.00	53.00	36.00	●
6.500		8.000	91.00	53.00	36.00	●
6.700		8.000	91.00	53.00	36.00	●
6.800		8.000	91.00	53.00	36.00	●
7.000		8.000	91.00	53.00	36.00	●
7.100		8.000	91.00	53.00	36.00	●
7.400		8.000	91.00	53.00	36.00	●
7.500		8.000	91.00	53.00	36.00	●
7.800		8.000	91.00	53.00	36.00	●
8.000		8.000	91.00	53.00	36.00	●
8.100		10.000	103.00	61.00	40.00	●
8.200		10.000	103.00	61.00	40.00	●
8.400		10.000	103.00	61.00	40.00	●
8.500		10.000	103.00	61.00	40.00	●
8.600		10.000	103.00	61.00	40.00	●



Guhring no.	731	611	745	1025	1027
Standard	DIN 6539				
Tool material	Solid carbide				
Carbide grade	K	K/P	K10/K20	K	K10/K20
Surface	○	Ⓢ	○	○	Ⓢ
Type	GS 200 U	GS 200 U	GS 200 G	GS 200 G	GS 200 F
Drilling depth	5xD	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h7	h7	h7	h7	h7
Discount group	109	109	109	109	109
Techn. data page	101	101	102	102	102

Ratio drills

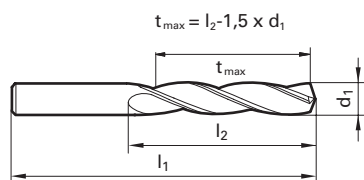

d1				Availability				
mm	inch	l1	l2	731	611	745	1025	1027
3.000		46.00	22.00	●	●		●	●
3.100		49.00	24.00	●			●	
3.200		49.00	24.00	●			●	●
3.300		49.00	24.00	●			●	
3.400		52.00	27.00	●			●	
3.500		52.00	27.00	●			●	
3.570	9/64	52.00	27.00			○	○	
3.600		52.00	27.00	●			●	
3.700		52.00	27.00	●			●	
3.800		55.00	30.00	●			●	
3.900		55.00	30.00	●	●		●	○
3.970	5/32	55.00	30.00	●			●	
4.000		55.00	30.00	●	●		●	●
4.100		55.00	30.00	●	●		●	
4.200		55.00	30.00	●	●		●	
4.300		58.00	32.00	●			●	
4.370	11/64	58.00	32.00	●		○	○	
4.400		58.00	32.00	●			●	
4.500		58.00	32.00	●			●	
4.600		58.00	32.00	●			●	
4.700		58.00	32.00	●	●	○	●	
4.760	3/16	62.00	35.00	●			●	
4.800		62.00	35.00	●			●	
4.900		62.00	35.00	●			●	
5.000		62.00	35.00	●	●		●	●
5.100		62.00	35.00	●			●	
5.200		62.00	35.00	●			●	
5.300		62.00	35.00	●		○	●	○
5.400		66.00	39.00	●			●	
5.500		66.00	39.00	●			●	○
5.600		66.00	39.00	●			●	
5.700		66.00	39.00	●		○	●	
5.800		66.00	39.00	●	●		●	
5.900		66.00	39.00	●			●	
6.000		66.00	39.00	●	●		●	●
6.100		70.00	42.00	●			●	


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



3-flute Ratio drills

Ratio drills

Guhring no.	731	611	745	1025	1027
Standard	DIN 6539				
Tool material	Solid carbide				
Carbide grade	K	K/P	K10/K20	K	K10/K20
Surface	○	Ⓢ	○	○	Ⓢ
Type	GS 200 U	GS 200 U	GS 200 G	GS 200 G	GS 200 F
Drilling depth	5xD	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h7	h7	h7	h7	h7
Discount group	109	109	109	109	109
Techn. data page	101	101	102	102	102

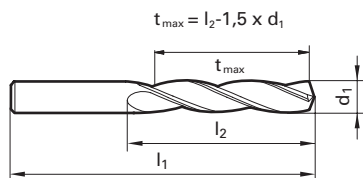


d1				Availability				
mm	inch	l1	l2	731	611	745	1025	1027
6.200		70.00	42.00		●		●	●
6.300		70.00	42.00				●	
6.400		70.00	42.00	●	○		●	
6.500		70.00	42.00	●			●	
6.600		70.00	42.00				●	
6.700		70.00	42.00	●			●	
6.750	17/64	74.00	45.00	●			●	
6.800		74.00	45.00	●	●		●	
6.900		74.00	45.00			○		
7.000		74.00	45.00	●	●		●	●
7.100		74.00	45.00				●	
7.200		74.00	45.00				●	
7.300		74.00	45.00			○		
7.400		74.00	45.00				●	
7.500		74.00	45.00	●			●	
7.600		79.00	48.00				●	
7.700		79.00	48.00	●			●	
7.800		79.00	48.00	●			●	
7.940	5/16	79.00	48.00	●		○		
8.000		79.00	48.00	●	●		●	○
8.100		79.00	48.00	●			●	
8.200		79.00	48.00				●	
8.300		79.00	48.00	●				
8.330	21/64	79.00	48.00			○		
8.400		79.00	48.00	●			●	
8.500		79.00	48.00	●			●	
8.700		84.00	52.00				○	
8.800		84.00	52.00			○	●	
8.900		84.00	52.00			○		
9.000		84.00	52.00	●			●	●
9.100		84.00	52.00				●	
9.200		84.00	52.00	●				
9.300		84.00	52.00			○	●	
9.500		84.00	52.00				●	
9.520	3/8	89.00	55.00				●	
9.600		89.00	55.00				●	

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown Ⓐ TiAlN ⓐ TiAlN nanoA Ⓐ TiAlN SuperA



Guhring no.	731	611	745	1025	1027
Standard	DIN 6539				
Tool material	Solid carbide				
Carbide grade	K	K/P	K10/K20	K	K10/K20
Surface	○	Ⓢ	○	○	Ⓢ
Type	GS 200 U	GS 200 U	GS 200 G	GS 200 G	GS 200 F
Drilling depth	5xD	5xD	5xD	5xD	5xD
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h7	h7	h7	h7	h7
Discount group	109	109	109	109	109
Techn. data page	101	101	102	102	102


Ratio drills

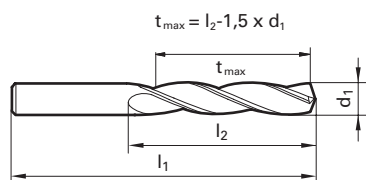

d1				Availability				
mm	inch	l1 mm	l2 mm	731	611	745	1025	1027
9.700		89.00	55.00	●		○	●	
9.800		89.00	55.00				●	
9.900		89.00	55.00	●				
10.000		89.00	55.00	●	●		●	●
10.200		89.00	55.00	●	●		●	
10.300		89.00	55.00				●	
10.320	13/32	89.00	55.00	○				
10.400		89.00	55.00	●				
10.500		89.00	55.00	●				○
10.700		95.00	60.00				●	
10.720	27/64	95.00	60.00	●		○		
10.800		95.00	60.00	●				
11.000		95.00	60.00	●			●	●
11.110	7/16	95.00	60.00				●	
11.200		95.00	60.00				●	
11.300		95.00	60.00	●				
11.500		95.00	60.00	●			●	
11.510	29/64	95.00	60.00				○	
11.600		95.00	60.00	●				
11.700		95.00	60.00	●				
11.800		95.00	60.00				●	
11.910	15/32	102.00	65.00				●	
12.000		102.00	65.00	●	●		●	
12.100		102.00	65.00	●				
12.200		102.00	65.00				●	
12.500		102.00	65.00	●		○	●	
12.700	1/2	102.00	65.00				●	
12.800		102.00	65.00	●				
12.900		102.00	65.00	●				
13.000		102.00	65.00	●			●	
13.200		102.00	65.00	●				
13.500		107.00	66.00	●			●	
13.600		107.00	66.00	●				
13.800		107.00	66.00				●	
14.000		107.00	66.00	●	●		●	
14.300		111.00	70.00	●			●	



Guhring no.	1032
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K
Surface	○
Type	GS 200 G
Drilling depth	
Cutting direction	right-hand
Tolerance	
Discount group	109
Techn. data page	102



d2	d1	for threads	l1	l2	l3	Code no.
mm	mm		mm	mm	mm	
3.400	2.500	M 3	52.00	27.00	9.00	3.401
4.200	3.600		55.00	30.00	10.00	4.200
4.500	3.300		58.00	32.00	11.00	4.501
5.500	4.200	M 5	66.00	39.00	14.00	5.501
5.500	4.700		66.00	39.00	14.00	5.500
6.500	5.600		70.00	42.00	16.00	6.500
6.600	5.000	M 6	70.00	42.00	16.00	6.601
6.800	5.800		74.00	45.00	18.00	6.800
9.000	6.800	M 8	84.00	52.00	22.00	9.001
9.700	8.300		89.00	55.00	25.00	9.700
10.000	8.500		89.00	55.00	25.00	10.000
11.000	8.500	M10	95.00	60.00	28.00	11.001
11.000	8.800	M10 X1,25	95.00	60.00	28.00	11.004
11.000	9.400		95.00	60.00	28.00	11.000
13.500	10.200	M12	107.00	66.00	33.00	13.501
15.500	13.200		115.00	73.00	38.00	15.500
17.500	15.000	M16 X1	123.00	76.00	41.00	17.502
20.000	15.500	M18	131.00	79.00	43.00	20.001
20.000	16.000		131.00	79.00	43.00	20.004

Availability	
●	
○	
●	
●	
○	
○	
●	
●	
●	
○	
○	
●	
●	
○	
○	
○	



Tool holders for interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no. 4106

Standard Guhring std.

Type HT 800 WP

Drilling depth 1,5xD


Cooling axial

Cutting direction right-hand

Discount group 140

Techn. data page 104

NEW

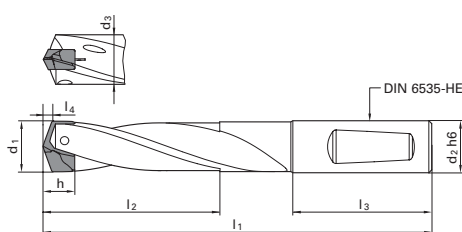


holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
110	11,00-11,49	12.000	10.700	84.00	19.30	45.00	11.000	●
110	11,00-11,49	12.700	10.700	84.00	19.30	45.00	11.005	●
115	11,50-11,99	12.000	11.200	85.00	20.10	45.00	11.500	●
115	11,50-11,99	12.700	11.200	85.00	20.10	45.00	11.505	●
120	12,00-12,49	12.000	11.700	87.00	21.00	45.00	12.000	●
120	12,00-12,49	12.700	11.700	87.00	21.00	45.00	12.005	●
125	12,50-12,99	14.000	12.200	89.00	21.90	45.00	12.500	●
125	12,50-12,99	15.875	12.200	89.00	21.90	45.00	12.505	●
130	13,00-13,49	14.000	12.700	90.00	22.60	45.00	13.000	●
130	13,00-13,49	15.875	12.700	90.00	22.60	45.00	13.005	●
135	13,50-13,99	14.000	13.200	92.00	23.60	45.00	13.500	●
135	13,50-13,99	15.875	13.200	92.00	23.60	45.00	13.505	●
140	14,00-14,49	14.000	13.700	93.00	24.50	45.00	14.000	●
140	14,00-14,49	15.875	13.700	93.00	24.50	45.00	14.005	●
145	14,50-14,99	16.000	14.200	98.00	25.30	48.00	14.500	●
145	14,50-14,99	15.875	14.200	98.00	25.30	48.00	14.505	●
150	15,00-15,49	16.000	14.700	100.00	26.10	48.00	15.000	●
150	15,00-15,49	15.875	14.700	100.00	26.10	48.00	15.005	●
155	15,50-15,99	16.000	15.200	101.00	27.00	48.00	15.500	●
155	15,50-15,99	15.875	15.200	101.00	27.00	48.00	15.505	●
160	16,00-16,49	16.000	15.700	102.00	27.80	48.00	16.000	●
160	16,00-16,49	15.875	15.700	102.00	27.80	48.00	16.005	●
165	16,50-16,99	18.000	16.200	105.00	28.70	48.00	16.500	●
165	16,50-16,99	19.050	16.200	105.00	28.70	48.00	16.505	●
170	17,00-17,49	18.000	16.700	106.00	29.60	48.00	17.000	●
170	17,00-17,49	19.050	16.700	106.00	29.60	48.00	17.005	●
175	17,50-17,99	18.000	17.200	107.00	30.40	48.00	17.500	●
175	17,50-17,99	19.050	17.200	107.00	30.40	48.00	17.505	●
180	18,00-18,49	18.000	17.700	109.00	31.20	48.00	18.000	●
180	18,00-18,49	19.050	17.700	109.00	31.20	48.00	18.005	●
185	18,50-18,99	20.000	18.200	113.00	32.10	50.00	18.500	●
185	18,50-18,99	19.050	18.200	113.00	32.10	50.00	18.505	●
190	19,00-19,49	20.000	18.700	114.00	32.90	50.00	19.000	●
190	19,00-19,49	19.050	18.700	114.00	32.90	50.00	19.005	●
195	19,50-19,99	20.000	19.200	116.00	33.70	50.00	19.500	●
195	19,50-19,99	19.050	19.200	116.00	33.70	50.00	19.505	●
200	20,00-20,49	20.000	19.700	117.00	34.60	50.00	20.000	●
200	20,00-20,49	19.050	19.700	117.00	34.60	50.00	20.005	●
205	20,50-20,99	25.000	20.200	128.00	35.50	56.00	20.500	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	4106
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	1,5xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

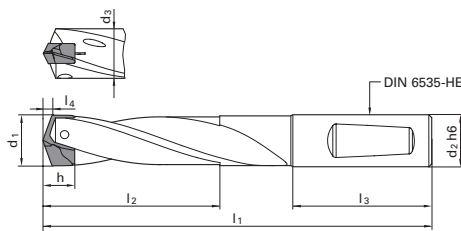

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
205	20,50-20,99	25.400	20.200	128.00	35.50	56.00	20.505	●
210	21,00-21,49	25.000	20.700	129.00	36.40	56.00	21.000	●
210	21,00-21,49	25.400	20.700	129.00	36.40	56.00	21.005	●
215	21,50-21,99	25.000	21.200	130.00	37.20	56.00	21.500	●
215	21,50-21,99	25.400	21.200	130.00	37.20	56.00	21.505	●
220	22,00-22,49	25.000	21.700	131.00	38.00	56.00	22.000	●
220	22,00-22,49	25.400	21.700	131.00	38.00	56.00	22.005	●
225	22,50-22,99	25.000	22.200	134.00	38.90	56.00	22.500	●
225	22,50-22,99	25.400	22.200	134.00	38.90	56.00	22.505	●
230	23,00-23,49	25.000	22.700	135.00	39.80	56.00	23.000	●
230	23,00-23,49	25.400	22.700	135.00	39.80	56.00	23.005	●
235	23,50-23,99	25.000	23.200	137.00	40.60	56.00	23.500	●
235	23,50-23,99	25.400	23.200	137.00	40.60	56.00	23.505	●
240	24,00-24,49	25.000	23.700	138.00	41.50	56.00	24.000	●
240	24,00-24,49	25.400	23.700	138.00	41.50	56.00	24.005	●
245	24,50-24,99	25.000	24.200	140.00	42.30	56.00	24.500	●
245	24,50-24,99	25.400	24.200	140.00	42.30	56.00	24.505	●
250	25,00-25,49	25.000	24.700	142.00	43.20	56.00	25.000	●
250	25,00-25,49	25.400	24.700	142.00	43.20	56.00	25.005	●
255	25,50-25,99	32.000	25.200	148.00	44.00	60.00	25.500	●
255	25,50-25,99	31.750	25.200	148.00	44.00	60.00	25.505	●
260	26,00-26,49	32.000	25.700	151.00	44.30	60.00	26.000	●
260	26,00-26,49	31.750	25.700	151.00	44.30	60.00	26.005	●
265	26,50-26,99	32.000	26.200	153.00	45.10	60.00	26.500	●
265	26,50-26,99	31.750	26.200	153.00	45.10	60.00	26.505	●
270	27,00-27,49	32.000	26.700	155.00	46.00	60.00	27.000	●
270	27,00-27,49	31.750	26.700	155.00	46.00	60.00	27.005	●
275	27,50-27,99	32.000	27.200	156.00	46.80	60.00	27.500	●
275	27,50-27,99	31.750	27.200	156.00	46.80	60.00	27.505	●
280	28,00-28,49	32.000	27.700	157.00	47.70	60.00	28.000	●
280	28,00-28,49	31.750	27.700	157.00	47.70	60.00	28.005	●
285	28,50-28,99	32.000	28.200	159.00	48.50	60.00	28.500	●
285	28,50-28,99	31.750	28.200	159.00	48.50	60.00	28.505	●
290	29,00-29,49	32.000	28.700	161.00	49.40	60.00	29.000	●
290	29,00-29,49	31.750	28.700	161.00	49.40	60.00	29.005	●
295	29,50-29,99	32.000	29.200	162.00	50.20	60.00	29.500	●
295	29,50-29,99	31.750	29.200	162.00	50.20	60.00	29.505	●
300	30,00-30,49	32.000	29.700	164.00	50.90	60.00	30.000	●
300	30,00-30,49	31.750	29.700	164.00	50.90	60.00	30.005	●




Tool holders for interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.	4106
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	1,5xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

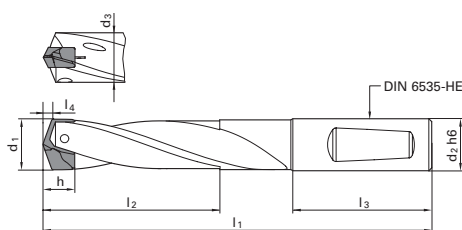

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
305	30,50-30,99	32.000	30.200	166.00	51.70	60.00	30.500	●
305	30,50-30,99	31.750	30.200	166.00	51.70	60.00	30.505	●
310	31,00-31,49	32.000	30.700	167.00	52.60	60.00	31.000	●
310	31,00-31,49	31.750	30.700	167.00	52.60	60.00	31.005	●
315	31,50-31,99	32.000	31.200	168.00	53.40	60.00	31.500	●
315	31,50-31,99	31.750	31.200	168.00	53.40	60.00	31.505	●
320	32,00-32,99	32.000	31.700	172.00	55.10	60.00	32.000	●
320	32,00-32,99	31.750	31.700	172.00	55.10	60.00	32.005	●
330	33,00-33,99	32.000	32.700	175.00	56.80	60.00	33.000	●
330	32,50-32,99	31.750	32.700	175.00	56.80	60.00	33.005	●
340	34,00-34,99	32.000	33.700	178.00	58.50	60.00	34.000	●
340	34,00-34,99	31.750	33.700	178.00	58.50	60.00	34.005	●
350	35,00-35,99	32.000	34.700	181.00	60.20	60.00	35.000	●
350	35,00-35,99	31.750	34.700	181.00	60.20	60.00	35.005	●
360	36,00-36,99	32.000	35.700	184.00	61.80	60.00	36.000	●
360	36,00-36,99	31.750	35.700	184.00	61.80	60.00	36.005	●
370	37,00-37,99	32.000	36.700	188.00	63.50	60.00	37.000	●
370	37,00-37,99	31.750	36.700	188.00	63.50	60.00	37.005	●
380	38,00-38,99	32.000	37.700	191.00	65.20	60.00	38.000	●
380	38,00-38,99	31.750	37.700	191.00	65.20	60.00	38.005	●
390	39,00-40,00	32.000	38.700	194.00	66.90	60.00	39.000	●
390	39,00-40,00	31.750	38.700	194.00	66.90	60.00	39.005	●


○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



T 800 inserts drilling system

Guhring no.	4107
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	3xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

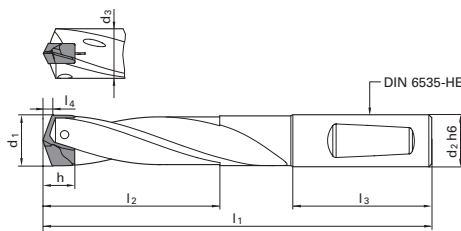

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
110	11,00-11,49	12.000	10.700	101.00	36.60	45.00	11.000	●
110	11,00-11,49	12.700	10.700	101.00	36.60	45.00	11.005	●
115	11,50-11,99	12.000	11.200	103.00	38.10	45.00	11.500	●
115	11,50-11,99	12.700	11.200	103.00	38.10	45.00	11.505	●
120	12,00-12,49	12.000	11.700	106.00	39.70	45.00	12.000	●
120	12,00-12,49	12.700	11.700	106.00	39.70	45.00	12.005	●
125	12,50-12,99	14.000	12.200	108.00	41.30	45.00	12.500	●
125	12,50-12,99	15.875	12.200	108.00	41.30	45.00	12.505	●
130	13,00-13,49	14.000	12.700	110.00	42.90	45.00	13.000	●
130	13,00-13,49	15.875	12.700	110.00	42.90	45.00	13.005	●
135	13,50-13,99	14.000	13.200	113.00	44.60	45.00	13.500	●
135	13,50-13,99	15.875	13.200	113.00	44.60	45.00	13.505	●
140	14,00-14,49	14.000	13.700	115.00	46.20	45.00	14.000	●
140	14,00-14,49	15.875	13.700	115.00	46.20	45.00	14.005	●
145	14,50-14,99	16.000	14.200	120.00	47.80	48.00	14.500	●
145	14,50-14,99	15.875	14.200	120.00	47.80	48.00	14.505	●
150	15,00-15,49	16.000	14.700	123.00	49.30	48.00	15.000	●
150	15,00-15,49	15.875	14.700	123.00	49.30	48.00	15.005	●
155	15,50-15,99	16.000	15.200	125.00	50.90	48.00	15.500	●
155	15,50-15,99	15.875	15.200	125.00	50.90	48.00	15.505	●
160	16,00-16,49	16.000	15.700	127.00	52.90	48.00	16.000	●
160	16,00-16,49	15.875	15.700	127.00	52.90	48.00	16.005	●
165	16,50-16,99	18.000	16.200	130.00	54.10	48.00	16.500	●
165	16,50-16,99	19.050	16.200	130.00	54.10	48.00	16.505	●
170	17,00-17,49	18.000	16.700	132.00	55.80	48.00	17.000	●
170	17,00-17,49	19.050	16.700	132.00	55.80	48.00	17.005	●
175	17,50-17,99	18.000	17.200	134.00	57.40	48.00	17.500	●
175	17,50-17,99	19.050	17.200	134.00	57.40	48.00	17.505	●
180	18,00-18,49	18.000	17.700	137.00	58.90	48.00	18.000	●
180	18,00-18,49	19.050	17.700	137.00	58.90	48.00	18.005	●
185	18,50-18,99	20.000	18.200	141.00	60.50	50.00	18.500	●
185	18,50-18,99	19.050	18.200	141.00	60.50	50.00	18.505	●
190	19,00-19,49	20.000	18.700	143.00	62.10	50.00	19.000	●
190	19,00-19,49	19.050	18.700	143.00	62.10	50.00	19.005	●
195	19,50-19,99	20.000	19.200	146.00	63.70	50.00	19.500	●
195	19,50-19,99	19.050	19.200	146.00	63.70	50.00	19.505	●
200	20,00-20,49	20.000	19.700	148.00	65.30	50.00	20.000	●
200	20,00-20,49	19.050	19.700	148.00	65.30	50.00	20.005	●
205	20,50-20,99	25.000	20.200	159.00	67.00	56.00	20.500	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum




Tool holders for interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.	4107
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	3xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

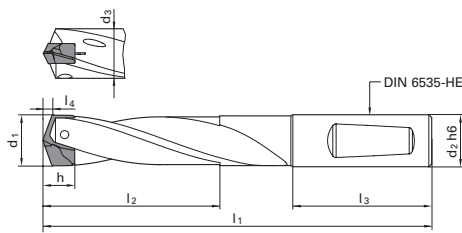


holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
205	20,50-20,99	25.400	20.200	159.00	67.00	56.00	20.505	●
210	21,00-21,49	25.000	20.700	161.00	68.60	56.00	21.000	●
210	21,00-21,49	25.400	20.700	161.00	68.60	56.00	21.005	●
215	21,50-21,99	25.000	21.200	163.00	70.10	56.00	21.500	●
215	21,50-21,99	25.400	21.200	163.00	70.10	56.00	21.505	●
220	22,00-22,49	25.000	21.700	165.00	71.70	56.00	22.000	●
220	22,00-22,49	25.400	21.700	165.00	71.70	56.00	22.005	●
225	22,50-22,99	25.000	22.200	168.00	73.30	56.00	22.500	●
225	22,50-22,99	25.400	22.200	168.00	73.30	56.00	22.505	●
230	23,00-23,49	25.000	22.700	170.00	74.90	56.00	23.000	●
230	23,00-23,49	25.400	22.700	170.00	74.90	56.00	23.005	●
235	23,50-23,99	25.000	23.200	173.00	76.50	56.00	23.500	●
235	23,50-23,99	25.400	23.200	173.00	76.50	56.00	23.505	●
240	24,00-24,49	25.000	23.700	175.00	78.10	56.00	24.000	●
240	24,00-24,49	25.400	23.700	175.00	78.10	56.00	24.005	●
245	24,50-24,99	25.000	24.200	177.00	79.70	56.00	24.500	●
245	24,50-24,99	25.400	24.200	177.00	79.70	56.00	24.505	●
250	25,00-25,49	25.000	24.700	180.00	81.30	56.00	25.000	●
250	25,00-25,49	25.400	24.700	180.00	81.30	56.00	25.005	●
255	25,50-25,99	32.000	25.200	187.00	82.90	60.00	25.500	●
255	25,50-25,99	31.750	25.200	187.00	82.90	60.00	25.505	●
260	26,00-26,49	32.000	25.700	191.00	84.00	60.00	26.000	●
260	26,00-26,49	31.750	25.700	191.00	84.00	60.00	26.005	●
265	26,50-26,99	32.000	26.200	193.00	86.10	60.00	26.500	●
265	26,50-26,99	31.750	26.200	193.00	86.10	60.00	26.505	●
270	27,00-27,49	32.000	26.700	196.00	87.20	60.00	27.000	●
270	27,00-27,49	31.750	26.700	196.00	87.20	60.00	27.005	●
275	27,50-27,99	32.000	27.200	198.00	88.90	60.00	27.500	●
275	27,50-27,99	31.750	27.200	198.00	88.90	60.00	27.505	●
280	28,00-28,49	32.000	27.700	200.00	90.40	60.00	28.000	●
280	28,00-28,49	31.750	27.700	200.00	90.40	60.00	28.005	●
285	28,50-28,99	32.000	28.200	202.00	92.50	60.00	28.500	●
285	28,50-28,99	31.750	28.200	202.00	92.50	60.00	28.505	●
290	29,00-29,49	32.000	28.700	205.00	94.60	60.00	29.000	●
290	29,00-29,49	31.750	28.700	205.00	94.60	60.00	29.005	●
295	29,50-29,99	32.000	29.200	207.00	95.10	60.00	29.500	●
295	29,50-29,99	31.750	29.200	207.00	95.10	60.00	29.505	●
300	30,00-30,49	32.000	29.700	210.00	96.70	60.00	30.000	●
300	30,00-30,49	31.750	29.700	210.00	96.70	60.00	30.005	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Guhring no.	4107
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	3xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

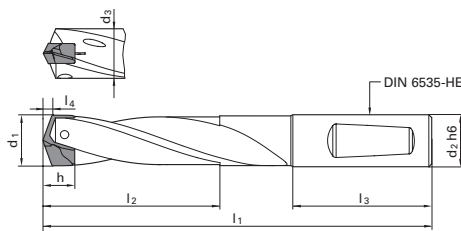


holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
305	30,50-30,99	32.000	30.200	212.00	98.30	60.00	30.500	●
305	30,50-30,99	31.750	30.200	212.00	98.30	60.00	30.505	●
310	31,00-31,49	32.000	30.700	214.00	99.80	60.00	31.000	●
310	31,00-31,49	31.750	30.700	214.00	99.80	60.00	31.005	●
315	31,50-31,99	32.000	31.200	216.00	101.40	60.00	31.500	●
315	31,50-31,99	31.750	31.200	216.00	101.40	60.00	31.505	●
320	32,00-32,99	32.000	31.700	221.00	104.60	60.00	32.000	●
320	32,00-32,99	31.750	31.700	221.00	104.60	60.00	32.005	●
330	33,00-33,99	32.000	32.700	226.00	107.80	60.00	33.000	●
330	32,50-33,99	31.750	32.700	226.00	107.80	60.00	33.005	●
340	34,00-34,99	32.000	33.700	230.00	111.00	60.00	34.000	●
340	34,00-34,99	31.750	33.700	230.00	111.00	60.00	34.005	●
350	35,00-35,99	32.000	34.700	235.00	114.20	60.00	35.000	●
350	35,00-35,99	31.750	34.700	235.00	114.20	60.00	35.005	●
360	36,00-36,99	32.000	35.700	240.00	117.30	60.00	36.000	●
360	36,00-36,99	31.750	35.700	240.00	117.30	60.00	36.005	●
370	37,00-37,99	32.000	36.700	245.00	120.50	60.00	37.000	●
370	37,00-37,99	31.750	36.700	245.00	120.50	60.00	37.005	●
380	38,00-38,99	32.000	37.700	249.00	123.70	60.00	38.000	●
380	38,00-38,99	31.750	37.700	249.00	123.70	60.00	38.005	●
390	39,00-40,00	32.000	38.700	254.00	126.90	60.00	39.000	●
390	39,00-40,00	31.750	38.700	254.00	126.90	60.00	39.005	●



Guhring no.	4108
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	5xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

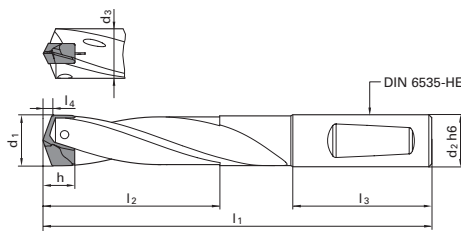

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
205	20,50-20,99	25.400	20.200	201.00	109.00	56.00	20.505	●
210	21,00-21,49	25.000	20.700	204.00	111.60	56.00	21.000	●
210	21,00-21,49	25.400	20.700	204.00	111.60	56.00	21.005	●
215	21,50-21,99	25.000	21.200	207.00	114.10	56.00	21.500	●
215	21,50-21,99	25.400	21.200	207.00	114.10	56.00	21.505	●
220	22,00-22,49	25.000	21.700	210.00	116.70	56.00	22.000	●
220	22,00-22,49	25.400	21.700	210.00	116.70	56.00	22.005	●
225	22,50-22,99	25.000	22.200	214.00	119.30	56.00	22.500	●
225	22,50-22,99	25.400	22.200	214.00	119.30	56.00	22.505	●
230	23,00-23,49	25.000	22.700	217.00	121.90	56.00	23.000	●
230	23,00-23,49	25.400	22.700	217.00	121.90	56.00	23.005	●
235	23,50-23,99	25.000	23.200	221.00	124.50	56.00	23.500	●
235	23,50-23,99	25.400	23.200	221.00	124.50	56.00	23.505	●
240	24,00-24,49	25.000	23.700	224.00	127.10	56.00	24.000	●
240	24,00-24,49	25.400	23.700	224.00	127.10	56.00	24.005	●
245	24,50-24,99	25.000	24.200	227.00	129.70	56.00	24.500	●
245	24,50-24,99	25.400	24.200	227.00	129.70	56.00	24.505	●
250	25,00-25,49	25.000	24.700	231.00	132.30	56.00	25.000	●
250	25,00-25,49	25.400	24.700	231.00	132.30	56.00	25.005	●
255	25,50-25,99	32.000	25.200	239.00	134.90	60.00	25.500	●
255	25,50-25,99	31.750	25.200	239.00	134.90	60.00	25.505	●
260	26,00-26,49	32.000	25.700	244.00	137.00	60.00	26.000	●
265	26,50-26,99	32.000	26.200	247.00	140.00	60.00	26.500	●
270	27,00-27,49	32.000	26.700	251.00	142.20	60.00	27.000	●
275	27,50-27,99	32.000	27.200	254.00	144.80	60.00	27.500	●
280	28,00-28,49	32.000	27.700	257.00	147.40	60.00	28.000	●
285	28,50-28,99	32.000	28.200	260.00	150.40	60.00	28.500	●
290	29,00-29,49	32.000	28.700	264.00	153.50	60.00	29.000	●
295	29,50-29,99	32.000	29.200	267.00	155.10	60.00	29.500	●
300	30,00-30,49	32.000	29.700	271.00	157.60	60.00	30.000	●
305	30,50-30,99	32.000	30.200	274.00	160.20	60.00	30.500	●
310	31,00-31,49	32.000	30.700	277.00	162.80	60.00	31.000	●
315	31,50-31,99	32.000	31.200	280.00	165.40	60.00	31.500	●
320	32,00-32,99	32.000	31.700	287.00	170.60	60.00	32.000	●
330	33,00-33,99	32.000	32.700	294.00	175.80	60.00	33.000	●
340	34,00-34,99	32.000	33.700	300.00	181.00	60.00	34.000	●
350	35,00-35,99	32.000	34.700	307.00	186.20	60.00	35.000	●
360	36,00-36,99	32.000	35.700	314.00	191.30	60.00	36.000	●
370	37,00-37,99	32.000	36.700	321.00	196.50	60.00	37.000	●



Tool holders for interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.

4108

Standard

Guhring std.

Type

HT 800 WP

Drilling depth

5xD

Cooling

axial

Cutting direction

right-hand


Discount group

140

Techn. data page

104

NEW

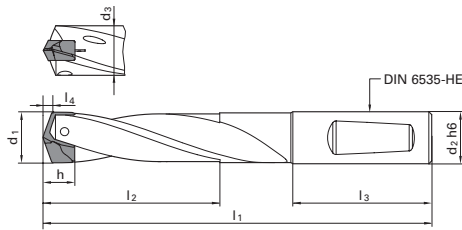

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.
	mm	mm	mm	mm	mm	mm	
380	38,00-38,99	32.000	37.700	327.00	201.70	60.00	38.000
390	39,00-40,00	32.000	38.700	334.00	206.90	60.00	39.000

Availability




bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Guhring no.	4109
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	7xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

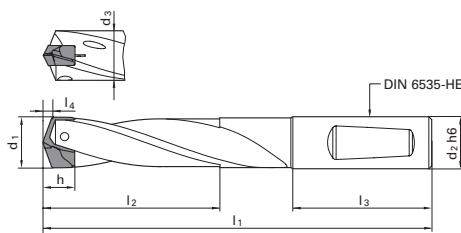


holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
110	11,00-11,49	12.000	10.700	147.00	82.60	45.00	11.000	●
110	11,00-11,49	12.700	10.700	147.00	82.60	45.00	11.005	●
115	11,50-11,99	12.000	11.200	151.00	86.10	45.00	11.500	●
115	11,50-11,99	12.700	11.200	151.00	86.10	45.00	11.505	●
120	12,00-12,49	12.000	11.700	156.00	89.70	45.00	12.000	●
120	12,00-12,49	12.700	11.700	156.00	89.70	45.00	12.005	●
125	12,50-12,99	14.000	12.200	160.00	93.30	45.00	12.500	●
125	12,50-12,99	15.875	12.200	160.00	93.30	45.00	12.505	●
130	13,00-13,49	14.000	12.700	164.00	96.90	45.00	13.000	●
130	13,00-13,49	15.875	12.700	164.00	96.90	45.00	13.005	●
135	13,50-13,99	14.000	13.200	169.00	100.60	45.00	13.500	●
135	13,50-13,99	15.875	13.200	169.00	100.60	45.00	13.505	●
140	14,00-14,49	14.000	13.700	173.00	104.20	45.00	14.000	●
140	14,00-14,49	15.875	13.700	173.00	104.20	45.00	14.005	●
145	14,50-14,99	16.000	14.200	180.00	107.80	48.00	14.500	●
145	14,50-14,99	15.875	14.200	180.00	107.80	48.00	14.505	●
150	15,00-15,49	16.000	14.700	185.00	111.30	48.00	15.000	●
150	15,00-15,49	15.875	14.700	185.00	111.30	48.00	15.005	●
155	15,50-15,99	16.000	15.200	189.00	114.90	48.00	15.500	●
155	15,50-15,99	15.875	15.200	189.00	114.90	48.00	15.505	●
160	16,00-16,49	16.000	15.700	193.00	118.90	48.00	16.000	●
160	16,00-16,49	15.875	15.700	193.00	118.90	48.00	16.005	●
165	16,50-16,99	18.000	16.200	198.00	122.10	48.00	16.500	●
165	16,50-16,99	19.050	16.200	198.00	122.10	48.00	16.505	●
170	17,00-17,49	18.000	16.700	202.00	125.80	48.00	17.000	●
170	17,00-17,49	19.050	16.700	202.00	125.80	48.00	17.005	●
175	17,50-17,99	18.000	17.200	206.00	129.40	48.00	17.500	●
175	17,50-17,99	19.050	17.200	206.00	129.40	48.00	17.505	●
180	18,00-18,49	18.000	17.700	211.00	132.90	48.00	18.000	●
180	18,00-18,49	19.050	17.700	211.00	132.90	48.00	18.005	●
185	18,50-18,99	20.000	18.200	217.00	136.50	50.00	18.500	●
185	18,50-18,99	19.050	18.200	217.00	136.50	50.00	18.505	●
190	19,00-19,49	20.000	18.700	221.00	140.10	50.00	19.000	●
190	19,00-19,49	19.050	18.700	221.00	140.10	50.00	19.005	●
195	19,50-19,99	20.000	19.200	226.00	143.70	50.00	19.500	●
195	19,50-19,99	19.050	19.200	226.00	143.70	50.00	19.505	●
200	20,00-20,49	20.000	19.700	230.00	147.30	50.00	20.000	●
200	20,00-20,49	19.050	19.700	230.00	147.30	50.00	20.005	●
205	20,50-20,99	25.000	20.200	243.00	151.00	56.00	20.500	●



Guhring no.	4109
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	7xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

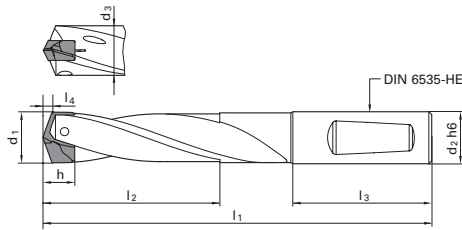


holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.
	mm	mm	mm	mm	mm	mm	
305	30,50-30,99	32.000	30.200	336.00	222.20	60.00	30.500
305	30,50-30,99	31.750	30.200	336.00	222.20	60.00	30.505
310	31,00-31,49	32.000	30.700	340.00	225.80	60.00	31.000
310	31,00-31,49	31.750	30.700	340.00	225.80	60.00	31.005
315	31,50-31,99	32.000	31.200	344.00	229.40	60.00	31.500
315	31,50-31,99	31.750	31.200	344.00	229.40	60.00	31.505

Availability
●
●
●
●
●
●



Guhring no.	4110
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	10xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	104

NEW

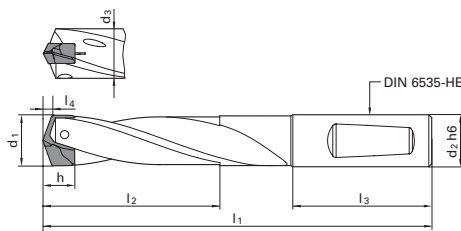

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
205	20,50-20,99	25.400	20.200	306.00	214.00	56.00	20.505	●
210	21,00-21,49	25.000	20.700	312.00	219.10	56.00	21.000	●
210	21,00-21,49	25.400	20.700	312.00	219.10	56.00	21.005	●
215	21,50-21,99	25.000	21.200	317.00	224.20	56.00	21.500	●
215	21,50-21,99	25.400	21.200	317.00	224.20	56.00	21.505	●
220	22,00-22,49	25.000	21.700	323.00	229.30	56.00	22.000	●
220	22,00-22,49	25.400	21.700	323.00	229.30	56.00	22.005	●
225	22,50-22,99	25.000	22.200	329.00	234.40	56.00	22.500	●
225	22,50-22,99	25.400	22.200	329.00	234.40	56.00	22.505	●
230	23,00-23,49	25.000	22.700	335.00	239.50	56.00	23.000	●
230	23,00-23,49	25.400	22.700	335.00	239.50	56.00	23.005	●
235	23,50-23,99	25.000	23.200	341.00	244.60	56.00	23.500	●
235	23,50-23,99	25.400	23.200	341.00	244.60	56.00	23.505	●
240	24,00-24,49	25.000	23.700	347.00	249.70	56.00	24.000	●
240	24,00-24,49	25.400	23.700	347.00	249.70	56.00	24.005	●
245	24,50-24,99	25.000	24.200	352.00	254.80	56.00	24.500	●
245	24,50-24,99	25.400	24.200	352.00	254.80	56.00	24.505	●
250	25,00-25,49	25.000	24.700	359.00	259.90	56.00	25.000	●
250	25,00-25,49	25.400	24.700	359.00	259.90	56.00	25.005	●
255	25,50-25,99	32.000	25.200	369.00	265.00	60.00	25.500	●
255	25,50-25,99	31.750	25.200	369.00	265.00	60.00	25.505	●
260	26,00-26,49	32.000	25.700	377.00	270.00	60.00	26.000	●
260	26,00-26,49	31.750	25.700	377.00	270.00	60.00	26.005	●
265	26,50-26,99	32.000	26.200	382.00	275.00	60.00	26.500	●
265	26,50-26,99	31.750	26.200	382.00	275.00	60.00	26.505	●
270	27,00-27,49	32.000	26.700	388.00	280.10	60.00	27.000	●
270	27,00-27,49	31.750	26.700	388.00	280.10	60.00	27.005	●
275	27,50-27,99	32.000	27.200	394.00	285.20	60.00	27.500	●
275	27,50-27,99	31.750	27.200	394.00	285.20	60.00	27.505	●
280	28,00-28,49	32.000	27.700	400.00	290.30	60.00	28.000	●
280	28,00-28,49	31.750	27.700	400.00	290.30	60.00	28.005	●
285	28,50-28,99	32.000	28.200	405.00	295.40	60.00	28.500	●
285	28,50-28,99	31.750	28.200	405.00	295.40	60.00	28.505	●
290	29,00-29,49	32.000	28.700	412.00	300.50	60.00	29.000	●
290	29,00-29,49	31.750	28.700	412.00	300.50	60.00	29.005	●
295	29,50-29,99	32.000	29.200	418.00	305.60	60.00	29.500	●
295	29,50-29,99	31.750	29.200	418.00	305.60	60.00	29.505	●
300	30,00-30,49	32.000	29.700	424.00	310.60	60.00	30.000	●
300	30,00-30,49	31.750	29.700	424.00	310.60	60.00	30.005	●



Tool holders for interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no. **4110**

Standard **Guhring std.**

Type **HT 800 WP**

Drilling depth **10xD**


Cooling **axial**

Cutting direction **right-hand**

Discount group **140**

Techn. data page **104**

NEW

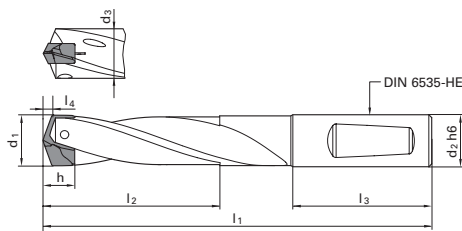

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.
	mm	mm	mm	mm	mm	mm	
305	30,50-30,99	32.000	30.200	429.00	315.70	60.00	30.500
305	30,50-30,99	31.750	30.200	429.00	315.70	60.00	30.505
310	31,00-31,49	32.000	30.700	435.00	320.80	60.00	31.000
310	31,00-31,49	31.750	30.700	435.00	320.80	60.00	31.005
315	31,50-31,99	32.000	31.200	441.00	325.90	60.00	31.500
315	31,50-31,99	31.750	31.200	441.00	325.90	60.00	31.505


Availability

-
-
-
-
-
-



Guhring no.	4105
Standard	Guhring std.
Type	HT 800 WP
Drilling depth	1xD
Cooling	axial
Cutting direction	right-hand
Discount group	140
Techn. data page	105

NEW

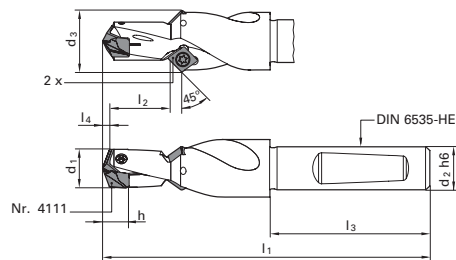

holder size	d1	d2 h6	d3	l1	l2 max.	l3	Code no.	Availability
	mm	mm	mm	mm	mm	mm		
110	11,00-11,99	12.000	17.000	81.00	12.00	45.00	11.000	●
110	11,00-11,99	12.700	17.000	81.00	12.00	45.00	11.005	●
120	12,00-12,99	12.000	18.000	84.00	13.00	45.00	12.000	●
120	12,00-12,99	12.700	18.000	84.00	13.00	45.00	12.005	●
130	13,00-13,99	14.000	18.000	86.00	14.00	45.00	13.000	●
130	13,00-13,99	15.875	18.000	86.00	14.00	48.00	13.005	●
140	14,00-15,99	16.000	18.000	93.00	16.00	48.00	14.000	●
140	14,00-15,99	15.875	18.000	93.00	16.00	48.00	14.005	●
160	16,00-17,99	18.000	20.000	99.00	18.00	48.00	16.000	●
160	16,00-17,99	19.050	20.000	99.00	18.00	50.00	16.005	●
180	18,00-19,99	20.000	22.000	106.00	20.00	50.00	18.000	●
180	18,00-19,99	19.050	22.000	106.00	20.00	50.00	18.005	●
200	20,00-21,99	25.000	24.000	117.00	22.00	56.00	20.000	●
200	20,00-21,99	25.400	24.000	117.00	22.00	56.00	20.005	●
220	22,00-23,99	25.000	26.000	122.00	24.00	56.00	22.000	●
220	22,00-23,99	25.400	26.000	122.00	24.00	56.00	22.005	●
240	24,00-25,99	25.000	28.000	128.00	26.00	56.00	24.000	●
240	24,00-25,99	25.400	28.000	128.00	26.00	56.00	24.005	●
260	26,00-27,99	32.000	32.000	142.00	28.00	60.00	26.000	●
260	26,00-27,99	31.750	32.000	142.00	28.00	60.00	26.005	●
280	28,00-29,99	32.000	34.000	147.00	30.00	60.00	28.000	●
280	28,00-29,99	31.750	34.000	147.00	30.00	60.00	28.005	●
300	30,00-31,99	32.000	38.000	152.00	32.00	60.00	30.000	●
300	30,00-31,99	31.750	38.000	152.00	32.00	60.00	30.005	●
320	32,00-35,99	32.000	42.000	163.00	36.00	60.00	32.000	●
320	32,00-35,99	31.750	42.000	163.00	36.00	60.00	32.005	●
360	36,00-40,00	32.000	46.000	173.00	40.00	60.00	36.000	●
360	36,00-40,00	31.750	46.000	173.00	40.00	60.00	36.005	●





Interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.	4112
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	h7
Discount group	141
Techn. data page	105

NEW


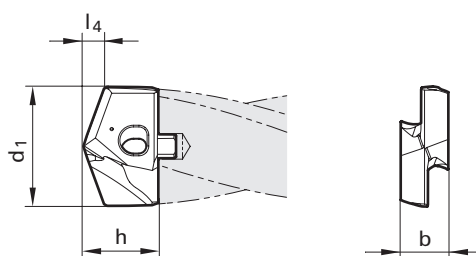


holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
110	11.000		2.10	4.500	7.50	11.000	●
110	11.200		2.10	4.500	7.50	11.200	●
115	11.500		2.10	4.500	7.50	11.500	●
115	11.510	29/64	2.10	4.500	7.50	11.510	●
115	11.700		2.20	4.500	7.50	11.700	●
115	11.800		2.20	4.500	7.50	11.800	●
115	11.910	15/32	2.20	4.500	7.50	11.910	●
120	12.000		2.20	5.000	7.70	12.000	●
120	12.100		2.20	5.000	7.70	12.100	●
120	12.200		2.20	5.000	7.70	12.200	●
120	12.300	31/64	2.20	5.000	7.70	12.300	●
125	12.500		2.30	5.000	7.70	12.500	●
125	12.600		2.30	5.000	7.70	12.600	●
125	12.700	1/2	2.30	5.000	7.70	12.700	●
125	12.800		2.30	5.000	7.70	12.800	●
125	12.900		2.30	5.000	7.70	12.900	●
130	13.000		2.40	5.500	8.50	13.000	●
130	13.100	33/64	2.40	5.500	8.50	13.100	●
130	13.490	17/32	2.40	5.500	8.50	13.490	●
135	13.500		2.40	5.500	8.50	13.500	●
135	13.600		2.40	5.500	8.50	13.600	●
135	13.700		2.40	5.500	8.50	13.700	●
135	13.800		2.50	5.500	8.50	13.800	●
135	13.890	35/64	2.50	5.500	8.50	13.890	●
140	14.000		2.50	6.000	9.60	14.000	●
140	14.100		2.50	6.000	9.60	14.100	●
140	14.290	9/16	2.60	6.000	9.60	14.290	●
140	14.400		2.60	6.000	9.60	14.400	●
145	14.500		2.60	6.000	9.60	14.500	●
145	14.600		2.70	6.000	9.60	14.600	●
145	14.680	37/64	2.70	6.000	9.60	14.680	●
145	14.700		2.70	6.000	9.60	14.700	●
145	14.800		2.70	6.000	9.60	14.800	●
150	15.000		2.70	6.000	9.80	15.000	●
150	15.080	19/32	2.70	6.000	9.80	15.080	●
150	15.100		2.70	6.000	9.80	15.100	●
150	15.200		2.80	6.000	9.80	15.200	●
150	15.300		2.80	6.000	9.80	15.300	●
150	15.480	39/64	2.80	6.000	9.80	15.480	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA

Guhring no.	4112
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	h7
Discount group	141
Techn. data page	105

NEW

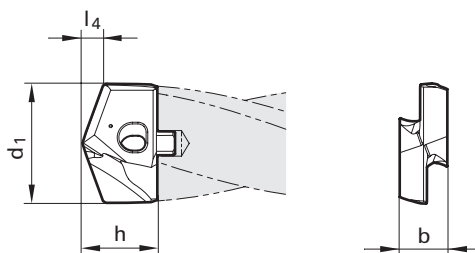

holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
155	15.500		2.80	6.000	9.80	15.500	●
155	15.600		2.90	6.000	9.80	15.600	●
155	15.700		2.90	6.000	9.80	15.700	●
155	15.800		2.90	6.000	9.80	15.800	●
155	15.870	5/8	2.90	6.000	9.80	15.870	●
160	16.000		2.90	7.000	11.00	16.000	●
160	16.270	41/64	3.00	7.000	11.00	16.270	●
165	16.500		3.00	7.000	11.00	16.500	●
165	16.670	21/32	3.00	7.000	11.00	16.670	●
170	17.000		3.10	7.000	11.00	17.000	●
170	17.070	43/64	3.10	7.000	11.00	17.070	●
170	17.460	11/16	3.10	7.000	11.00	17.460	●
175	17.500		3.20	7.000	11.00	17.500	●
175	17.600		3.20	7.000	11.00	17.600	●
175	17.860	45/64	3.30	7.000	11.00	17.860	●
180	18.000		3.30	8.000	12.60	18.000	●
180	18.260	23/32	3.40	8.000	12.60	18.260	●
185	18.500		3.40	8.000	12.60	18.500	●
185	18.650	47/64	3.40	8.000	12.60	18.650	●
190	19.000		3.50	8.000	12.60	19.000	●
190	19.050	3/4	3.50	8.000	12.60	19.050	●
190	19.250		3.60	8.000	12.60	19.250	●
190	19.450	49/64	3.60	8.000	12.60	19.450	●
195	19.500		3.60	8.000	12.60	19.500	●
195	19.600		3.60	8.000	12.60	19.600	●
195	19.840	25/32	3.70	8.000	12.60	19.840	●
200	20.000		3.70	9.000	13.90	20.000	●
200	20.240	51/64	3.70	9.000	13.90	20.240	●
205	20.500		3.80	9.000	13.90	20.500	●
205	20.640	13/16	3.80	9.000	13.90	20.640	●
210	21.000		3.90	9.000	13.90	21.000	●
210	21.030	53/64	3.90	9.000	13.90	21.030	●
210	21.100		3.90	9.000	13.90	21.100	●
210	21.430	27/32	3.90	9.000	13.90	21.430	●
215	21.500		4.00	9.000	13.90	21.500	●
215	21.830	55/64	4.00	9.000	13.90	21.830	●
220	22.000		4.10	10.000	15.30	22.000	●
220	22.220	7/8	4.10	10.000	15.30	22.220	●
225	22.500		4.10	10.000	15.30	22.500	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA





Interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.	4112
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	h7
Discount group	141
Techn. data page	105

NEW


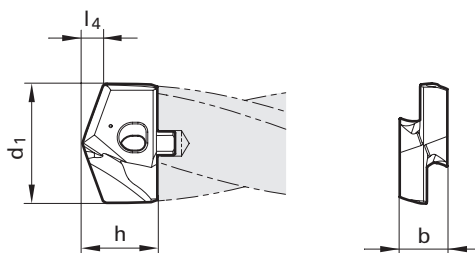


holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
225	22.620	57/64	4.20	10.000	15.30	22.620	●
230	23.000		4.20	10.000	15.30	23.000	●
230	23.020	29/32	4.20	10.000	15.30	23.020	●
230	23.420	59/64	4.30	10.000	15.30	23.420	●
235	23.500		4.30	10.000	15.30	23.500	●
235	23.810	15/16	4.40	10.000	15.30	23.810	●
240	24.000		4.40	11.000	15.80	24.000	●
240	24.100		4.40	11.000	15.80	24.100	●
240	24.210	61/64	4.50	11.000	15.80	24.210	●
245	24.500		4.50	11.000	15.80	24.500	●
245	24.610	31/32	4.50	11.000	15.80	24.610	●
250	25.000	63/64	4.60	11.000	15.80	25.000	●
250	25.400	1	4.70	11.000	15.80	25.400	●
265	25.500		4.70	11.000	15.80	25.500	●
255	25.670		4.70	11.000	15.80	25.670	●
255	25.700		4.70	11.000	15.80	25.700	●
255	25.810		4.70	11.000	15.80	25.810	●
260	26.000		4.80	12.000	20.00	26.000	●
260	26.190	1 1/32	4.80	12.000	20.00	26.190	●
265	26.500		4.90	12.000	20.00	26.500	●
265	26.590	1 3/64	4.90	12.000	20.00	26.590	●
270	27.000		5.00	12.000	20.00	27.000	●
275	27.500		5.10	12.000	20.00	27.500	●
275	27.700		5.10	12.000	20.00	27.700	●
275	27.780	1 3/32	5.10	12.000	20.00	27.780	●
280	28.000		5.10	13.000	20.70	28.000	●
280	28.180	1 7/64	5.20	13.000	20.70	28.180	●
280	28.500		5.20	13.000	20.70	28.500	●
285	28.580		5.30	13.000	20.70	28.580	●
290	29.000		5.30	13.000	20.70	29.000	●
290	29.370	1 5/32	5.40	13.000	20.70	29.370	●
295	29.500		5.40	13.000	20.70	29.500	●
295	29.770	1 11/64	5.50	13.000	20.70	29.770	●
300	30.000		5.50	14.000	22.30	30.000	●
300	30.160	1 3/16	5.50	14.000	22.30	30.160	●
305	30.500		5.60	14.000	22.30	30.500	●
305	30.960	1 7/32	5.70	14.000	22.30	30.960	●
310	31.000		5.70	14.000	22.30	31.000	●
315	31.500		5.80	14.000	22.30	31.500	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA

Guhring no.	4112
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	h7
Discount group	141
Techn. data page	105

NEW

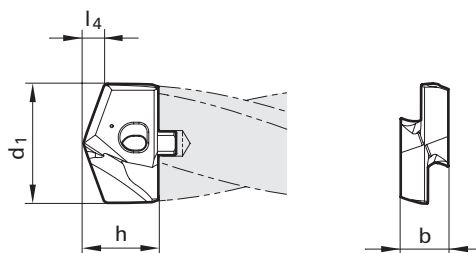


holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
315	31.750	1 1/4	5.80	14.000	22.30	31.750	●
320	32.000		5.90	15.000	23.10	32.000	●
320	32.500		6.00	15.000	23.10	32.500	●
320	32.540	1 9/32	6.00	15.000	23.10	32.540	●
320	32.940	1 19/64	6.00	15.000	23.10	32.940	●
330	33.000		6.10	15.000	23.10	33.000	●
330	33.340	1 5/16	6.10	15.000	23.10	33.340	●
330	33.500		6.10	15.000	23.10	33.500	●
340	34.000		6.20	15.000	23.10	34.000	●
340	34.130	1 11/32	6.30	15.000	23.10	34.130	●
340	34.500		6.30	15.000	23.10	34.500	●
340	34.930		6.40	15.000	23.10	34.930	●
350	35.000		6.40	15.000	23.10	35.000	●
350	35.500		6.50	15.000	23.10	35.500	●
350	35.720	1 13/32	6.60	15.000	23.10	35.720	●
360	36.000		6.60	16.000	23.90	36.000	●
360	36.500		6.70	16.000	23.90	36.500	●
360	36.510	1 7/16	6.70	16.000	23.90	36.510	●
370	37.000		6.80	16.000	23.90	37.000	●
370	37.310	1 15/32	6.80	16.000	23.90	37.310	●
370	37.500		6.90	16.000	23.90	37.500	●
380	38.000		7.00	16.000	23.90	38.000	●
380	38.100	1 1/2	7.00	16.000	23.90	38.100	●
380	38.460		7.00	16.000	23.90	38.460	●
380	38.500	1 33/64	7.10	16.000	23.90	38.500	●
390	39.000		7.10	16.000	23.90	39.000	●
390	39.500		7.20	16.000	23.90	39.500	●
390	40.000		7.30	16.000	23.90	40.000	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA

Guhring no.	4111
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	a
Cutting direction	right-hand
Tolerance	m7
Discount group	141
Techn. data page	106

NEW

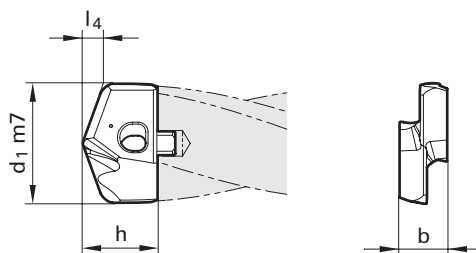



holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
110	11.000		1.80	4.500	7.20	11.000	●
110	11.200		1.80	4.500	7.20	11.200	●
115	11.500		1.80	4.500	7.20	11.500	●
115	11.510	29/64	1.80	4.500	7.20	11.510	●
115	11.700		1.90	4.500	7.20	11.700	●
115	11.800		1.90	4.500	7.20	11.800	●
115	11.910	15/32	1.90	4.500	7.20	11.910	●
120	12.000		1.90	5.000	7.40	12.000	●
120	12.100		1.90	5.000	7.40	12.100	●
120	12.200		1.90	5.000	7.40	12.200	●
120	12.300	31/64	1.90	5.000	7.40	12.300	●
125	12.500		2.00	5.000	7.40	12.500	●
125	12.600		2.00	5.000	7.40	12.600	●
125	12.700	1/2	2.00	5.000	7.40	12.700	●
125	12.800		2.00	5.000	7.40	12.800	●
125	12.900		2.00	5.000	7.40	12.900	●
130	13.000		2.00	5.500	8.20	13.000	●
130	13.100	33/64	2.00	5.500	8.20	13.100	●
130	13.490	17/32	2.10	5.500	8.20	13.490	●
135	13.500		2.10	5.500	8.20	13.500	●
135	13.600		2.10	5.500	8.20	13.600	●
135	13.700		2.10	5.500	8.20	13.700	●
135	13.800		2.20	5.500	8.20	13.800	●
135	13.890	35/64	2.20	5.500	8.20	13.890	●
140	14.000		2.20	6.000	9.40	14.000	●
140	14.100		2.20	6.000	9.40	14.100	●
140	14.290	9/16	2.20	6.000	9.40	14.290	●
140	14.400		2.20	6.000	9.40	14.400	●
145	14.500		2.20	6.000	9.40	14.500	●
145	14.600		2.30	6.000	9.40	14.600	●
145	14.680	37/64	2.40	6.000	9.40	14.680	●
145	14.700		2.30	6.000	9.40	14.700	●
145	14.800		2.30	6.000	9.40	14.800	●
150	15.000		2.30	6.000	9.40	15.000	●
150	15.080	19/32	2.30	6.000	9.40	15.080	●
150	15.100		2.30	6.000	9.40	15.100	●
150	15.200		2.30	6.000	9.40	15.200	●
150	15.300		2.40	6.000	9.40	15.300	●
150	15.480	39/64	2.40	6.000	9.40	15.480	●

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
Ⓐ TiAIN
ⓐ TiAIN nanoA
Ⓐ TiAIN SuperA



Guhring no.	4111
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	a
Cutting direction	right-hand
Tolerance	m7
Discount group	141
Techn. data page	106

NEW

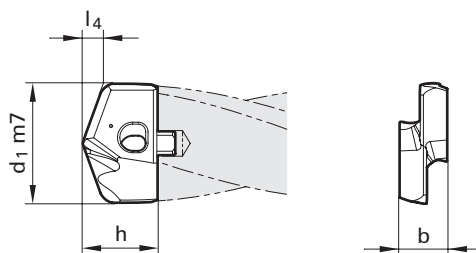

holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
155	15.500		2.40	6.000	9.40	15.500	●
155	15.600		2.40	6.000	9.40	15.600	●
155	15.700		2.40	6.000	9.40	15.700	●
155	15.800		2.40	6.000	9.40	15.800	●
155	15.870	5/8	2.40	6.000	9.40	15.870	●
160	16.000		2.50	7.000	10.60	16.000	●
160	16.270	41/64	2.60	7.000	10.60	16.270	●
165	16.500		2.60	7.000	10.60	16.500	●
165	16.670	21/32	2.60	7.000	10.60	16.670	●
170	17.000		2.70	7.000	10.60	17.000	●
170	17.070	43/64	2.70	7.000	10.60	17.070	●
170	17.460	11/16	2.70	7.000	10.60	17.460	●
175	17.500		2.70	7.000	10.60	17.500	●
175	17.600		2.70	7.000	10.60	17.600	●
175	17.860	45/64	2.80	7.000	10.60	17.860	●
180	18.000		2.80	8.000	12.10	18.000	●
180	18.260	23/32	2.80	8.000	12.10	18.260	●
185	18.500		2.90	8.000	12.10	18.500	●
185	18.650	47/64	2.90	8.000	12.10	18.650	●
190	19.000		2.90	8.000	12.10	19.000	●
190	19.050	3/4	2.90	8.000	12.10	19.050	●
190	19.450	49/64	3.00	8.000	12.10	19.450	●
195	19.500		3.00	8.000	12.10	19.500	●
195	19.600		3.00	8.000	12.10	19.600	●
195	19.840	25/32	3.10	8.000	12.10	19.840	●
200	20.000		3.10	9.000	13.30	20.000	●
200	20.240	51/64	3.10	9.000	13.30	20.240	●
205	20.500		3.10	9.000	13.30	20.500	●
205	20.640	13/16	3.20	9.000	13.30	20.640	●
210	21.000		3.20	9.000	13.30	21.000	●
210	21.030	53/64	3.20	9.000	13.30	21.030	●
210	21.100		3.20	9.000	13.30	21.100	●
210	21.430	27/32	3.30	9.000	13.30	21.430	●
215	21.500		3.30	9.000	13.30	21.500	●
215	21.830	55/64	3.30	9.000	13.30	21.830	●
220	22.000		3.50	10.000	14.80	22.000	●
220	22.220	7/8	3.50	10.000	14.80	22.220	●
225	22.500		3.50	10.000	14.80	22.500	●
225	22.620	57/64	3.50	10.000	14.80	22.620	●





Interchangeable inserts HT 800

T 800 inserts drilling system

Guhring no.	4111
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	a
Cutting direction	right-hand
Tolerance	m7
Discount group	141
Techn. data page	106

NEW

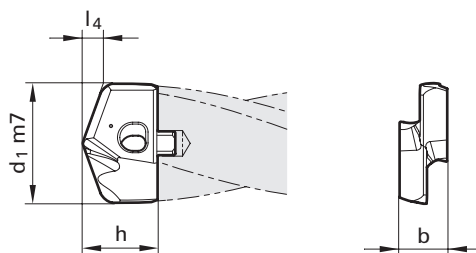

holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
230	23.000		3,60	10.000	14.80	23.000	●
230	23.020	29/32	3,60	10.000	14.80	23.020	●
230	23.420	59/64	3,60	10.000	14.80	23.420	●
235	23.500		3,60	10.000	14.80	23.500	●
235	23.810	15/16	3,70	10.000	14.80	23.810	●
240	24.000		3,80	11.000	15.30	24.000	●
240	24.100		3,80	11.000	15.30	24.100	●
240	24.210	61/64	3,80	11.000	15.30	24.210	●
245	24.500		3,90	11.000	15.30	24.500	●
245	24.610	31/32	3,90	11.000	15.30	24.610	●
250	25.000	63/64	4,00	11.000	15.30	25.000	●
250	25.400	1	4,00	11.000	15.30	25.400	●
255	25.500		4,00	11.000	15.30	25.500	●
255	25.700		4,10	11.000	15.30	25.700	●
260	26.000		4,10	12.000	19.40	26.000	●
260	26.190	1 1/32	4,10	12.000	19.40	26.190	●
265	26.500		4,10	12.000	19.40	26.500	●
265	26.590	1 3/64	4,20	12.000	19.40	26.590	●
270	27.000		4,20	12.000	19.40	27.000	●
275	27.500		4,30	12.000	19.40	27.500	●
275	27.700		4,30	12.000	19.40	27.700	●
275	27.780	1 3/32	4,30	12.000	19.40	27.780	●
280	28.000		4,40	13.000	20.10	28.000	●
280	28.180		4,40	13.000	20.10	28.180	●
285	28.500		4,50	13.000	20.10	28.500	●
285	28.580		4,50	13.000	20.10	28.580	●
290	29.000		4,60	13.000	20.10	29.000	●
290	29.370	1 5/32	4,60	13.000	20.10	29.370	●
295	29.500		4,60	13.000	20.10	29.500	●
300	30.000		4,70	14.000	21.70	30.000	●
300	30.160	1 3/16	4,70	14.000	21.70	30.160	●
305	30.500		4,80	14.000	21.70	30.500	●
305	30.960		4,80	14.000	21.70	30.960	●
310	31.000		4,90	14.000	21.70	31.000	●
315	31.500		4,90	14.000	21.70	31.500	●
315	31.750	1 1/4	4,90	14.000	21.70	31.750	●
320	32.000		5,00	15.000	22.40	32.000	●
320	32.500		5,10	15.000	22.40	32.500	●
320	32.540	1 9/32	5,10	15.000	22.40	32.540	●



bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 A TiAlN
 a TiAlN nanoA
 A TiAlN SuperA



T 800 inserts drilling system

Guhring no.	4111
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	a
Cutting direction	right-hand
Tolerance	m7
Discount group	141
Techn. data page	106

NEW

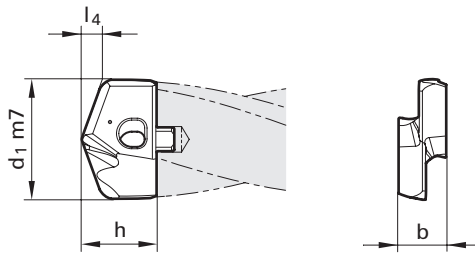



holder size	d1		l4	b	h	Code no.	Availability
	mm	inch					
330	33.000		5.20	15.000	22.40	33.000	●
330	33.340	1 5/16	5.20	15.000	22.40	33.340	●
330	33.500		5.30	15.000	22.40	33.500	●
340	34.000		5.40	15.000	22.40	34.000	●
340	34.130	1 11/32	5.40	15.000	22.40	34.130	●
340	34.500		5.40	15.000	22.40	34.500	●
340	34.930		5.40	15.000	22.40	34.930	●
350	35.000		5.50	15.000	22.40	35.000	●
350	35.500		5.60	15.000	22.40	35.500	●
350	35.720		5.60	15.000	22.40	35.720	●
360	36.000		5.70	16.000	23.20	36.000	●
360	36.500		5.70	16.000	23.20	36.500	●
360	36.510		5.70	16.000	23.20	36.510	●
370	37.000		5.80	16.000	23.20	37.000	●
370	37.310	1 15/32	5.80	16.000	23.20	37.310	●
370	37.500		5.90	16.000	23.20	37.500	●
380	38.000		6.00	16.000	23.20	38.000	●
380	38.100	1 1/2	6.00	16.000	23.20	38.100	●
380	38.500	1 33/64	6.10	16.000	23.20	38.500	●
390	39.000		6.20	16.000	23.20	39.000	●
390	39.500		6.20	16.000	23.20	39.500	●
390	40.000		6.20	16.000	23.20	40.000	●
							●
							●
							●
							●
							●
							●



Countersinking insert HT 800

T 800 inserts drilling system

Guhring no.	7635
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	AL
Surface	
Cutting direction	right-hand
Discount group	142
Techn. data page	106




ISO standard	d	s	R	l	Code no.
	mm	mm	mm	mm	
CPGT0502	5.560	2.380	0.40	5.64	52.040
CPGT0602	6.350	2.380	0.40	6.45	62.040
CPGT09T3	9.525	3.970	0.80	9.67	93.080

Availability

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Guhring no.	7645
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	P
Surface	S
Cutting direction	right-hand
Discount group	142
Techn. data page	106



ISO standard	d	s	R	l	Code no.
	mm	mm	mm	mm	
CPGT0502	5.560	2.380	0.40	5.64	52.040
CPGT0602	6.350	2.380	0.40	6.45	62.040
CPGT09T3	9.525	3.970	0.80	9.67	93.080



Availability
●
●
●



Countersinking insert HT 800

T 800 inserts drilling system

Guhring no.	7632
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K
Surface	A
Cutting direction	neutral
Discount group	142
Techn. data page	106



ISO standard	d	s	R	l	Code no.
	mm	mm	mm	mm	
CPGW0502	5.560	2.380	0.40	5.64	52.040
CPGW0602	6.350	2.380	0.40	6.45	62.040
CPGW09T3	9.525	3.970	0.80	9.67	93.080

Availability
●
●
●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	4915
Standard	Guhring std.
Discount group	114
Techn. data page	



Type	Drive	l1 mm	Torque	Code no.
A	1/4	160.00	0,8...2	2.000
A	1/4	160.00	2...8	8.000
A	1/4	200.00	0,4...14	14.000

Availability
●
●
●



Tool holders for interchangeable inserts RT 800

T 800 inserts drilling system

Guhring no. 5242

Standard Guhring std.

Type RT 800 WP


Drilling depth 3xD

Cooling axial

Cutting direction right-hand

Discount group 140

Techn. data page 106

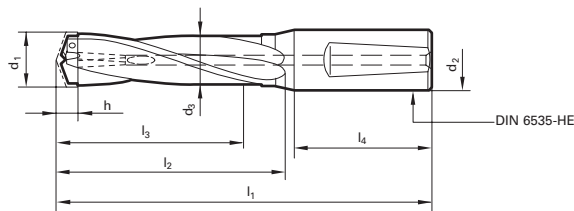

holder size	d1	d2 h6	d3	l1	l2	l3	l4	Code no.
	mm	mm	mm	mm	mm	mm	mm	
0.1	16,00-17,00	20.000	15.700	130.00	74.40	54.00	50.00	17.000
0.1	16,00-17,00	19.050	15.700	130.00	74.40	54.00	50.00	17.005
0.2	17,01-17,99	20.000	16.700	130.00	74.60	54.00	50.00	17.990
0.2	17,01-17,99	19.050	16.700	130.00	74.60	54.00	50.00	17.995
1.1	18,00-19,00	20.000	17.700	138.00	82.70	60.00	50.00	19.000
1.1	18,00-19,00	19.050	17.700	138.00	82.70	60.00	50.00	19.005
1.2	19,01-20,00	20.000	18.700	138.00	82.90	60.00	50.00	20.000
1.2	19,01-20,00	19.050	18.700	138.00	82.90	60.00	50.00	20.005
2.1	20,01-21,00	25.000	19.700	153.00	91.60	66.00	56.00	21.000
2.1	20,01-21,00	25.400	19.700	153.00	91.60	66.00	56.00	21.005
2.2	21,01-22,50	25.000	20.700	153.00	91.80	66.00	56.00	22.500
2.2	21,01-22,50	25.400	20.700	153.00	91.80	66.00	56.00	22.505
3.1	22,51-24,00	25.000	22.200	161.00	99.40	72.00	56.00	24.000
3.1	22,51-24,00	25.400	22.200	161.00	99.40	72.00	56.00	24.005
3.2	24,01-25,50	25.000	23.700	170.00	108.70	78.00	56.00	25.500
3.2	24,01-25,50	25.400	23.700	170.00	108.70	78.00	56.00	25.505
4.1	25,51-27,50	32.000	25.200	182.00	116.00	84.00	60.00	27.500
4.1	25,51-27,50	31.750	25.200	182.00	116.00	84.00	60.00	27.505
4.2	27,51-29,50	32.000	27.200	190.00	124.40	90.00	60.00	29.500
4.2	27,51-29,50	31.750	27.200	190.00	124.40	90.00	60.00	29.505
5.1	29,51-32,00	32.000	29.200	198.00	131.60	96.00	60.00	32.000
5.1	29,51-32,00	31.750	29.200	198.00	131.60	96.00	60.00	32.005
5.2	32,01-34,50	32.000	31.700	206.00	140.10	102.00	60.00	34.500
5.2	32,01-34,50	31.750	31.700	206.00	140.10	102.00	60.00	34.505
6.1	34,51-37,50	32.000	34.000	218.00	151.10	114.00	60.00	37.500
6.1	34,51-37,50	31.750	34.000	218.00	151.10	114.00	60.00	37.505
6.2	37,51-40,50	32.000	37.000	231.00	163.70	120.00	60.00	40.500
6.2	37,51-40,50	31.750	37.000	231.00	163.70	120.00	60.00	40.505

Availability



○ bright
 ◐ steam tempered
 ◑ nitrided lands
 ● nitrided
 ◕ golden brown
 A TiAlN
 a TiAlN nanoA
 A TiAlN SuperA



Tool holders for interchangeable inserts RT 800

T 800 inserts drilling system

Guhring no.

5248

Standard

Guhring std.

Type

RT 800 WP

Drilling depth

7xD

Cooling

axial

Cutting direction


right-hand

Discount group

140

Techn. data page

107

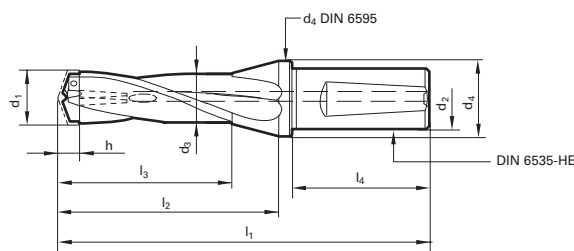

holder size	d1	d2 h6	d3	d4	l1	l2	l3	l4	Code no.
	mm	mm	mm	mm	mm	mm	mm	mm	
0.1	16,00-17,00	20.000	15.700	25.000	202.00	146.40	126.00	50.00	17.000
0.1	16,00-17,00	19.050	15.700	25.000	202.00	146.40	126.00	50.00	17.005
0.2	17,01-17,99	20.000	16.700	25.000	202.00	146.60	126.00	50.00	17.990
0.2	17,01-17,99	19.050	16.700	25.000	202.00	146.60	126.00	50.00	17.995
1.1	18,00-19,00	20.000	17.700	25.000	218.00	162.70	140.00	50.00	19.000
1.1	18,00-19,00	19.050	17.700	25.000	218.00	162.70	140.00	50.00	19.005
1.2	19,01-20,00	20.000	18.700	25.000	218.00	162.90	140.00	50.00	20.000
1.2	19,01-20,00	19.050	18.700	25.000	218.00	162.90	140.00	50.00	20.005
2.1	20,01-21,00	25.000	19.700	31.000	241.00	179.60	154.00	56.00	21.000
2.1	20,01-21,00	25.400	19.700	31.000	241.00	179.60	154.00	56.00	21.005
2.2	21,01-22,50	25.000	20.700	31.000	241.00	179.80	154.00	56.00	22.500
2.2	21,01-22,50	25.400	20.700	31.000	241.00	179.80	154.00	56.00	22.505
3.1	22,51-24,00	25.000	22.200	31.000	257.00	195.40	168.00	56.00	24.000
3.1	22,51-24,00	25.400	22.200	31.000	257.00	195.40	168.00	56.00	24.005
3.2	24,01-25,50	25.000	23.700	31.000	274.00	212.70	182.00	56.00	25.500
3.2	24,01-25,50	25.400	23.700	31.000	274.00	212.70	182.00	56.00	25.505
4.1	25,51-27,50	32.000	25.200	38.000	294.00	228.00	196.00	60.00	27.500
4.1	25,51-27,50	31.750	25.200	38.000	294.00	228.00	196.00	60.00	27.505
4.2	27,51-29,50	32.000	27.200	38.000	310.00	244.40	210.00	60.00	29.500
4.2	27,51-29,50	31.750	27.200	38.000	310.00	244.40	210.00	60.00	29.505
5.1	29,51-32,00	32.000	29.200	38.000	326.00	259.60	224.00	60.00	32.000
5.1	29,51-32,00	31.750	29.200	38.000	326.00	259.60	224.00	60.00	32.005
5.2	32,01-34,50	32.000	31.700	38.000	342.00	276.10	238.00	60.00	34.500
5.2	32,01-34,50	31.750	31.700	38.000	342.00	276.10	238.00	60.00	34.505
6.1	34,51-37,50	32.000	34.000	38.000	366.00	299.10	266.00	60.00	37.500
6.1	34,51-37,50	31.750	34.000	38.000	366.00	299.10	266.00	60.00	37.505
6.2	37,51-40,50	32.000	37.000	40.500	391.00	323.70	280.00	60.00	40.500
6.2	37,51-40,50	31.750	37.000	40.500	391.00	323.70	280.00	60.00	40.505


Availability



○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA




Guhring no.	2747
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K
Surface	○
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

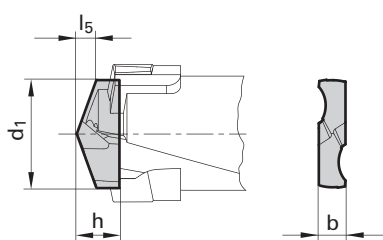

holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
0.1	16.000		3.00	4.500	8.00	16.000	●
0.1	16.500		3.10	4.500	8.00	16.500	●
0.1	17.000		3.10	4.500	8.00	17.000	●
0.2	17.070	43/64	3.20	4.500	8.00	17.070	●
0.2	17.500		3.20	4.500	8.00	17.500	●
0.2	17.860	45/64	3.30	4.500	8.00	17.860	●
1.1	18.000		3.30	5.000	8.00	18.000	●
1.1	18.260	23/32	3.40	5.000	8.00	18.260	●
1.1	18.650	47/64	3.40	5.000	8.00	18.650	●
1.1	19.000		3.50	5.000	8.00	19.000	●
1.2	19.050	3/4	3.50	5.000	8.00	19.050	●
1.2	19.250		3.60	5.000	8.00	19.250	●
1.2	19.450	49/64	3.60	5.000	8.00	19.450	●
1.2	19.500		3.60	5.000	8.00	19.500	●
1.2	19.840	25/32	3.70	5.000	8.00	19.840	●
1.2	20.000		3.70	5.000	8.00	20.000	●
2.1	20.500		3.80	5.500	8.80	20.500	●
2.1	20.640	13/16	3.80	5.500	8.80	20.640	●
2.1	21.000		3.90	5.500	8.80	21.000	●
2.2	21.030	53/64	3.90	5.500	8.80	21.030	●
2.2	21.430	27/32	3.90	5.500	8.80	21.430	●
2.2	21.830	55/64	4.00	5.500	8.80	21.830	●
2.2	22.000		4.10	5.500	8.80	22.000	●
2.2	22.220	7/8	4.10	5.500	8.80	22.220	●
3.1	23.420	59/64	4.30	6.300	10.00	23.420	●
3.1	23.500		4.30	6.300	10.00	23.500	●
3.1	24.000		4.40	6.300	10.00	24.000	●
3.2	24.210	61/64	4.50	6.300	10.00	24.210	●
3.2	24.500		4.50	6.300	10.00	24.500	●
3.2	25.000	63/64	4.60	6.300	10.00	25.000	●
3.2	25.500		4.70	6.300	10.00	25.500	●
4.1	26.000		4.80	7.300	11.60	26.000	●
4.1	26.500		4.90	7.300	11.60	26.500	●
4.1	27.000		5.00	7.300	11.60	27.000	●
4.1	27.500		5.10	7.300	11.60	27.500	●
4.2	28.000		5.10	7.300	11.60	28.000	●
5.1	30.000		5.50	8.500	13.60	30.000	●
5.1	30.500		5.60	8.500	13.60	30.500	●
5.1	31.000		5.70	8.500	13.60	31.000	●



Guhring no.	2747
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K
Surface	○
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

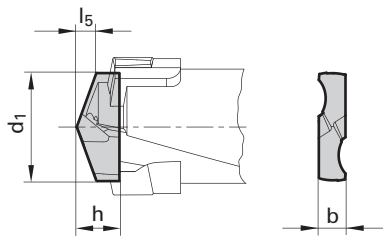


holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
5.1	31.500		5.80	8.500	13.60	31.500	●
5.1	32.000		5.90	8.500	13.60	32.000	●
5.2	32.500		6.00	8.500	13.60	32.500	●
5.2	33.000		6.10	8.500	13.60	33.000	●
5.2	33.500		6.10	8.500	13.60	33.500	●
5.2	34.000		6.20	8.500	13.60	34.000	●
5.2	34.500		6.30	8.500	13.60	34.500	●
6.1	35.000		6.40	10.000	16.00	35.000	●
6.1	36.000		6.60	10.000	16.00	36.000	●
6.1	37.000		6.80	10.000	16.00	37.000	●
6.2	39.000		7.10	10.000	16.00	39.000	●
6.2	40.000		7.30	10.000	16.00	40.000	●

○ bright ● steam tempered ◐ nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	2485
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

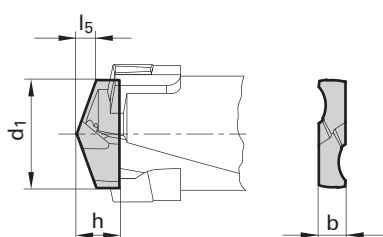


holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
0.1	16.000		3.00	4.500	8.00	16.000	●
0.1	16.270	41/64	3.00	4.500	8.00	16.270	●
0.1	16.500		3.10	4.500	8.00	16.500	●
0.1	16.670	21/32	3.10	4.500	8.00	16.670	●
0.1	17.000		3.10	4.500	8.00	17.000	●
0.2	17.070	43/64	3.20	4.500	8.00	17.070	●
0.2	17.460	11/16	3.20	4.500	8.00	17.460	●
0.2	17.500		3.20	4.500	8.00	17.500	●
0.2	17.860	45/64	3.30	4.500	8.00	17.860	●
1.1	18.000		3.30	5.000	8.00	18.000	●
1.1	18.260	23/32	3.40	5.000	8.00	18.260	●
1.1	18.500		3.40	5.000	8.00	18.500	●
1.1	18.650	47/64	3.40	5.000	8.00	18.650	●
1.1	19.000		3.50	5.000	8.00	19.000	●
1.2	19.050	3/4	3.50	5.000	8.00	19.050	●
1.2	19.250		3.60	5.000	8.00	19.250	●
1.2	19.450	49/64	3.60	5.000	8.00	19.450	●
1.2	19.500		3.60	5.000	8.00	19.500	●
1.2	19.840	25/32	3.70	5.000	8.00	19.840	●
1.2	20.000		3.70	5.000	8.00	20.000	●
2.1	20.240	51/64	3.70	5.500	8.80	20.240	●
2.1	20.500		3.80	5.500	8.80	20.500	●
2.1	20.640	13/16	3.80	5.500	8.80	20.640	●
2.1	21.000		3.90	5.500	8.80	21.000	●
2.2	21.030	53/64	3.90	5.500	8.80	21.030	●
2.2	21.430	27/32	3.90	5.500	8.80	21.430	●
2.2	21.500		4.00	5.500	8.80	21.500	●
2.2	21.830	55/64	4.00	5.500	8.80	21.830	●
2.2	22.000		4.10	5.500	8.80	22.000	●
2.2	22.220	7/8	4.10	5.500	8.80	22.220	●
2.2	22.500		4.10	5.500	8.80	22.500	●
3.1	22.620	57/64	4.20	6.300	10.00	22.620	●
3.1	23.000		4.20	6.300	10.00	23.000	●
3.1	23.020	29/32	4.20	6.300	10.00	23.020	●
3.1	23.420	59/64	4.30	6.300	10.00	23.420	●
3.1	23.500		4.30	6.300	10.00	23.500	●
3.1	23.810	15/16	4.40	6.300	10.00	23.810	●
3.1	24.000		4.40	6.300	10.00	24.000	●
3.2	24.210	61/64	4.50	6.300	10.00	24.210	●



Interchangeable inserts RT 800

T 800 inserts drilling system

Guhring no.	2485
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	F
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

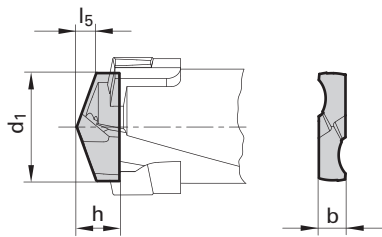


holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
3.2	24.500		4.50	6.300	10.00	24.500	●
3.2	24.610	31/32	4.50	6.300	10.00	24.610	●
3.2	25.000	63/64	4.60	6.300	10.00	25.000	●
3.2	25.400	1	4.70	6.300	10.00	25.400	●
3.2	25.500		4.70	6.300	10.00	25.500	●
4.1	26.000		4.80	7.300	11.60	26.000	●
4.1	26.500		4.90	7.300	11.60	26.500	●
4.1	27.000		5.00	7.300	11.60	27.000	●
4.1	27.500		5.10	7.300	11.60	27.500	●
4.2	28.000		5.10	7.300	11.60	28.000	●
4.2	28.500		5.20	7.300	11.60	28.500	●
4.2	29.000		5.30	7.300	11.60	29.000	●
4.2	29.500		5.40	7.300	11.60	29.500	●
5.1	30.000		5.50	8.500	13.60	30.000	●
5.1	30.500		5.60	8.500	13.60	30.500	●
5.1	31.000		5.70	8.500	13.60	31.000	●
5.1	31.500		5.80	8.500	13.60	31.500	●
5.1	32.000		5.90	8.500	13.60	32.000	●
5.2	32.500		6.00	8.500	13.60	32.500	●
5.2	33.000		6.10	8.500	13.60	33.000	●
5.2	33.500		6.10	8.500	13.60	33.500	●
5.2	34.000		6.20	8.500	13.60	34.000	●
5.2	34.500		6.30	8.500	13.60	34.500	●
6.1	35.000		6.40	10.000	16.00	35.000	●
6.1	36.000		6.60	10.000	16.00	36.000	●
6.1	37.000		6.80	10.000	16.00	37.000	●
6.1	37.500		6.90	10.000	16.00	37.500	●
6.2	38.000		7.00	10.000	16.00	38.000	●
6.2	39.000		7.10	10.000	16.00	39.000	●
6.2	40.000		7.30	10.000	16.00	40.000	●
6.2	40.500		7.40	10.000	16.00	40.500	●

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 A TiAIN
 a TiAIN nanoA
 A TiAIN SuperA




Guhring no.	1047
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	S
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

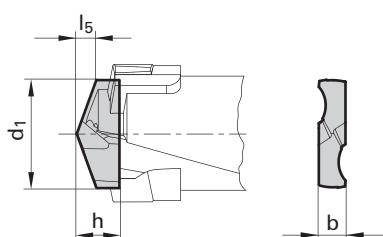

holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
0.1	16.000		3.00	4.500	8.00	16.000	●
0.1	16.270	41/64	3.00	4.500	8.00	16.270	●
0.1	16.500		3.10	4.500	8.00	16.500	●
0.1	16.670	21/32	3.10	4.500	8.00	16.670	●
0.1	17.000		3.10	4.500	8.00	17.000	●
0.2	17.070	43/64	3.20	4.500	8.00	17.070	●
0.2	17.460	11/16	3.20	4.500	8.00	17.460	●
0.2	17.500		3.20	4.500	8.00	17.500	●
0.2	17.860	45/64	3.30	4.500	8.00	17.860	●
1.1	18.000		3.30	5.000	8.00	18.000	●
1.1	18.260	23/32	3.40	5.000	8.00	18.260	●
1.1	18.500		3.40	5.000	8.00	18.500	●
1.1	18.650	47/64	3.40	5.000	8.00	18.650	●
1.1	19.000		3.50	5.000	8.00	19.000	●
1.2	19.050	3/4	3.50	5.000	8.00	19.050	●
1.2	19.250		3.60	5.000	8.00	19.250	●
1.2	19.450	49/64	3.60	5.000	8.00	19.450	●
1.2	19.500		3.60	5.000	8.00	19.500	●
1.2	19.840	25/32	3.70	5.000	8.00	19.840	●
1.2	20.000		3.70	5.000	8.00	20.000	●
2.1	20.240	51/64	3.70	5.500	8.80	20.240	●
2.1	20.500		3.80	5.500	8.80	20.500	●
2.1	20.640	13/16	3.80	5.500	8.80	20.640	●
2.1	21.000		3.90	5.500	8.80	21.000	●
2.2	21.030	53/64	3.90	5.500	8.80	21.030	●
2.2	21.430	27/32	3.90	5.500	8.80	21.430	●
2.2	21.500		4.00	5.500	8.80	21.500	●
2.2	21.830	55/64	4.00	5.500	8.80	21.830	●
2.2	22.000		4.10	5.500	8.80	22.000	●
2.2	22.220	7/8	4.10	5.500	8.80	22.220	●
2.2	22.500		4.10	5.500	8.80	22.500	●
3.1	22.620	57/64	4.20	6.300	10.00	22.620	●
3.1	23.000		4.20	6.300	10.00	23.000	●
3.1	23.020	29/32	4.20	6.300	10.00	23.020	●
3.1	23.420	59/64	4.30	6.300	10.00	23.420	●
3.1	23.500		4.30	6.300	10.00	23.500	●
3.1	23.810	15/16	4.40	6.300	10.00	23.810	●
3.1	24.000		4.40	6.300	10.00	24.000	●
3.2	24.210	61/64	4.50	6.300	10.00	24.210	●

Guhring no.	1047
Standard	Guhring std.
Tool material	Solid carbide
Carbide grade	K/P
Surface	S
Cutting direction	right-hand
Tolerance	
Discount group	141
Techn. data page	107

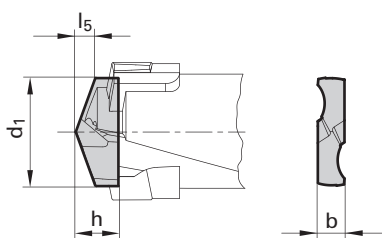

holder size	d1 h7		l5	b	h	Code no.	Availability
	mm	inch					
3.2	24.500		4.50	6.300	10.00	24.500	●
3.2	24.610	31/32	4.50	6.300	10.00	24.610	●
3.2	25.000	63/64	4.60	6.300	10.00	25.000	●
3.2	25.400	1	4.70	6.300	10.00	25.400	●
3.2	25.500		4.70	6.300	10.00	25.500	●
4.1	26.000		4.80	7.300	11.60	26.000	●
4.1	26.500		4.90	7.300	11.60	26.500	●
4.1	27.000		5.00	7.300	11.60	27.000	●
4.1	27.500		5.10	7.300	11.60	27.500	●
4.2	28.000		5.10	7.300	11.60	28.000	●
4.2	28.500		5.20	7.300	11.60	28.500	●
4.2	29.000		5.30	7.300	11.60	29.000	●
4.2	29.500		5.40	7.300	11.60	29.500	●
5.1	30.000		5.50	8.500	13.60	30.000	●
5.1	30.500		5.60	8.500	13.60	30.500	●
5.1	31.000		5.70	8.500	13.60	31.000	●
5.1	31.500		5.80	8.500	13.60	31.500	●
5.1	32.000		5.90	8.500	13.60	32.000	●
5.2	32.500		6.00	8.500	13.60	32.500	●
5.2	33.000		6.10	8.500	13.60	33.000	●
5.2	33.500		6.10	8.500	13.60	33.500	●
5.2	34.000		6.20	8.500	13.60	34.000	●
5.2	34.500		6.30	8.500	13.60	34.500	●
6.1	35.000		6.40	10.000	16.00	35.000	●
6.1	36.000		6.60	10.000	16.00	36.000	●
6.1	37.000		6.80	10.000	16.00	37.000	●
6.1	37.500		6.90	10.000	16.00	37.500	●
6.2	38.000		7.00	10.000	16.00	38.000	●
6.2	39.000		7.10	10.000	16.00	39.000	●
6.2	40.000		7.30	10.000	16.00	40.000	●
6.2	40.500		7.40	10.000	16.00	40.500	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



T 800 inserts drilling system

Guhring no.

4915

Standard

Guhring std.

Discount group

114

Techn. data page



Type	Drive	l1 mm	Torque	Code no.
A	1/4	160.00	1...5	5.001

Availability



bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



T 800 inserts drilling system

Guhring no.
Standard
Discount group
Techn. data page

1612

Guhring std.

140



Torx	Code no.
T6	6.000
T8	8.000
T10	10.000


Availability



- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAIN
- TiAIN nanoA
- TiAIN SuperA

ISO taper holder (DIN 69871, form AD)/HSK-C

Guhring no.	4512
Standard	Guhring std.
Discount group	114
Techn. data page	108

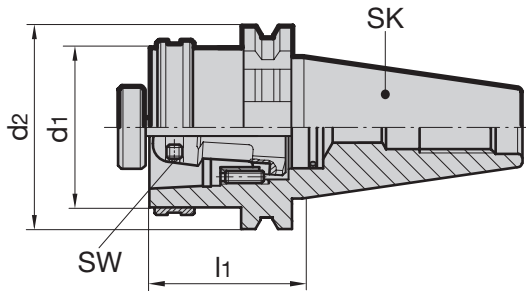


ISO taper size	HSK-C d1 mm	d2 mm	l1 mm	l3 mm	SW mm	kg	Code no.
40	63	63.5	70	19.05	5.0	1.38	40,063
50	63	97.5	40	19.05	5.0	2.73	50,063
50	80	97.5	70	19.05	6.0	3.70	50,080
50	100	97.5	100	19.05	8.0	4.90	50,100
60	100	155.0	40	19.05	8.0	9.70	60,100

Availability
●
●
●
●

Holder with straight shank (VDI) to DIN 69880-1/HSK-C

Guhring no.	4510
Standard	Guhring std.
Discount group	114
Techn. data page	108

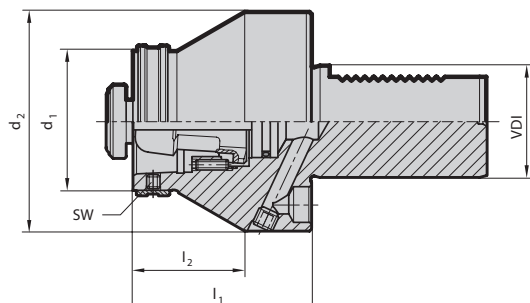


VDI size	HSK-C d1 mm	d2 mm	l1 mm	l2 mm	SW mm	kg	Code no.
40	63	83	80	50	5	2.38	40,063
50	63	98	80	50	5	4.21	50,063
50	80	98	100	70	6	5.00	50,080
60	80	123	100	62	6	8.10	60,080
60	100	123	125	87	8	9.70	60,100

Availability
●
●
●
●



Reductions HSK-C/HSK-A

Guhring no.	4355
Standard	Guhring std.
Discount group	114
Techn. data page	108

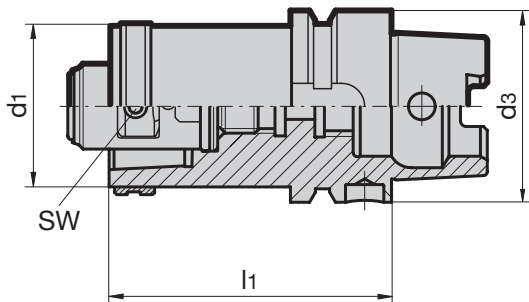


HSK-C	HSK-A		SW		Code no.
d1	d2	l1			
mm	mm	mm		kg	
63	80	100	5	2.69	63,080
63	100	100	5	3.31	63,100
80	100	120	6	5.13	80,100

Availability
●
●
●

Extensions HSK-C/HSK-A

Guhring no.	4549
Standard	Guhring std.
Discount group	114
Techn. data page	108


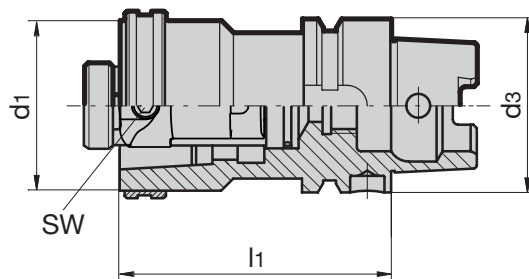


HSK-C	HSK-A		SW		Code no.
d1	d2	l1			
mm	mm	mm		kg	
63	63	100	4	1.84	100,063
63	63	140	5	2.30	140,063
80	80	120	4	3.90	120,080
80	80	160	6	5.40	160,080
100	100	140	5	7.80	140,100
100	100	200	6	10.54	200,100

Availability
●
●
●
●
●

○ bright
 ◐ steam tempered
 ◑ nitrided lands
 ● nitrided
 ● golden brown
 A TiAlN
 a TiAlN nanoA
 A AlTiN SuperA


Guhring no.	4142
Standard	Guhring std.
Flute	15° spiral
Discount group	114
Techn. data page	109

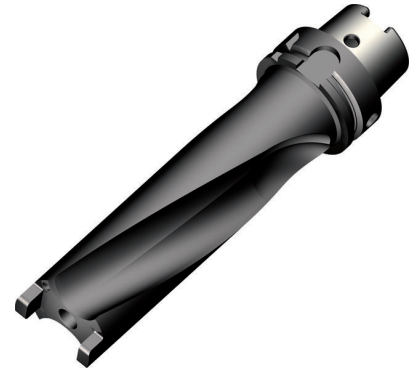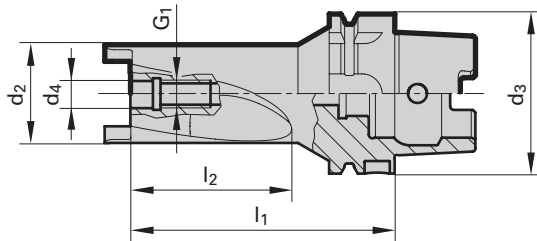

for holder size	d2 mm	HSK-A d3 mm	d4 mm	l1 mm	l2 mm	G1	kg	Code no.
400-490	38.7	63	10.5	105	65	M10	1.2	63,105
400-490	38.7	63	10.5	180	140	M10	1.5	63,180
520/560	50.7	63	12.5	120	88	M12	1.6	63,120
520/560	50.7	63	12.5	210	178	M12	2.4	63,210

Availability	
●	
●	
●	
●	

Guhring no.	4144
Standard	Guhring std.
Flute	without
Discount group	114
Techn. data page	111

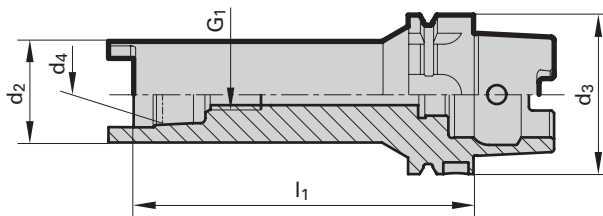

for holder size	d2 mm	HSK-A d3 mm	d4 mm	l1 mm	G1	kg	Code no.
600/650	40	63	24	135	M14	1.6	63,135
600/650	40	63	24	240	M14	2.6	63,240
700-800	48	80	30	160	M16	2.8	80,160
700-800	48	80	30	290	M16	4.5	80,290
850-950	58	100	38	180	M16	4.8	100,180
850-950	58	100	38	330	M16	7.8	100,330

Availability	
●	
●	
●	
●	
●	
●	



Guhring no.

4148

Standard

Guhring std.

Flute


15° spiral

Discount group

114

Techn. data page

109

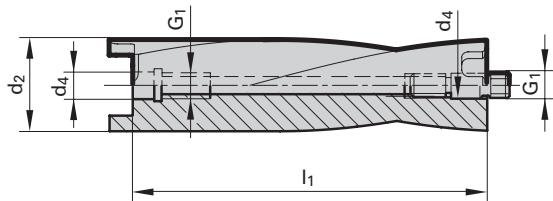

for holder size	d2 mm	d4 mm	l1 mm	G1	kg	Code no.
400-490	38.7	10.5	150	M10	0.8	10,150
520/560	50.7	12.5	180	M12	1.7	12,180

Availability



Guhring no.

4149

Standard

Guhring std.

Flute


without

Discount group

114

Techn. data page

111

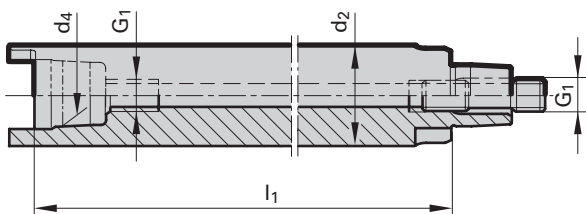

for holder size	d2 mm	d4 mm	l1 mm	G1	kg	Code no.
600/650	40	24	210	M14	1.9	40,210
700-800	48	30	255	M16	3.3	48,255
850-950	58	38	300	M16	5.7	58,300

Availability





Retention spindles (Torx-Screws)


Guhring no.

4164

Standard

Guhring std.

Discount group

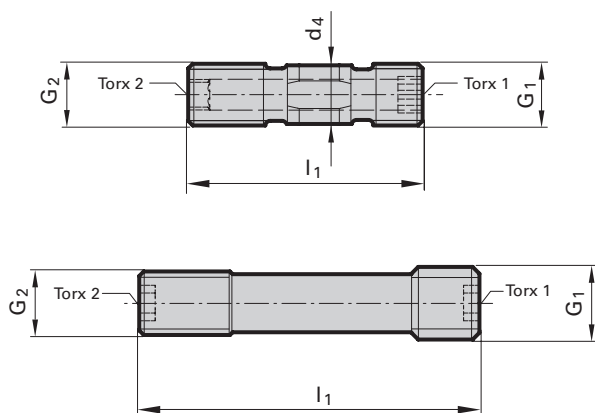

für	d4	l1	Torx 1	Torx 12	G1	G2	Code no.
Träger- Größe	mm	mm					
400-490	10.5	38	T40	T30	M10	M10x1	40,052
520/560	12.5	45	T45	T30	M12	M12x1	52,060
600/650	-	55	T45	T45	M14	M14x1	60,070
700-800	-	65	T45	T45	M16	M14x1	70,085
850-950	-	75	T45	T45	M16	M14x1	85,100

Availability



Torx driver sockets (retention spindles)


Guhring no.

4188


Discount group

114

for drill heads



for basic shanks/extensions



suitable for	Torx	l1	Code no.
	d1	mm	
drill heads	T30	60	30,060
basic shanks/ extensions	T30	210	30,210
drill heads	T45	105	45,105
basic shanks/ extensions	T45	300	45,300

Availability



Torque key

Guhring no.

4915

Discount group

114



suitable for	Type	Drive	l1	Torque	Code no.
			mm	Nm	
drill heads, basic shanks and extensions	C	1/2" ■	480	20-200	200,00


Availability



bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 A TiAIN
 a TiAIN nanoA
 A AiTiN SuperA

Cartridges for indexable inserts

Guhring no.	4160
Standard	Guhring std.
Discount group	114
Techn. data page	109

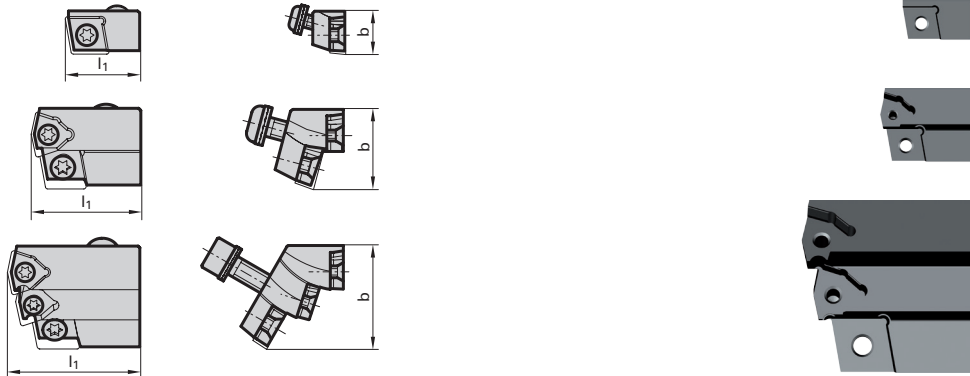


for holder size	for insert no.	b mm	l1 mm	Code no.
400/430	1	11,0	19,5	40,046
460-520	1	14,0	23,6	46,056
560/600	2	18,2	25,4	56,065
650	2	21,0	25,4	65,070
700	2	23,9	29,4	70,075
750	3	23,3	35,5	75,080
800/850	3	26,0	39,0	80,090
900/950	3	30,2	39,0	90,100

Availability
●
●
●
●
●
●
●
●

Clamping screws for interchangeable inserts

Guhring no.	4189
Discount group	114




for holder size	l1 mm	G	Torx	Code no.
400/430	9.4	M3.5	T10	3,500
460-520	10.0	M4	T15	4,000
560 / 600 / 650	12.0	M4.5	T15	4,500

Availability
●
●
●

Fastening screw for cartridges

Guhring no.	4907
Standard	DIN EN ISO 4762
Discount group	114



for holder size	l1 mm	G	SW	Code no.
700	16	M5	SW4	5,161
750	14	M6	SW5	6,140
800/850	16	M6	SW5	6,161
900/950	20	M6	SW5	6,201

Availability
●
●
●
●



Serrated lock washers (Nord-Lock®)

Guhring no.


4104

Standard

Guhring std.

Discount group

114



for holder size	d1 mm	d2 mm	Code no.
400/430	3,9	7,6	3,500
460-520	4,4	7,6	4,000
560	5,4	9,0	5,000
700	5,4	9,0	5,000
750-950	6,5	10,8	6,000

Availability



Distance piece (sets)

Guhring no.


4168

Standard

Guhring std.

Discount group

114



for holder size	l1 mm	b mm	thickness and quantity (2x) s mm	Code no.
400/430	18,5	8,5	0,5/1,0/1,5	40,046
460-520	22,5	9,5	0,5/1,0/1,5/2,0	46,056
560 / 600 / 650	22,5	11,0	0,5/1,0/1,5/2,0	56,070
700	26,5	11,5	0,5/1,0/1,5/2,0	70,075
750	33,0	13,5	0,5/1,0/1,5/2,0	75,080
800/850	36,5	13,5	0,5/1,0/1,5/2,0	80,090
900/950	36,0	15,0	0,5/1,0/1,5/2,0	90,100

Availability





Central interchangeable inserts

Guhring no.	2747	1047	2485
Standard	Guhring std.	Guhring std.	Guhring std.
Tool material	Solid carbide	Solid carbide	Solid carbide
Carbide grade	K	K/P	K/P
Surface finish	○	Ⓢ	ⓕ
Discount group	141	141	141
Techn. data page	112	112	112

for insert size	d1 h7 mm	l5 mm	b mm	h mm
400/560	27.00	4.9	7.3	11.6
460	28.00	5.1	7.3	11.6
430	30.00	5.5	8.5	13.6
490	31.00	5.6	8.5	13.6
600-800/900	32.00	5.8	8.5	13.6
520 / 850 / 950	34.00	6.2	8.5	13.6

Availability		
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●

Clamping screws for central interchangeable inserts

Guhring no.	1071
Discount group	140

for insert size	G	l1 mm	Torx	Code no.
400/460/560	M4x0.5	9.00	T8	4,000
430/490/600-950	M4.5x0.5	10.00	T8	4,500

Availability	
●	●

Torque key

Guhring no.	4915
Discount group	114

Type	Drive	l1 mm	Torque Nm	Code no.
A	1/4"	160	1-5	5,001

Availability	
●	

Torx-Bits

Guhring no.	4917
Discount group	140

for Torx	Drive	l1 mm	Code no.
T8	1/4" ●	25	8,000

Availability	
●	

Torx Screwdriver



Guhring no.	1612
Discount group	140

for Torx	Code no.
T8	8,001

Availability	
●	



Indexable inserts LTT (internal)




Guhring no.	4170	4171	4172	4173
Standard	Guhring std.	Guhring std.	Guhring std.	Guhring std.
Tool material	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Carbide grade	N10	K10	P25	P40
Surface finish	○	○	Ⓢ	Ⓐ
Discount group	142	142	142	142
Techn. data page	112	112	112	112



Insert size	Insert	d1	r	s	Code no.
Größe	description	mm	mm	mm	
05	LTT05T304	8.0	0.4	3.80	53,040
05	LTT05T308	8.0	0.8	3.80	53,080
06	LTT06T304	10.0	0.4	3.80	63,040
06	LTT06T308	10.0	0.8	3.80	63,080

Availability			
●			●
●	●	●	●

CCHX indexable inserts (external)





Guhring no.	4179	4180	4181	4182
Standard	Guhring std.	Guhring std.	Guhring std.	Guhring std.
Tool material	Solid carbide	Solid carbide	Solid carbide	Solid carbide
Carbide grade	N15	K10	P25	M35
Surface finish	○	Ⓢ	Ⓢ	Ⓢ
Discount group	142	142	142	142
Techn. data page	112	112	112	112



Insert size	Insert	d1	r	s	l1	Code no.
Größe	description	mm	mm	mm	mm	
09	CCHX09T308	9.525	0.8	3.97	9.35	93,080
12	CCHX120408	12.700	0.8	4.76	12.50	124,080

Availability			
●	●	●	●
●	●	●	●

Clamping screws with 75°/60° countersink head



Guhring no.	4166	6128
Countersink angle	75°	60°
Discount group	114	122

for insert size	for holder size	Insert no.	l1 mm	G	Torx size	Code no.
05	500/600	2	7.4	M2.5	T8	2,500
05	750-850	4	7.4	M2.5	T8	2,500
06	650/700	2	7.3	M3.5	T10	3,500
06	900/950	4	7.3	M3.5	T10	3,500
09	400/430	2	7.3	M3.5	T10	3,500
09	560-650, 750	2	7.3	M3.5	T10	3,500
12	460-520, 700	2	7.5	M4.5	T15	4,501
12	800-950	2	7.5	M4.5	T15	4,501

Availability	
●	
●	
●	
●	
●	
●	
	●
	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAIN Ⓢ TiAIN nanoA Ⓐ TiAIN SuperA



EXCLUSIVELINE

With ExclusiveLine Guhring provides high-tech tools for especially demanding machining tasks. Benefit from innovative tool geometries, application orientated tool materials as well as coatings to provide new opportunities for your production.



FR 90 chamfer collar

Techn. data page 103

Guhring no.
Discount group



Size	Ø-range	d1	d2	d3	d4	l1	l2	l4	l5	G	M
	mm	mm	mm	mm	mm	mm	mm	mm	mm		
1	5.0	5.0	27	8	30.0	27.5	23.8	37	49	M5	12x1
2	>5- 6.0		28	9	30.0	27.5	23.8			M5	12x1
3	>6- 7.0	6.8	29	10	30.0	27.5	23.8	37	49	M5	12x1
4	>7- 8.0		30	11	30.0	27.5	23.8			M5	12x1
5	>8- 9.0	8.5	31	13	34.0	31.7	27.3	41	53	M5	18x1
6	>9- 10.0		32	14	34.0	31.7	27.3			M5	18x1
7	>10-11.0	10.2	33	15	34.0	32.1	27.3	41	53	M5	18x1
8	>11-12.0		34	16	34.0	32.1	27.3			M5	18x1
10	>13-14.0	14.0	38	19	40.0	37.6	31.8	47	59	M6	24x1,5
11	>14-15.0		39	20	40.0	37.6	31.8			M6	24x1,5
12	>15-16.0	15.5	40	21	40.0	37.6	31.8	47	59	M6	24x1,5
13	>16-17.0		42	23	43.0	43.5	36.8			M6	30x1,5
14	>17-18.0		43	24	43.0	43.5	36.8			M6	30x1,5

Indexable inserts

	Guhring no.	1156	1056
Standard		Guhring std.	Guhring std.
Tool material		Solid carbide	Solid carbide
Carbide grade		K	K/P
Surface finish		○	Ⓢ
Discount group		142	142




Ø-range	Code no.
>4-12,0	4,012
>12-20,0	12,020

Availability
● ●
● ●

Adjusting element


	Guhring no.	4072
Discount group		140



pour size	M	Torx	l1	Code no.	Availability
			mm		
1-14	M4	T8	9.0	4,010	●

Clamping piece

	Guhring no.	1055
Discount group		140



Ø-range	G	Code no.	Availability
d1			
>4-12.0	M2.5	4,012	●
>12-20.0	M2.5	12,020	●


○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAlN Ⓜ TiAlN nanoA Ⓐ AITIN SuperA



Complete

1052


140



Collars

145


140



Clamp. sleeves

1053


140



Adjustment rings

1054

140



Code no.	Availability
1,050	<input type="radio"/>
3,068	<input checked="" type="radio"/>
5,085	<input type="radio"/>
7,102	<input checked="" type="radio"/>
10,140	<input type="radio"/>
12,155	<input type="radio"/>

Code no.	Availability
1,050	<input type="radio"/>
2,060	<input type="radio"/>
3,070	<input type="radio"/>
4,080	<input type="radio"/>
5,090	<input type="radio"/>
6,100	<input type="radio"/>
7,110	<input type="radio"/>
8,120	<input type="radio"/>
10,140	<input type="radio"/>
11,150	<input type="radio"/>
12,160	<input type="radio"/>
13,170	<input type="radio"/>
14,180	<input type="radio"/>

Code no.	Availability
1,050	<input type="radio"/>
3,068	<input type="radio"/>
5,085	<input type="radio"/>
7,102	<input type="radio"/>
10,140	<input type="radio"/>
12,155	<input type="radio"/>

Code no.	Availability
Größe 8	
4,080	<input type="radio"/>
4,080	<input type="radio"/>
4,080	<input type="radio"/>
4,080	<input type="radio"/>
8,080	<input type="radio"/>
8,080	<input type="radio"/>
8,080	<input type="radio"/>
12,080	<input type="radio"/>
12,080	<input type="radio"/>
12,080	<input type="radio"/>
14,080	<input type="radio"/>
14,080	<input type="radio"/>

Code no.	Availability
Größe 20	
4,200	<input type="radio"/>
4,200	<input type="radio"/>
4,200	<input type="radio"/>
4,200	<input type="radio"/>
8,200	<input type="radio"/>
8,200	<input type="radio"/>
8,200	<input type="radio"/>
12,200	<input type="radio"/>
12,200	<input type="radio"/>
12,200	<input type="radio"/>
14,200	<input type="radio"/>
14,200	<input type="radio"/>

Screwdriver

Guhring no.

1612

Discount group

140



pour size	pour Torx	Code no.	Availability
1-14	T8	8,000	<input checked="" type="radio"/>

Clamping screw

Guhring no.

1072

Discount group

140



pour size	G	l1 mm	Torx/SW	Code no.	Availability
1-14	M2.5	6.0	T8	2,500	<input checked="" type="radio"/>
1-14	M5	15.0	SW4	5,000	<input checked="" type="radio"/>
1-14	M6	16.0	SW5	6,000	<input checked="" type="radio"/>


T-handle hexagonal spanner

Guhring no.

4912

Discount group

114




SW	Code no.	Availability
4	4,000	<input checked="" type="radio"/>
5	5,000	<input checked="" type="radio"/>



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability						
mm		inch	mm							
mm	inch		mm							
0.200			19.00	2.50	●	●	●	●		
0.210			19.00	2.50	●	○				
0.220			19.00	2.50	●	○				
0.230			19.00	2.50	●					
0.240			19.00	2.50	●	○		○		
0.250			19.00	3.00	●	●	●			○
0.260			19.00	3.00	●					
0.270			19.00	3.00	●					○
0.280			19.00	3.00	●	○				○
0.290			19.00	3.00	●	○		○		
0.300			19.00	3.00	●	●	●	●	○	
0.310			19.00	4.00	●	●				
0.320			19.00	4.00	●	○				●
0.330			19.00	4.00	●					○
0.340			19.00	4.00	●	○	○	●		○
0.350			19.00	4.00	●	●	●	●		
0.360			19.00	4.00	●			○		○
0.370			19.00	4.00	●			○		
0.380			19.00	4.00	●					
0.390			20.00	5.00	●			○		○
0.400	1/64		20.00	5.00	●	●	●	●	○	○
0.410			20.00	5.00	●	○	○	●		○
0.415			20.00	5.00	○					
0.420			20.00	5.00	●	○		○		○
0.430			20.00	5.00	●			○		○
0.440			20.00	5.00	●	○		○		
0.450			20.00	5.00	●	●	●	●	●	○
0.460			20.00	5.00	●	●	○	●		
0.470			20.00	5.00	●			●		○
0.480			20.00	5.00	●	●		○		
0.490			22.00	6.00	●				○	○
0.500			22.00	6.00	●	●	●	●	●	○
0.510			22.00	6.00	●		○	○		
0.520			22.00	6.00	●	●	●	○		
0.525			22.00	6.00	●					○
0.530			22.00	6.00	●	●		○		○
0.540			24.00	7.00	●			●	○	
0.550			24.00	7.00	●	●	●	●	●	
0.560			24.00	7.00	●	○		○		○

○ bright
○ steam tempered
● nitrided lands
● nitrided
● golden brown
Ⓐ TiAlN
ⓐ TiAlN nanoA
Ⓐ TiAlN SuperA



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability					
mm		inch	mm						
mm	inch		mm	205	206	207	208	209	210
0.570			24.00	●	●	●	●		
0.575			24.00						
0.580			24.00	●			●	○	
0.590			24.00	●				○	○
0.600			24.00	●	●	●	●	●	●
0.610			26.00	●		●	●	●	○
0.620			26.00	●	●	●	●	○	○
0.630			26.00	●		●	○		
0.640			26.00	●	○	●	●	●	
0.650			26.00	●	●	●	●	●	
0.660			26.00	●	●	●	○	●	○
0.670			26.00	●	●		●	○	
0.675			28.00	○					
0.680			28.00	●	●		●	○	
0.690			28.00	●	○		○		
0.700			28.00	●	●	●	●	●	●
0.710			28.00	●	●		●	●	○
0.720			28.00	●	●	●	○	○	○
0.730			28.00	●	●		●	○	●
0.740			28.00	●	●		●	○	○
0.750			28.00	●	●	●	●	●	○
0.760			30.00	●	●				○
0.770			30.00	●	●		○		○
0.775			30.00	●	●		○		
0.780			30.00	●	●		○	○	
0.790	1/32		30.00	●	●	●	●		○
0.800			30.00	●	●	●	●	●	●
0.810			30.00	●	●	●	●	●	●
0.820			30.00	●	●	○	○		
0.825			30.00	●	●				○
0.830			30.00	●	●		●		
0.840			30.00	●	●	●	●		○
0.850			30.00	●	●	●	●	●	○
0.860			32.00	●	○	●	●	○	○
0.870			32.00	●	●	○	●		
0.880			32.00	●	●		○	○	○
0.890			32.00	●	●		●		○
0.900			32.00	●	●	●	●	●	○
0.910			32.00	●	●		●	●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
				●				○	
				●					
	●			●				●	
				●					
				○					
				●					
				●				○	
				●				○	
	●			●				●	
	●			●					
				●					
				●					
				●				○	
	●			●				●	
	●			●					
				●					
				●					
				●					
	●			●				○	
	●			●					

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability							
mm		inch	mm								
0.920			32.00	11.00							
0.930			32.00	11.00							
0.940			32.00	11.00							
0.950			32.00	11.00							
0.960			34.00	12.00							
0.970			34.00	12.00							
0.980			34.00	12.00							
0.990			34.00	12.00							
1.000			34.00	12.00							
1.010			34.00	12.00							
1.020			34.00	12.00							
1.030			34.00	12.00							
1.040			34.00	12.00							
1.050			34.00	12.00							
1.060			34.00	12.00							
1.070			36.00	14.00							
1.080			36.00	14.00							
1.090			36.00	14.00							
1.100			36.00	14.00							
1.110			36.00	14.00							
1.120			36.00	14.00							
1.130			36.00	14.00							
1.140			36.00	14.00							
1.150			36.00	14.00							
1.160			36.00	14.00							
1.165			36.00	14.00							
1.170			36.00	14.00							
1.180			36.00	14.00							
1.190	3/64		38.00	16.00							
1.200			38.00	16.00							
1.210			38.00	16.00							
1.220			38.00	16.00							
1.230			38.00	16.00							
1.240			38.00	16.00							
1.250			38.00	16.00							
1.260			38.00	16.00							
1.270			38.00	16.00							
1.280			38.00	16.00							
1.290			38.00	16.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
				●				○	
	●			●				●	
	●			●					
	●		●	●		●		●	●
	●			●		●			
	●			●		●		○	
	●			●		●		●	
	●			●		●		○	
	●			●		●		○	
	●			●		●		●	○
				●					
	●			●				○	
	●			●					
	●			●		●		○	
	●			●		●		○	
	●			●		●		●	●
	●			●		●			
	○			●					
	●			●		●		●	
	●			○					
	●			●					

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability						
mm		inch	mm							
1.300			38.00	16.00	●	●	●	●	●	○
1.305			38.00	16.00	●					
1.310			38.00	16.00	●			○		
1.320			38.00	16.00	●	●	●	●	○	○
1.330			40.00	18.00	●	●	●			
1.340			40.00	18.00	●					
1.350			40.00	18.00	●	●	●	●		
1.360			40.00	18.00	●					
1.370			40.00	18.00	●	●	●			
1.380			40.00	18.00	●	●	●	○	○	
1.390			40.00	18.00	●			●		
1.400			40.00	18.00	●	●	●	●	●	●
1.410			40.00	18.00	●			○		
1.420			40.00	18.00	●	●	●	●	●	
1.430			40.00	18.00	●	●	●	●		
1.440			40.00	18.00	●	●	○			
1.450			40.00	18.00	●	●	●	●	●	●
1.460			40.00	18.00	●					
1.465			40.00	18.00				○		
1.470			40.00	18.00	●	●		●		
1.480			40.00	18.00	●	●			○	○
1.485			40.00	18.00						
1.490			40.00	18.00	●	●		○		
1.500			40.00	18.00	●	●	●	●	●	●
1.510			43.00	20.00	●	●	●	●	●	●
1.520			43.00	20.00	●	●	●	○	○	○
1.530			43.00	20.00	●	●	●	○		
1.540			43.00	20.00	●	○	●			○
1.550			43.00	20.00	●	●	●	●	●	○
1.560			43.00	20.00	●				○	
1.570			43.00	20.00	●		●		○	
1.580			43.00	20.00	●		○		○	○
1.590	1/16		43.00	20.00	●	●	○	●		
1.600			43.00	20.00	●	●	●	●	●	○
1.610			43.00	20.00	●		●	○	○	
1.620			43.00	20.00	●	●		●	○	
1.630			43.00	20.00	●		●	○	○	○
1.640			43.00	20.00	●			●	●	
1.650			43.00	20.00	●	●	●	●	●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills

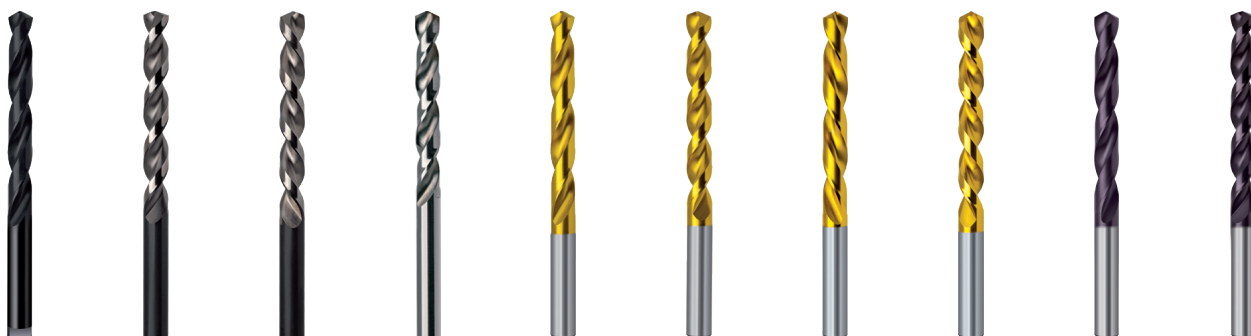


Availability									

TiCN
 Carbo
 Cristall
 FIRE/nanoFIRE
 AlCrN
 TiN
 TiN+
 MolyGlide
 Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability					
mm		inch	mm	mm					
mm	inch		mm	205	206	207	208	209	210
1.660			43.00	●		●	●		
1.670			43.00	●	●			●	○
1.680			43.00	●		○	●	●	
1.690			43.00	●					
1.700			43.00	●	●	●	●	●	○
1.710			46.00	●			○		
1.720			46.00	●	●			○	
1.730			46.00	●	●		○	○	
1.740			46.00	●				○	
1.750			46.00	●	●	●	●	●	○
1.760			46.00	●			○		
1.770			46.00	●		●	○		
1.780			46.00	●	●	○	●	●	
1.790			46.00	●			○		
1.800			46.00	●	●	●	●	●	●
1.810			46.00	●				●	
1.820			46.00	●	●	●	●	○	
1.830			46.00	●			○	●	
1.840			46.00	●			○		
1.850			46.00	●	●	●	●	●	○
1.860			46.00	●				○	
1.870			46.00	●	●			●	
1.880			46.00	●			○		
1.890			46.00	●				○	
1.900			46.00	●	●	●	●	●	○
1.910			49.00	●					
1.920			49.00	●	●	○		○	
1.930			49.00	●		●	○	○	
1.940			49.00	●			○		
1.950			49.00	●	●	●	●	○	○
1.960			49.00	●	○			○	
1.970			49.00	●			○	○	
1.980	5/64		49.00	●	●	●	●	○	
1.990			49.00	●					
2.000			49.00	●	●	●	●	●	●
2.010			49.00	●	●			●	
2.020			49.00	●	○			●	
2.030			49.00	●	●	●		●	
2.040			49.00	●	●	●	○		

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability							
mm		inch	mm								
2.050			49.00	24.00							
2.060			49.00	24.00							
2.070			49.00	24.00							
2.080			49.00	24.00							
2.090			49.00	24.00							
2.100			49.00	24.00							
2.110			49.00	24.00							
2.120			49.00	24.00							
2.130			53.00	27.00							
2.140			53.00	27.00							
2.150			53.00	27.00							
2.170			53.00	27.00							
2.180			53.00	27.00							
2.200			53.00	27.00							
2.210			53.00	27.00							
2.220			53.00	27.00							
2.230			53.00	27.00							
2.240			53.00	27.00							
2.250			53.00	27.00							
2.260			53.00	27.00							
2.270			53.00	27.00							
2.280			53.00	27.00							
2.290			53.00	27.00							
2.300			53.00	27.00							
2.320			53.00	27.00							
2.330			53.00	27.00							
2.340			53.00	27.00							
2.350			53.00	27.00							
2.360			53.00	27.00							
2.370			57.00	30.00							
2.380	3/32		57.00	30.00							
2.390			57.00	30.00							
2.400			57.00	30.00							
2.420			57.00	30.00							
2.430			57.00	30.00							
2.440			57.00	30.00							
2.450			57.00	30.00							
2.460			57.00	30.00							
2.470			57.00	30.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
	●	●		●	●	●			
	○	○		●	●				
	●	●		●	●	○	○	●	●
	●	●		●	●	○			
	●	●		●	○	○	○	○	●
	●	●		●	●				
	●	●		●	●	○			
	●	○	○	●	●				
	●	●		●	●	○	○		
	●	●	●	●	●	●	●	●	●
	●								
	●			●	●	●			
	●			●	●	●			

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability							
mm		inch	mm								
2.480			57.00	30.00							
2.490			57.00	30.00							
2.500			57.00	30.00							
2.510			57.00	30.00							
2.520			57.00	30.00							
2.530			57.00	30.00							
2.540			57.00	30.00							
2.550			57.00	30.00							
2.570			57.00	30.00							
2.580			57.00	30.00							
2.590			57.00	30.00							
2.600			57.00	30.00							
2.610			57.00	30.00							
2.620			57.00	30.00							
2.630			57.00	30.00							
2.640			57.00	30.00							
2.650			57.00	30.00							
2.660			61.00	33.00							
2.670			61.00	33.00							
2.680			61.00	33.00							
2.700			61.00	33.00							
2.710			61.00	33.00							
2.720			61.00	33.00							
2.730			61.00	33.00							
2.750			61.00	33.00							
2.760			61.00	33.00							
2.780	7/64		61.00	33.00							
2.790			61.00	33.00							
2.800			61.00	33.00							
2.820			61.00	33.00							
2.830			61.00	33.00							
2.840			61.00	33.00							
2.850			61.00	33.00							
2.870			61.00	33.00							
2.880			61.00	33.00							
2.900			61.00	33.00							
2.910			61.00	33.00							
2.920			61.00	33.00							
2.930			61.00	33.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability						
mm		inch	mm							
mm	inch		mm							
2.940			61.00	●						○
2.950			61.00	●	●			●		
2.960			61.00	●		●				
2.970			61.00	●				○		●
2.980			61.00	●						
2.990			61.00	●						
3.000			61.00	●	●		●	●	●	●
3.010			65.00	●	●					
3.020			65.00	●	●			○	○	
3.030			65.00	●	●		●	○	●	
3.040			65.00	●	○					
3.050			65.00	●		●	●	●	●	○
3.060			65.00	●	○					
3.070			65.00	●	●		○	○	●	
3.080			65.00	●					○	
3.100			65.00	●	●		●	●	●	●
3.120			65.00	●	●					
3.130			65.00	●						●
3.150			65.00	●	●		●	●	●	
3.160			65.00	●					○	
3.170	1/8		65.00	●	●		●	●	○	○
3.175			65.00						○	
3.180			65.00	●					○	
3.200			65.00	●	●		●	●	●	●
3.220			65.00	●	●			●		
3.230			65.00	●						
3.240			65.00						○	
3.250			65.00	●	●		●	●	●	○
3.260			65.00	●	●		○	●		
3.270			65.00						○	
3.280			65.00					○		○
3.300			65.00	●	●		●	●	●	●
3.320			65.00	●				○	●	
3.330			65.00	○				○		
3.340			65.00					○		
3.350			65.00	●	●		●	●	●	
3.360			70.00	○						
3.370			70.00	●				○		
3.380			70.00	●			○	○	○	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
•	•	•	○	•	•	•	•		
	•								
•	•	•	•	•	•	•	•	•	•
		○		•	•				
	•			•	•	○	•		
	•								
•	•	•		•	•	•	•	•	•
	•	•		•	•				
	•	•		•	•	○	○		
		○							
•	•	•	•	•	•	•	•	•	•
	•								
	•			•	•				
	•	○	•	•	•				
	•	•	○	•	•				
•	•	•	•	•	•	•	•	•	•
			○						
	•	•		•	•	○	○		
	•								

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability						
mm		inch	l1	mm						
3.400			70.00	39.00	●	○	●	●	●	●
3.410			70.00	39.00	●	○				●
3.420			70.00	39.00	●					
3.430			70.00	39.00				○		
3.450			70.00	39.00	●	●	●	●	○	●
3.470			70.00	39.00		○		●	○	
3.500			70.00	39.00	●	●	●	●	●	●
3.520			70.00	39.00	●	●			●	○
3.530			70.00	39.00				○		
3.550			70.00	39.00	●	●	●	●	○	○
3.570	9/64		70.00	39.00	●	●	○	○		
3.580			70.00	39.00					○	
3.600			70.00	39.00	●	●	●	●		○
3.610			70.00	39.00	○					
3.620			70.00	39.00	●			○		
3.630			70.00	39.00					○	
3.650			70.00	39.00	●	●	●	●	○	●
3.660			70.00	39.00	●				○	
3.680			70.00	39.00	●					
3.700			70.00	39.00	●	●	●	●	●	○
3.710			70.00	39.00					○	
3.720			70.00	39.00		○				
3.725			70.00	39.00	●					
3.730			70.00	39.00	●		○		○	
3.750			70.00	39.00	●	●	●	○		○
3.800			75.00	43.00	●	●	●	●		○
3.820			75.00	43.00	●					○
3.830			75.00	43.00	○	●			○	
3.850			75.00	43.00	●	●	●	○		
3.860			75.00	43.00	●					○
3.870			75.00	43.00	○	○		○		
3.880			75.00	43.00		●				
3.900			75.00	43.00	●	●	●	●	○	●
3.910			75.00	43.00	●	●		○		○
3.920			75.00	43.00	●					○
3.930			75.00	43.00	●					
3.940			75.00	43.00	○					
3.950			75.00	43.00	●	●	●	○	○	
3.960			75.00	43.00					●	

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Straight shank twist drills

240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117



Availability

●	●	●	●	●	●	●	○	●	●
	●	●	●	●	●		○		
●	●	●	○	●	●	●		●	●
	●●	●	○	●	●	○	○		
●	●	●	●	●	●		○	●	●
	●	●	○	●	●				
●	●	●	●	●	●	●	●	○	
	●		○	●	●				
●	●	●	●	●	●	●	○	●	○
	●	○		●	●				
●	●	●	○	●	●	●		●	●
	●		○	●	●				
	●		○	●	●				
	●		●	●	○	○			


C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Jobber drills

Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability							
mm		inch	mm								
3.970		5/32	75.00	43.00	●	●	●	○	○		
3.980			75.00	43.00	●						
3.990			75.00	43.00	●						
4.000			75.00	43.00	●	●	●	●	●	●	
4.010			75.00	43.00	●						
4.020			75.00	43.00	●	●					
4.030			75.00	43.00	●		●	○		○	
4.040			75.00	43.00	●	●	●		○		
4.050			75.00	43.00	●	●	●	●	●	○	
4.060			75.00	43.00	●				○		
4.070			75.00	43.00	●	●			●		
4.080			75.00	43.00	●						
4.090			75.00	43.00	●			●			
4.100			75.00	43.00	●	●	●	●	●	○	
4.120			75.00	43.00	●				○		
4.130			75.00	43.00	●			○			
4.150			75.00	43.00	●	●	●	●			
4.200			75.00	43.00	●	●	●	●	●	●	
4.210			75.00	43.00	●						
4.220			75.00	43.00	●		●		○		
4.250			75.00	43.00	●	●	●	●	○	○	
4.270			80.00	47.00	●						
4.280			80.00	47.00	●			○	○		
4.300			80.00	47.00	●	●	●	●	●	●	
4.320			80.00	47.00	●						
4.350			80.00	47.00	●	●	●	○	○		
4.370	11/64		80.00	47.00	●	●	○	○	○		
4.380			80.00	47.00	○						
4.390			80.00	47.00	●		○	○			
4.400			80.00	47.00	●	●	●	●	●	●	
4.420			80.00	47.00	●	○					
4.450			80.00	47.00	●	●		○	○		
4.500			80.00	47.00	●	●	●	●	●	●	
4.520			80.00	47.00	●			○		○	
4.530			80.00	47.00	●			○			
4.550			80.00	47.00	●		●	○	○	○	
4.570			80.00	47.00	●			○			
4.600			80.00	47.00	●	●	●	●	●	○	
4.620			80.00	47.00	●		●				

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● TiAlN
● TiAlN nanoA
● TiAlN SuperA



Straight shank twist drills

240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117




Availability									

TiCN
 Carbo
 Cristall
 FIRE/nanoFIRE
 AlCrN
 TiN
 TiN+
 MolyGlide
 Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability					
mm		inch	mm						
mm	inch		mm	205	206	207	208	209	210
4.650			80.00	●	●	●	○	○	
4.680			80.00				○		
4.700			80.00	●	●	●		●	○
4.720			80.00						○
4.730			80.00	●					
4.750			80.00	●	●	●	○		○
4.760	3/16		86.00	●	●	●	●		
4.770			86.00	○					
4.800			86.00	●	●	●	●	●	
4.830			86.00	●					
4.850			86.00	●	●	●	●	○	○
4.860			86.00	●					
4.870			86.00	●				○	
4.900			86.00	●	●	●	●		○
4.920			86.00	●			○		
4.930			86.00	○			○		
4.950			86.00	●	●		○	●	○
4.970			86.00	●			○		
4.980			86.00	●			●		
5.000			86.00	●	●	●	●	●	●
5.020			86.00	●					○
5.025			86.00	○					
5.030			86.00	●		●			
5.050			86.00	●	●	●		●	
5.060			86.00	●			○		
5.080			86.00	●			○		
5.100			86.00	●	●	●	●	●	●
5.110			86.00	●			●		
5.120			86.00	●					
5.150			86.00	●	●				○
5.160	13/64		86.00	●	●	●	○		
5.180			86.00	●			○		
5.190			86.00	○					
5.200			86.00	●	●	●	●	●	●
5.220			86.00	●			○		
5.250			86.00	●	●	●	●	○	
5.260			86.00	○					
5.300			86.00	●	●	●	●	●	
5.310			93.00	●	●				

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability						
mm		inch	mm							
mm	inch		mm							
5.350			93.00	57.00	●					
5.400			93.00	57.00	●	●			○	●
5.410			93.00	57.00	●					
5.420			93.00	57.00	○					
5.450			93.00	57.00	●	●	●		○	○
5.500			93.00	57.00	●	●	●	●	●	●
5.520			93.00	57.00	●				○	
5.550			93.00	57.00	●		●		○	
5.560	7/32		93.00	57.00	●	●	○	●		○
5.600			93.00	57.00	●	●	●	●		○
5.610			93.00	57.00	●				○	
5.620			93.00	57.00	●					○
5.630			93.00	57.00	○					
5.650			93.00	57.00	●				○	
5.700			93.00	57.00	●	●	●	●		
5.750			93.00	57.00	●	●	●	●		
5.790			93.00	57.00	●			●		
5.800			93.00	57.00	●	●	●	●	●	○
5.850			93.00	57.00	●	●	●	○	○	○
5.900			93.00	57.00	●	●	●	○	●	●
5.920			93.00	57.00	●					
5.930			93.00	57.00	●					
5.940			93.00	57.00	●				○	
5.950	15/64		93.00	57.00	●	●	○	○		○
5.960			93.00	57.00	○					
5.970			93.00	57.00	●					
5.980			93.00	57.00	●					
5.990			93.00	57.00	○					
6.000			93.00	57.00	●	●	●	●	●	●
6.030			101.00	63.00	●					○
6.040			101.00	63.00	●					
6.050			101.00	63.00	●	●	●		●	○
6.080			101.00	63.00	●					●
6.100			101.00	63.00	●	●	●	●	●	○
6.120			101.00	63.00	●				○	
6.130			101.00	63.00	●				○	
6.150			101.00	63.00	●	●	●	●	○	○
6.170			101.00	63.00	●					
6.200			101.00	63.00	●	●	●	●	●	●

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown **A** TiAIN **a** TiAIN nanoA **A** TiAIN SuperA



Straight shank twist drills

240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

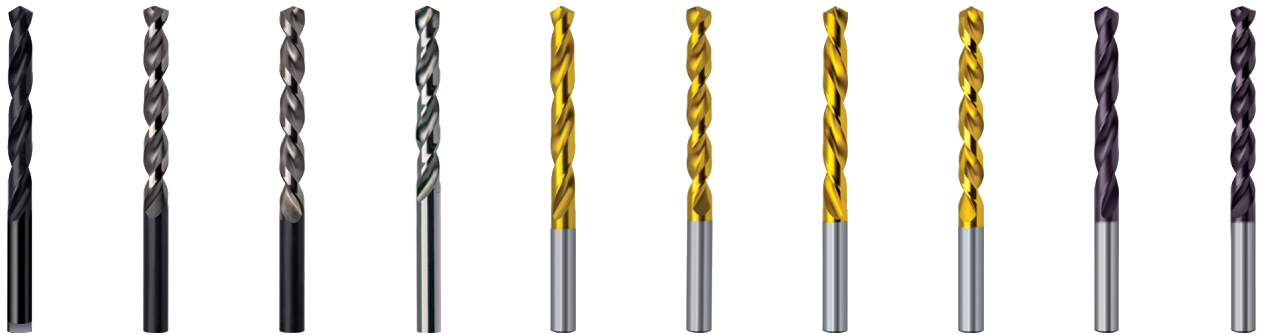


Availability									
●	●●●	●		●●	●●	●○	○	○	○
●	●●	●		●●	●	●	●	●	
	●●			●●	●●	○			
●	●●●	●●	○	●●	●●	●	●	●	○
●	●●	●		●●	●	○	○	○	●
●	●●●	●●		●●	●●		●	●	●
○	●●	○		●●	●	●	○	○	
●	●			○	●		○		
●	●	●		●	●	●	●	●	●
○	●			●●	●				
●	●	●		●	●	●		●	●
	●			●	●				
●	●	●		●	●	●		●	○

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability					
mm	inch	l1	l2						
6.210		101.00	63.00						
6.220		101.00	63.00						
6.250		101.00	63.00						
6.300	1/4	101.00	63.00						
6.350		101.00	63.00						
6.380		101.00	63.00						
6.400		101.00	63.00						
6.450		101.00	63.00						
6.500		101.00	63.00						
6.530		101.00	63.00						
6.550		101.00	63.00						
6.570		101.00	63.00						
6.600		101.00	63.00						
6.630		101.00	63.00						
6.650		101.00	63.00						
6.700	17/64	101.00	63.00						
6.750		109.00	69.00						
6.800		109.00	69.00						
6.810		109.00	69.00						
6.830		109.00	69.00						
6.850		109.00	69.00						
6.880		109.00	69.00						
6.900		109.00	69.00						
6.910		109.00	69.00						
6.950		109.00	69.00						
7.000		109.00	69.00						
7.020		109.00	69.00						
7.030		109.00	69.00						
7.040		109.00	69.00						
7.050		109.00	69.00						
7.070		109.00	69.00						
7.100		109.00	69.00						
7.130		109.00	69.00						
7.140	9/32	109.00	69.00						
7.150		109.00	69.00						
7.200		109.00	69.00						
7.220		109.00	69.00						
7.250		109.00	69.00						
7.290		109.00	69.00						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills



Availability


	●	○		●	●	○			
●	●●	●		●●	●●	○		●	
●	●●	●		●	●	○	○	●	
	●●			●●	●		●	●	
●	●●	●		●●	●●	●		○	○
●	●●	○		●●	●●	●		●	
●	●●	●		●	●	●		●	●
	●			●	●	○		○	
●	●	●		●	●	●	○	●	●
	●			●	●				
	○			●	●				
●	●			●	●		○	●	○
	●	●		●	●	○	○		
●	●	●		●	●	○		●	●
	●			●					
	○			●					

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability						
mm		inch	mm							
mm	inch		mm							
7.300			109.00	69.00	●	●	●	●	●	
7.320			109.00	69.00	●					
7.350			109.00	69.00	●	●				○
7.370			109.00	69.00	●					
7.400			109.00	69.00	●	●	●	●	●	●
7.450			109.00	69.00	●				○	○
7.490			109.00	69.00	○		●	○		
7.500			109.00	69.00	●	●	●	●		○
7.520			117.00	75.00	●			○		
7.540	19/64		117.00	75.00	●	●	○	○		
7.550			117.00	75.00	●			○		
7.580			117.00	75.00	●					
7.600			117.00	75.00	●	●	●	○		○
7.650			117.00	75.00	●					
7.670			117.00	75.00	●					
7.700			117.00	75.00	●	●	●	●		
7.750			117.00	75.00	●				○	
7.800			117.00	75.00	●	●	●	●	○	
7.850			117.00	75.00	●	●		○		
7.900			117.00	75.00	●	●	●	●	○	○
7.940	5/16		117.00	75.00	●	●	●	●		
7.950			117.00	75.00	●					
7.980			117.00	75.00	●					
8.000			117.00	75.00	●	●	●	●	●	●
8.030			117.00	75.00	●		○			
8.050			117.00	75.00	●	●			○	○
8.100			117.00	75.00	●	●	●	●	●	
8.130			117.00	75.00	●					
8.150			117.00	75.00	●					
8.200			117.00	75.00	●	●	●	●	●	
8.250			117.00	75.00	●	●				○
8.300			117.00	75.00	●	●	●	●		○
8.330	21/64		117.00	75.00	●	●		○		
8.350			117.00	75.00	●					
8.400			117.00	75.00	●	●	●	○		
8.430			117.00	75.00	●					
8.450			117.00	75.00	●		○		●	
8.500			117.00	75.00	●	●	●	●	●	
8.550			125.00	81.00	●					

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
	●	●		●	●	○		○	○
	●●	●		●●	●●	○	○	○	○
●	●●	●		●●	●●	○		●	
	●	○		●	●	○	○		
	○								
	●●	○		●●	●●			●	
●	●●			●●	●●			●	
●	●●			●●	●		○	●	
	●●	●		●●	●●	○	○	○	○
	●●	○		●●	●●		○		
●	●●	●		●●	●	●		●	●
	●			●●	○			●	●
●	●●	●		●●	●			●	○
●	●●			●●	●			○	
○	●●			●●				○	
●	●●	○		●●	●			○	
●	●●	●		●●	●●			●	○
●	●	●		●●	●	●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability							
mm		inch	mm								
8.600			125.00	81.00	●	○	○	○	○	○	○
8.610			125.00	81.00	●	○	○	○	○	○	○
8.650			125.00	81.00	●	○	○	○	○	○	○
8.700			125.00	81.00	●	●	●	●	●	●	●
8.730	11/32		125.00	81.00	●	●	○	○	○	○	○
8.750			125.00	81.00	●	○	●	○	○	○	○
8.800			125.00	81.00	●	●	●	○	○	○	○
8.840			125.00	81.00	○	●	○	○	○	○	○
8.850			125.00	81.00	●	○	○	○	○	○	○
8.900			125.00	81.00	●	●	●	○	○	○	○
8.950			125.00	81.00	●	○	○	○	○	○	○
9.000			125.00	81.00	●	●	●	●	●	●	●
9.050			125.00	81.00	●	○	○	○	○	○	○
9.090			125.00	81.00	●	○	○	○	○	○	○
9.100			125.00	81.00	●	●	●	●	●	●	●
9.130	23/64		125.00	81.00	●	●	●	○	○	○	○
9.150			125.00	81.00	●	○	○	○	○	○	○
9.200			125.00	81.00	●	●	●	●	●	●	●
9.250			125.00	81.00	●	●	●	○	○	○	○
9.300			125.00	81.00	●	●	●	●	○	○	○
9.340			125.00	81.00	●	○	○	○	○	○	○
9.350			125.00	81.00	●	○	○	○	○	○	○
9.400			125.00	81.00	●	●	●	○	○	○	○
9.450			125.00	81.00	●	○	○	○	○	○	○
9.500			125.00	81.00	●	●	●	●	○	○	○
9.510			133.00	87.00	○	○	○	○	○	○	○
9.520	3/8		133.00	87.00	●	●	●	○	○	○	○
9.550			133.00	87.00	○	○	○	○	○	○	○
9.560			133.00	87.00	○	○	○	○	○	○	○
9.570			133.00	87.00	○	○	○	○	○	○	○
9.580			133.00	87.00	●	○	○	○	○	○	○
9.600			133.00	87.00	●	●	●	○	○	○	○
9.650			133.00	87.00	○	○	○	○	○	○	○
9.700			133.00	87.00	●	●	●	○	○	○	○
9.750			133.00	87.00	●	●	●	○	○	○	○
9.800			133.00	87.00	●	●	●	○	○	○	○
9.850			133.00	87.00	●	○	○	○	○	○	○
9.900			133.00	87.00	●	●	●	●	○	○	○
9.920	25/64		133.00	87.00	●	○	●	○	○	○	○

○ bright
○ steam tempered
● nitrided lands
● nitrided
● golden brown
Ⓐ TiAlN
ⓐ TiAlN nanoA
Ⓐ TiAlN SuperA



Straight shank twist drills

240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

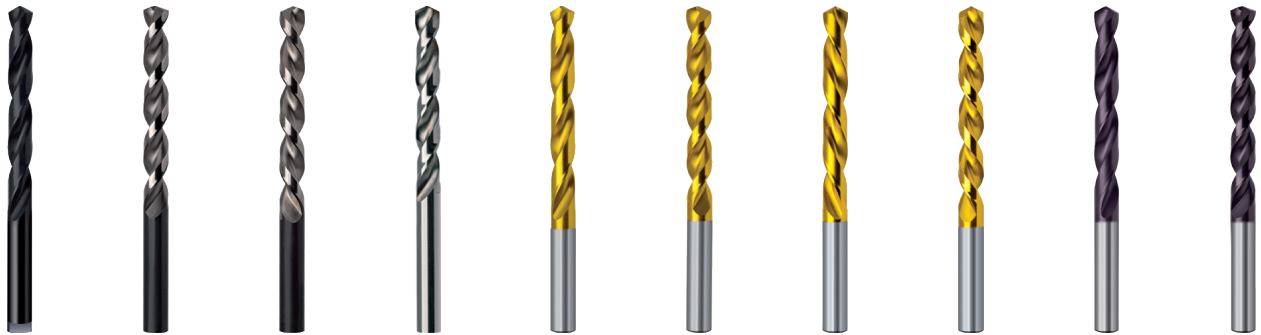


Availability									
●	●			●	●		○	○	
●	●	●		●	●	○		●	○
●	●	●		●	●	○		●	●
○	●			●	●			●	○
●	●	●		●	●			●	
●	●			●	●	○			○
	●			●	●	○	○		
○	●	○		●	○				
○	●			●	●				
○	●	○		●	●	○		●	○
●	●	●		●	●	○	○	●	
	●			○					
●	●	○		●	●	○		○	○
	●	●		●	●			○	●
○	●			●	●	●	○	●	
	●			●	●	●		●	

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability							
mm		inch	mm								
9.950			133.00	87.00	●						
10.000			133.00	87.00	●	●					
10.050			133.00	87.00	●	●					
10.060			133.00	87.00							
10.080			133.00	87.00	●						
10.100			133.00	87.00	●	●					
10.150			133.00	87.00	●	●					
10.200			133.00	87.00	●	●		●			●
10.250			133.00	87.00	●	●					
10.260			133.00	87.00							
10.300			133.00	87.00	●						
10.320	13/32		133.00	87.00	●	●			○		
10.350			133.00	87.00	●						
10.400			133.00	87.00	●						
10.450			133.00	87.00	●						
10.490			133.00	87.00	○						
10.500			133.00	87.00	●	●		●			●
10.550			133.00	87.00	●	●			●		
10.600			133.00	87.00	●	●					
10.700			142.00	94.00	●						○
10.720	27/64		142.00	94.00	●	●			○		
10.750			142.00	94.00	●				○		○
10.800			142.00	94.00	●	●					
10.900			142.00	94.00	●	●		○			
11.000			142.00	94.00	●	●		●			
11.050			142.00	94.00	●	●					
11.100			142.00	94.00	●	●				○	○
11.110	7/16		142.00	94.00	●	●			○		
11.150			142.00	94.00	●						
11.200			142.00	94.00	●	●					
11.250			142.00	94.00	●				○		
11.300			142.00	94.00	●						
11.350			142.00	94.00	○						
11.400			142.00	94.00	●	●			○		
11.500			142.00	94.00	●	●		●			○
11.510	29/64		142.00	94.00	●	●		○	○		
11.520			142.00	94.00	●						
11.600			142.00	94.00	●						
11.650			142.00	94.00	●			○			

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills



Availability


●	●	●		●	●	●		●	
●	●			●	●			○	
●	●	●		●	●	○	○	○	●
	●	●		●	●	○		●	○
	●	●		●				●	
●	●			○	●				
	●	○		●	●			○	○
○	●	●		●	●				
○	●	●		●	●	○			
●	●			●	●	●		●	
○	●	●		●	●			○	
	●			●	●				
	●			●	●			●	
●	●			●	●	●		●	○
	●			●	●			●	

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability					
mm		inch	mm						
mm	inch	mm	mm	205	206	207	208	209	210
11.700			142.00	●	●	●			
11.750			142.00	●					○
11.800			142.00	●		●	●		●
11.900			151.00	●	○	●	○		
11.910	15/32		151.00	●			●		
11.950			151.00	●					○
12.000			151.00	●	●	●	●		●
12.050			151.00	●				○	
12.100			151.00	●	●	●		○	●
12.150			151.00					○	
12.200			151.00	●	●	●		○	●
12.250			151.00	●			○		○
12.300	31/64		151.00	●	●	●		○	
12.400			151.00	●					
12.500			151.00	●	●	●	●		○
12.600			151.00	●		●	○		
12.650			151.00	●					
12.700	1/2		151.00	●	●	●	○		○
12.750			151.00	●			○	○	
12.800			151.00	●	●	○	○	○	○
12.850			151.00	●					
12.900			151.00	●		●			
13.000			151.00	●		●	●		
13.030			151.00	○		●			
13.100	33/64		151.00	●		●		○	
13.200			151.00	●	●	●			○
13.250			160.00	●			○		
13.300			160.00	●				○	
13.400			160.00	●			○		
13.490	17/32		160.00	●					
13.500			160.00	●	●	●		○	
13.530			160.00	○					
13.600			160.00	●			○		
13.700			160.00	●					○
13.750			160.00	●			○		
13.800			160.00	●		●	●	○	
13.890	35/64		160.00	●			●		
13.900			160.00	●					○
14.000			160.00	●	●	●	●		○

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability									
	●	○		●				○	○
	●			●					●
	●	○		●				○	
	●			●	●				
●	●			●	●	●			●
	●			●	●				●
	●	●		●	●				
	●			●	●				
	●	○		●	●		○		
	●	●		●	●		○		
○	●			●	●			○	
	●	○		●				○	
●	●			●	●			●	
	●			●	●				
	●			●	●				
	●			●	●				
	●			●	●				
○	●			●	●		○		
	●			●	●				
	●			●	●				
	●			●	●				●

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115




d1				Availability						
mm		inch	mm							
14.100			169.00	114.00						
14.150			169.00	114.00						
14.200			169.00	114.00						
14.250			169.00	114.00						
14.290	9/16		169.00	114.00						
14.300			169.00	114.00						
14.400			169.00	114.00						
14.450			169.00	114.00						
14.500			169.00	114.00						
14.600			169.00	114.00						
14.680	37/64		169.00	114.00						
14.700			169.00	114.00						
14.750			169.00	114.00						
14.800			169.00	114.00						
14.900			169.00	114.00						
15.000			169.00	114.00						
15.050			178.00	120.00						
15.080	19/32		178.00	120.00						
15.100			178.00	120.00						
15.200			178.00	120.00						
15.250			178.00	120.00						
15.300			178.00	120.00						
15.400			178.00	120.00						
15.480	39/64		178.00	120.00						
15.500			178.00	120.00						
15.600			178.00	120.00						
15.700			178.00	120.00						
15.750			178.00	120.00						
15.800			178.00	120.00						
15.870	5/8		178.00	120.00						
15.900			178.00	120.00						
16.000			178.00	120.00						
16.100			184.00	125.00						
16.200			184.00	125.00						
16.250			184.00	125.00						
16.270	41/64		184.00	125.00						
16.300			184.00	125.00						
16.400			184.00	125.00						
16.500			184.00	125.00						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

Guhring no.	205	206	207	208	209	210
Standard	DIN 338					
Tool material	HSS					
Surface						
Type	N	H	W	N	H	W
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	130	134	134	134	134	138
Techn. data page	114	114	114	114	114	115



d1				Availability							
mm		inch	mm								
16.600			184.00	125.00							
16.670	21/32		184.00	125.00							
16.700			184.00	125.00							
16.750			184.00	125.00							
16.800			184.00	125.00							
16.900			184.00	125.00							
17.000			184.00	125.00							
17.070	43/64		191.00	130.00							
17.200			191.00	130.00							
17.250			191.00	130.00							
17.300			191.00	130.00							
17.400			191.00	130.00							
17.460	11/16		191.00	130.00							
17.500			191.00	130.00							
17.600			191.00	130.00							
17.700			191.00	130.00							
17.750			191.00	130.00							
17.800			191.00	130.00							
17.860	45/64		191.00	130.00							
17.900			191.00	130.00							
18.000			191.00	130.00							
18.100			198.00	135.00							
18.200			198.00	135.00							
18.400			198.00	135.00							
18.500			198.00	135.00							
18.600			198.00	135.00							
18.650	47/64		198.00	135.00							
18.750			198.00	135.00							
18.800			198.00	135.00							
19.000			198.00	135.00							
19.050	3/4		205.00	140.00							
19.100			205.00	140.00							
19.200			205.00	140.00							
19.250			205.00	140.00							
19.500			205.00	140.00							
19.600			205.00	140.00							
19.750			205.00	140.00							
19.800			205.00	140.00							
20.000			205.00	140.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 A TiAIN
 a TiAIN nanoA
 A TiAIN SuperA



240	549	550	560	651	652	664	665	2456	2457
DIN 338									
HSS									
●			○	● ^S	● ^S	● ^S	● ^S	● ^F	● ^F
N	GT 100	GT 100	N	N	GT 100	N	GT 100	N	GT 100
right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
132	136	138	138	131	137	139	139	135	137
115	115	115	115	116	116	116	116	116	117

Straight shank twist drills




Availability

●
●
○
●
●
●
○
●



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0/2,36$	$>0/6,00$			$>0/2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118




d1				Availability	
mm	inch	l1	l2		
0.200		19.00	2.50	●	●
0.210		19.00	2.50	●	
0.220		19.00	2.50	●	
0.230		19.00	2.50	●	
0.250		19.00	3.00	●	
0.260		19.00	3.00	●	
0.270		19.00	3.00	●	
0.280		19.00	3.00	●	
0.300		19.00	3.00	●	●
0.310		19.00	4.00	●	
0.320		19.00	4.00	●	
0.330		19.00	4.00	●	
0.340		19.00	4.00	○	
0.350		19.00	4.00	●	
0.360		19.00	4.00	●	●
0.370		19.00	4.00	●	
0.380		19.00	4.00	●	○
0.390		20.00	5.00	●	○
0.400	1/64	20.00	5.00	●	●
0.410		20.00	5.00	●	
0.420		20.00	5.00	●	
0.430		20.00	5.00	●	
0.440		20.00	5.00	●	●
0.450		20.00	5.00	●	●
0.460		20.00	5.00	●	
0.470		20.00	5.00	●	
0.480		20.00	5.00	●	●
0.490		22.00	6.00	●	
0.500		22.00	6.00	●	○
0.510		22.00	6.00	○	●
0.520		22.00	6.00	●	
0.530		22.00	6.00	●	●
0.540		24.00	7.00	●	
0.550		24.00	7.00	●	●
0.560		24.00	7.00	●	●
0.570		24.00	7.00	●	●
0.580		24.00	7.00	●	●
0.590		24.00	7.00	●	○
0.600		24.00	7.00	●	○

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface						
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118




d1				Availability							
mm		inch	mm								
0.610			26.00	8.00	●						
0.620			26.00	8.00	●	○					
0.630			26.00	8.00		○					
0.640			26.00	8.00	●						
0.650			26.00	8.00	●	○					●
0.660			26.00	8.00	●						
0.670			26.00	8.00	●						
0.680			28.00	9.00	●						
0.700			28.00	9.00	●	●					●
0.710			28.00	9.00	●						
0.720			28.00	9.00	●						
0.730			28.00	9.00	●						
0.740			28.00	9.00	●						
0.750			28.00	9.00	●	○					●
0.760			30.00	10.00	○						
0.770			30.00	10.00	●						
0.780			30.00	10.00	●	○					
0.790	1/32		30.00	10.00	●						
0.800			30.00	10.00	●	●					●
0.810			30.00	10.00	●						
0.820			30.00	10.00	●	○					
0.830			30.00	10.00	●						
0.840			30.00	10.00	●						
0.850			30.00	10.00	●						●
0.860			32.00	11.00	●						
0.870			32.00	11.00	●						
0.880			32.00	11.00	●						○
0.887			32.00	11.00	●						
0.890			32.00	11.00	●						
0.900			32.00	11.00	●						●
0.910			32.00	11.00	●	○					
0.920			32.00	11.00	●	○					●
0.930			32.00	11.00	●	●					
0.940			32.00	11.00	●						●
0.950			32.00	11.00	●	○					●
0.960			34.00	12.00	●						
0.970			34.00	12.00	●						
0.980			34.00	12.00	●	●					
0.990			34.00	12.00	●						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface						
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability						
mm		inch	mm							
1.000			34.00	12.00	●	●	●	●	●	●
1.010			34.00	12.00	●	●	●	●	●	●
1.020			34.00	12.00	●	●	●	○	●	●
1.025			34.00	12.00	●	●	○	●	●	●
1.030			34.00	12.00	●	○	●	●	●	●
1.040			34.00	12.00	●	●	○	●	●	●
1.050			34.00	12.00	●	○	●	●	●	●
1.070			36.00	14.00	●	●	●	●	●	●
1.080			36.00	14.00	●	○	●	●	●	●
1.090			36.00	14.00	●	●	●	●	●	●
1.100			36.00	14.00	●	●	●	●	●	●
1.120			36.00	14.00	●	●	●	●	●	●
1.130			36.00	14.00	●	●	●	●	●	●
1.140			36.00	14.00	●	●	●	●	●	●
1.150			36.00	14.00	●	○	●	●	●	●
1.160			36.00	14.00	●	●	●	●	●	●
1.170			36.00	14.00	●	●	●	●	●	●
1.180			36.00	14.00	●	○	●	●	●	●
1.190	3/64		38.00	16.00	●	●	●	●	●	●
1.200			38.00	16.00	●	●	●	●	●	●
1.210			38.00	16.00	●	○	●	●	●	●
1.220			38.00	16.00	●	●	●	●	●	●
1.230			38.00	16.00	●	○	●	●	●	●
1.250			38.00	16.00	●	●	●	●	●	●
1.260			38.00	16.00	○	●	●	●	●	●
1.270			38.00	16.00	●	●	●	●	●	●
1.280			38.00	16.00	●	●	●	●	●	●
1.290			38.00	16.00	●	●	●	●	●	●
1.300			38.00	16.00	●	●	●	●	●	●
1.310			38.00	16.00	●	●	●	●	●	●
1.320			38.00	16.00	●	○	●	○	●	○
1.330			40.00	18.00	●	○	●	●	●	●
1.350			40.00	18.00	●	●	●	●	●	●
1.360			40.00	18.00	●	●	●	●	●	●
1.370			40.00	18.00	●	●	●	●	●	●
1.380			40.00	18.00	●	●	●	●	●	●
1.390			40.00	18.00	●	●	●	●	●	●
1.400			40.00	18.00	●	●	●	●	●	●
1.410			40.00	18.00	●	●	●	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAN ● TiAN nanoA ● TiAN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSC0								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120




Availability								
●			●	●	●	●		●
●								
○								
●								
●			●	●	●	●	○	●
●								
●			●	●	○	●	●	●
●								
●			●	●	●	●	○	●
●								
●			●	●	●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSC0					
Surface						
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability							
mm		inch	mm								
1.420			40.00	18.00							
1.430			40.00	18.00							
1.440			40.00	18.00							
1.450			40.00	18.00							
1.460			40.00	18.00							
1.470			40.00	18.00							
1.480			40.00	18.00							
1.490			40.00	18.00							
1.500			40.00	18.00							
1.510			43.00	20.00							
1.520			43.00	20.00							
1.530			43.00	20.00							
1.540			43.00	20.00							
1.550			43.00	20.00							
1.560			43.00	20.00							
1.570			43.00	20.00							
1.580			43.00	20.00							
1.590	1/16		43.00	20.00							
1.600			43.00	20.00							
1.610			43.00	20.00							
1.620			43.00	20.00							
1.630			43.00	20.00							
1.640			43.00	20.00							
1.650			43.00	20.00							
1.660			43.00	20.00							
1.670			43.00	20.00							
1.680			43.00	20.00							
1.700			43.00	20.00							
1.710			46.00	22.00							
1.720			46.00	22.00							
1.730			46.00	22.00							
1.740			46.00	22.00							
1.750			46.00	22.00							
1.760			46.00	22.00							
1.780			46.00	22.00							
1.790			46.00	22.00							
1.800			46.00	22.00							
1.810			46.00	22.00							
1.820			46.00	22.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120

Straight shank twist drills



Availability


●								
●								
●			●	●	●	●	●	●
●					○			
●								
●			●	●	●	●	●	●
●								
●					○			
●			●	●	●	●	●	●
●								
●			●	●	●	●	●	●
●								
●			●	●	●	●	●	●

C TiCN
Cb Carbo
D Cristall
F FIRE/nanoFIRE
P AlCrN
S TiN
S+ TiN+
M MolyGlide
Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0/2,36$	$>0/6,00$			$>0/2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability					
mm		inch	mm						
mm	inch	mm	mm	305	308	605	608	622	657
1.830			46.00	22.00	●				
1.840			46.00	22.00	●				
1.850			46.00	22.00	●	●		●	●
1.860			46.00	22.00	●				
1.900			46.00	22.00	●	●	○	●	●
1.910			49.00	24.00	●				
1.920			49.00	24.00				●	
1.930			49.00	24.00	●	●		●	
1.950			49.00	24.00	●	●	○	●	●
1.960			49.00	24.00	●			○	
1.970			49.00	24.00	●				
1.980	5/64		49.00	24.00	●	○		●	●
1.990			49.00	24.00	●			●	
2.000			49.00	24.00	●	●	●	●	●
2.010			49.00	24.00	●				
2.020			49.00	24.00	●				
2.030			49.00	24.00	●				
2.040			49.00	24.00	●				
2.050			49.00	24.00	●	○		●	●
2.060			49.00	24.00	●	○		●	
2.080			49.00	24.00	●	○		●	
2.100			49.00	24.00	●	●		●	●
2.120			49.00	24.00	●			●	
2.150			53.00	27.00	●	●	●	●	●
2.180			53.00	27.00	●	●		●	
2.200			53.00	27.00	●	●		●	●
2.230			53.00	27.00	●				
2.250			53.00	27.00	●	○		●	●
2.260			53.00	27.00	●	●		●	●
2.300			53.00	27.00	●	●		●	●
2.320			53.00	27.00	●				
2.350			53.00	27.00	●	●		●	●
2.370			57.00	30.00	●	○		●	
2.380	3/32		57.00	30.00	●	●		●	●
2.400			57.00	30.00	●	○	○	●	●
2.420			57.00	30.00	●			●	
2.440			57.00	30.00	●			●	●
2.450			57.00	30.00	●		●		
2.470			57.00	30.00	●				

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120

Straight shank twist drills



Availability


●								
●			●	●	●	●	○	●
●								
●						●		○
●			●	●	●	●	●	●
●								
●						○		
●			●	●	●	●	●	●
●			●	●	●	●	●	●
●			●	●	○	●	●	●
●						○		
●			●	●	●	●	●	●
●								

C TiCN
Cb Carbo
D Cristall
F FIRE/nanoFIRE
P AlCrN
S TiN
S+ TiN+
M MolyGlide
Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0/2,36$	$>0/6,00$			$>0/2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability					
mm		inch	mm						
mm	inch		mm	305	308	605	608	622	657
2.490			57.00	●	○			●	
2.500			57.00	●	●		●	●	●
2.520			57.00	●	○			●	
2.530			57.00	●	●			●	●
2.550			57.00	●	●			●	●
2.580			57.00	●	●			●	●
2.600			57.00	●	●		○	●	●
2.640			57.00	●	○			●	●
2.650			57.00	●				●	●
2.700			61.00	●	○			●	●
2.710			61.00	●	○			●	●
2.750			61.00	●	●		○	●	●
2.780	7/64		61.00	●	●			●	●
2.790			61.00	●	○	○		●	●
2.800			61.00	●	●		○	●	●
2.810			61.00	●				●	●
2.820			61.00	●	○			●	●
2.850			61.00	●	●			●	●
2.870			61.00	●	○			●	●
2.890			61.00	○				●	●
2.900			61.00	●	○			●	●
2.920			61.00	●				●	●
2.950			61.00	●	○			●	●
2.970			61.00	●				●	●
3.000			61.00	●	●		●	●	●
3.020			65.00	●				●	●
3.030			65.00	●	○			●	●
3.050			65.00	●	○		○	●	●
3.100			65.00	●	○			●	●
3.150			65.00	●	●			●	●
3.170	1/8		65.00	●	●			●	●
3.200			65.00	●	○			●	●
3.250			65.00	●				●	●
3.260			65.00	●				●	●
3.300			65.00	●	●		●	●	●
3.320			65.00	●			○	●	●
3.330			65.00	○				●	●
3.350			65.00	●	○		○	●	●
3.400			70.00	●	○		●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120



Availability


●			●	●	●	●	●	●
●								
●			●	●	●	●		●
●			●	●	●	●	●	●
●					○			○
●			●	●	●	●	●	●
●								
●			●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	○	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●		●	●	●	●	○	●

C TiCN
Cb Carbo
D Cristall
F FIRE/nanoFIRE
P AlCrN
S TiN
S+ TiN+
M MolyGlide
Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0/2,36$	$>0/6,00$			$>0/2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability								
mm		inch	mm									
3.420			70.00									
3.450			70.00									
3.500			70.00									
3.530			70.00									
3.550			70.00									
3.570	9/64		70.00									
3.600			70.00									
3.650			70.00									
3.660			70.00									
3.700			70.00									
3.730			70.00									
3.750			70.00									
3.790			75.00									
3.800			75.00									
3.850			75.00									
3.860			75.00									
3.900			75.00									
3.910			75.00									
3.920			75.00									
3.950			75.00									
3.970	5/32		75.00									
3.980			75.00									
3.990			75.00									
4.000			75.00									
4.020			75.00									
4.030			75.00									
4.040			75.00									
4.050			75.00									
4.070			75.00									
4.090			75.00									
4.100			75.00									
4.120			75.00									
4.150			75.00									
4.170			75.00									
4.200			75.00									
4.220			75.00									
4.250			75.00									
4.300			80.00									
4.330			80.00									

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120



Availability


●	●	●	●	●	●	●	●	●
●	○	○	○	●	●	●	○	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	○	●
●	○	●			●			●
●	●	●	●	●	●	●	●	●
●	●	●	○					
●	●	○	●	●	●	●	●	●
●	●	●	●	●	○	●	●	●
●	●	●	●	●	●	●	○	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	>0/2,36	>0/6,00			>0/2,36	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability					
mm		inch	mm						
mm	inch	mm	mm	305	308	605	608	622	657
4.350			80.00						
4.370	11/64		80.00						
4.390			80.00						
4.400			80.00						
4.450			80.00						
4.500			80.00						
4.550			80.00						
4.570			80.00						
4.600			80.00						
4.620			80.00						
4.650			80.00						
4.700			80.00						
4.750			80.00						
4.760	3/16		86.00						
4.790			86.00						
4.800			86.00						
4.830			86.00						
4.850			86.00						
4.900			86.00						
4.920			86.00						
4.950			86.00						
4.980			86.00						
5.000			86.00						
5.020			86.00						
5.030			86.00						
5.050			86.00						
5.060			86.00						
5.100			86.00						
5.110			86.00						
5.150			86.00						
5.160	13/64		86.00						
5.180			86.00						
5.200			86.00						
5.220			86.00						
5.250			86.00						
5.300			86.00						
5.310			93.00						
5.400			93.00						
5.410			93.00						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120



Availability

●	○	●			●			
●		○	●	●	●	●		●
●	●	●	●	●	●	●	●	●
●		○	●	●	●	●		●
●	●	○	●	●	●	●	○	●
●	○	●			●			●
●	●	○	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●	●	○	●	●	○			
●	●	●	●	●	●	●		●
●		●			●			●
●	●	●	●	●	●	●	●	●
●	●	○	●	●	●	●		●
●	○	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Jobber drills

Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$\frac{+0}{-2,36}$	$\frac{+0}{-6,00}$			$\frac{+0}{-2,36}$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability						
mm		inch	mm							
5.450			93.00	57.00						
5.500			93.00	57.00						
5.550			93.00	57.00						
5.560	7/32		93.00	57.00						
5.570			93.00	57.00						
5.580			93.00	57.00						
5.600			93.00	57.00						
5.610			93.00	57.00						
5.650			93.00	57.00						
5.700			93.00	57.00						
5.750			93.00	57.00						
5.790			93.00	57.00						
5.800			93.00	57.00						
5.850			93.00	57.00						
5.900			93.00	57.00						
5.940			93.00	57.00						
5.950	15/64		93.00	57.00						
5.990			93.00	57.00						
6.000			93.00	57.00						
6.040			101.00	63.00						
6.050			101.00	63.00						
6.080			101.00	63.00						
6.100			101.00	63.00						
6.150			101.00	63.00						
6.200			101.00	63.00						
6.250			101.00	63.00						
6.300			101.00	63.00						
6.350	1/4		101.00	63.00						
6.400			101.00	63.00						
6.450			101.00	63.00						
6.500			101.00	63.00						
6.530			101.00	63.00						
6.600			101.00	63.00						
6.630			101.00	63.00						
6.650			101.00	63.00						
6.700			101.00	63.00						
6.750	17/64		109.00	69.00						
6.760			109.00	69.00						
6.800			109.00	69.00						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120




Availability								
●	●	●	●	●	●	●	●	●
●	●	●			●			
●		●	●	●	●	●	○	●
●	●	○	○	●	○	●	●	●
○		●	●	●	●	●	●	●
●		○	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	○	●	●	●	●	●	●
●	●		●	●	●	●	●	●
●	●	○	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●		●	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●	●	○	●	●	●	●	●	●
●			●	●	●	●	●	●
●	○		●	●	●	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0.2,36$	$>0.6,00$			$>0.2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability					
mm		inch	mm						
mm	inch	mm	mm	305	308	605	608	622	657
6.850			109.00	69.00	●				
6.900			109.00	69.00	●		○	●	●
6.950			109.00	69.00	●				
7.000			109.00	69.00	●	●	●	●	●
7.030			109.00	69.00	●			●	
7.040			109.00	69.00		○			
7.050			109.00	69.00	●				
7.100			109.00	69.00	●		○	●	●
7.140	9/32		109.00	69.00	●	○	○	●	●
7.200			109.00	69.00	●		●	●	●
7.250			109.00	69.00	●			●	
7.300			109.00	69.00	●		○	●	●
7.370			109.00	69.00	●	○		●	
7.400			109.00	69.00	●	●	○	●	●
7.450			109.00	69.00	●			●	
7.490			109.00	69.00	○	○		●	
7.500			109.00	69.00	●	○	○	●	●
7.540	19/64		117.00	75.00	●	○		●	○
7.600			117.00	75.00	●	○	○	●	●
7.670			117.00	75.00	●	○		●	
7.700			117.00	75.00	●	○	○	●	●
7.750			117.00	75.00	●			●	
7.800			117.00	75.00	●		○	●	●
7.900			117.00	75.00	●	●	○	●	●
7.940	5/16		117.00	75.00	●			●	●
8.000			117.00	75.00	●	●	●	●	●
8.030			117.00	75.00	●	○		●	
8.040			117.00	75.00		○			
8.050			117.00	75.00	●				
8.100			117.00	75.00	●		○	●	●
8.150			117.00	75.00	●				
8.200			117.00	75.00	●			●	●
8.250			117.00	75.00	●				
8.300			117.00	75.00	●	●		●	●
8.330	21/64		117.00	75.00	●	○		●	●
8.400			117.00	75.00	●		○	●	●
8.430			117.00	75.00	●	○		●	
8.500			117.00	75.00	●			●	●
8.550			125.00	81.00			○		○

○ bright ● steam tempered ◐ nitrided lands ● nitrided ● golden brown **A** TiAlN **a** TiAlN nanoA **A** TiAlN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSC0								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120



Availability


●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	○	●	●
●	●	○	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●	○	●	●	●	●	●	○	●
●	●	○	●	●	●	●	●	○
●	●	○	●	●	○	●	○	●
●	●	○	●	●	●	●	●	●
●	●	○	●	●	●	○	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	○	●	●	●	●	●	●
●	○	○	●	●	●	●	●	●
●	○	○	●	●	●	●	○	○
●	○	○	●	●	●	●	○	●
●	●	●	●	●	●	●	●	●

C TiCN
Cb Carbo
D Cristall
F FIRE/nanoFIRE
P AlCrN
S TiN
S+ TiN+
M MolyGlide
Y Signum



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface	$>0/2,36$	$>0/6,00$			$>0/2,36$	S
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118




d1				Availability						
mm		inch	mm							
8.600			125.00	81.00	●	○	●	●	●	●
8.610			125.00	81.00	●	○	●	●	●	●
8.700			125.00	81.00	●	○	●	●	●	●
8.730	11/32		125.00	81.00	●	○	●	●	●	●
8.750			125.00	81.00	●	○	●	○	●	●
8.800			125.00	81.00	●	○	●	○	●	●
8.840			125.00	81.00	●	○	●	●	●	●
8.900			125.00	81.00	●	○	●	●	●	●
9.000			125.00	81.00	●	●	●	●	●	●
9.090			125.00	81.00	○	○	●	○	●	●
9.100			125.00	81.00	●	○	●	○	●	●
9.130	23/64		125.00	81.00	●	○	●	○	●	●
9.200			125.00	81.00	●	○	●	○	○	●
9.250			125.00	81.00	●	○	●	○	○	●
9.300			125.00	81.00	●	○	●	○	●	●
9.340			125.00	81.00	●	○	●	●	●	●
9.400			125.00	81.00	●	○	●	●	●	●
9.500			125.00	81.00	●	○	●	○	●	●
9.520	3/8		133.00	87.00	●	●	●	○	●	●
9.530			133.00	87.00	●	○	●	●	●	●
9.580			133.00	87.00	○	○	●	○	●	●
9.600			133.00	87.00	●	○	●	●	●	●
9.650			133.00	87.00	○	○	●	○	●	●
9.700			133.00	87.00	●	○	●	○	●	●
9.750			133.00	87.00	●	○	●	○	●	●
9.800			133.00	87.00	●	●	●	○	●	●
9.850			133.00	87.00	●	○	●	○	●	●
9.900			133.00	87.00	●	○	●	○	●	●
9.920	25/64		133.00	87.00	●	○	●	○	●	○
10.000			133.00	87.00	●	●	●	○	●	●
10.050			133.00	87.00	●	○	●	○	●	●
10.080			133.00	87.00	●	○	●	○	●	●
10.100			133.00	87.00	●	○	●	○	●	●
10.200			133.00	87.00	●	○	●	○	●	●
10.250			133.00	87.00	●	○	●	○	●	●
10.260			133.00	87.00	○	○	●	○	●	●
10.300			133.00	87.00	●	○	●	○	●	●
10.320	13/32		133.00	87.00	●	○	●	○	●	●
10.400			133.00	87.00	●	○	●	○	●	●

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Straight shank twist drills

Guhring no.	305	308	605	608	622	657
Standard	DIN 338					
Tool material	HSCo					
Surface						
Type	N	N	Ti	Ti	GT 100	Ti
Cutting direction	right-hand	left-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	134	138	134	138	136	135
Techn. data page	117	117	117	117	118	118



d1				Availability								
mm		inch	mm									
10.490			133.00	87.00								
10.500			133.00	87.00								
10.600			133.00	87.00								
10.700			142.00	94.00								
10.720	27/64		142.00	94.00								
10.750			142.00	94.00								
10.800			142.00	94.00								
10.900			142.00	94.00								
11.000			142.00	94.00								
11.100			142.00	94.00								
11.110	7/16		142.00	94.00								
11.200			142.00	94.00								
11.250			142.00	94.00								
11.300			142.00	94.00								
11.400			142.00	94.00								
11.500			142.00	94.00								
11.510	29/64		142.00	94.00								
11.600			142.00	94.00								
11.700			142.00	94.00								
11.750			142.00	94.00								
11.800			142.00	94.00								
11.900			151.00	101.00								
11.910	15/32		151.00	101.00								
12.000			151.00	101.00								
12.050			151.00	101.00								
12.100			151.00	101.00								
12.200			151.00	101.00								
12.250			151.00	101.00								
12.300	31/64		151.00	101.00								
12.400			151.00	101.00								
12.500			151.00	101.00								
12.600			151.00	101.00								
12.700	1/2		151.00	101.00								
12.750			151.00	101.00								
12.800			151.00	101.00								
12.900			151.00	101.00								
13.000			151.00	101.00								
13.100	33/64		151.00	101.00								
13.200			151.00	101.00								

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

658	1221	1223	1260	2047	2458	2459	2997	1146
DIN 338								
HSCO								M42
S	C	A	○	●	F	F	S	○
GT 100	GT 100	GT 100	VA	P2000	Ti	GT 100	N	N
right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8
137	137	137	134	134	135	137	135	138
118	118	118	119	119	119	119	119	120




Availability								
●		○	●	●	●	●	●	●
●	○	○			●			
●		○	○				○	
●		○	●	●	●	●	●	●
●	○	○	●		●		○	
			●					
●		○	●	●	●	●	●	●
●			●					○
●		○	●					
●	○	○	●	●	●	●	●	●
●			●	●	●	●	●	●
					●			●
●			●	●	●		●	●
					●		○	
○								
●			●	●	●	●	●	●
					●			●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	710	732	2464
Standard	Guhring std.		
Tool material	Carbide	Solid carbide	
Surface	○	○	● F
Type	Duro 150	N	N
Cutting direction	right-hand	right-hand	right-hand
Tolerance	h8	h7	h7
Discount group	102	102	102
Techn. data page	120	120	120

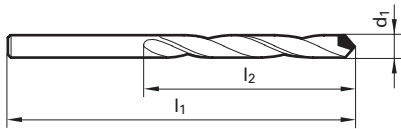


d1				Availability	
mm	inch	l1 mm	l2 mm		
1.000		34.00	12.00	●	●
1.020		34.00	12.00	●	●
1.040		34.00	12.00	●	●
1.070		36.00	14.00	●	●
1.090		36.00	14.00	●	●
1.100		36.00	14.00	●	●
1.180		36.00	14.00	●	●
1.190	3/64	38.00	16.00	●	●
1.200		38.00	16.00	●	●
1.300		38.00	16.00	●	●
1.320		38.00	16.00	●	●
1.400		40.00	18.00	●	●
1.500		40.00	18.00	●	●
1.510		43.00	20.00	●	●
1.590	1/16	43.00	20.00	●	●
1.600		43.00	20.00	●	●
1.610		43.00	20.00	●	●
1.700		43.00	20.00	●	●
1.780		46.00	22.00	●	●
1.800		46.00	22.00	●	●
1.850		46.00	22.00	●	●
1.900		46.00	22.00	●	●
1.930		49.00	24.00	●	●
1.980	5/64	49.00	24.00	●	●
1.990		49.00	24.00	●	●
2.000		49.00	24.00	●	●
2.060		49.00	24.00	●	●
2.080		49.00	24.00	●	●
2.100		49.00	24.00	●	●
2.180		53.00	27.00	●	●
2.200		53.00	27.00	●	●
2.260		53.00	27.00	●	●
2.300		53.00	27.00	●	●
2.370		57.00	30.00	●	●
2.380	3/32	57.00	30.00	●	●
2.400		57.00	30.00	●	●
2.440		57.00	30.00	●	●
2.490		57.00	30.00	●	●
2.500		57.00	30.00	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	710	732	2464
Standard	Guhring std.		
Tool material	Carbide	Solid carbide	
Surface	○	○	● F
Type	Duro 150	N	N
Cutting direction	right-hand	right-hand	right-hand
Tolerance	h8	h7	h7
Discount group	102	102	102
Techn. data page	120	120	120




d1				l1	l2	Availability		
mm	inch	mm	mm	mm				
4.220		75.00	43.00					
4.300		80.00	47.00					
4.370	11/64	80.00	47.00					
4.390		80.00	47.00					
4.400		80.00	47.00					
4.500		80.00	47.00		●			
4.570		80.00	47.00					
4.600		80.00	47.00					
4.620		80.00	47.00					
4.700		80.00	47.00		○			
4.760	3/16	86.00	52.00					
4.800		86.00	52.00					
4.850		86.00	52.00					
4.900		86.00	52.00					
4.920		86.00	52.00					
4.980		86.00	52.00					
5.000		86.00	52.00		●			
5.060		86.00	52.00					
5.100		86.00	52.00		●			
5.110		86.00	52.00					
5.160	13/64	86.00	52.00					
5.180		86.00	52.00					
5.200		86.00	52.00					
5.220		86.00	52.00					
5.300		86.00	52.00		●			
5.310		93.00	57.00					
5.400		93.00	57.00					
5.410		93.00	57.00					
5.500		93.00	57.00		●			
5.560	7/32	93.00	57.00					
5.600		93.00	57.00					
5.610		93.00	57.00					
5.700		93.00	57.00					
5.790		93.00	57.00					
5.800		93.00	57.00					
5.900		93.00	57.00					
5.940		93.00	57.00					
5.950	15/64	93.00	57.00					
6.000		93.00	57.00		●			

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	710	732	2464
Standard	Guhring std.		
Tool material	Carbide	Solid carbide	
Surface	○	○	● (F)
Type	Duro 150	N	N
Cutting direction	right-hand	right-hand	right-hand
Tolerance	h8	h7	h7
Discount group	102	102	102
Techn. data page	120	120	120

Straight shank twist drills




d1				Availability		
mm	inch	l1 mm	l2 mm	710	732	2464
6.040		101.00	63.00	●	●	●
6.100		101.00	63.00	●	●	●
6.150		101.00	63.00	●	●	●
6.200		101.00	63.00	●	●	●
6.250		101.00	63.00	●	●	●
6.300		101.00	63.00	●	●	●
6.350	1/4	101.00	63.00	●	●	○
6.400		101.00	63.00	●	●	●
6.500		101.00	63.00	●	●	●
6.530		101.00	63.00	●	●	●
6.600		101.00	63.00	●	●	●
6.630		101.00	63.00	●	●	●
6.700		101.00	63.00	●	●	●
6.750	17/64	109.00	69.00	●	●	●
6.800		109.00	69.00	●	●	●
6.900		109.00	69.00	●	●	●
7.000		109.00	69.00	●	●	●
7.030		109.00	69.00	●	●	●
7.100		109.00	69.00	○	●	●
7.140	9/32	109.00	69.00	●	●	●
7.200		109.00	69.00	●	●	●
7.300		109.00	69.00	●	●	●
7.370		109.00	69.00	●	●	●
7.400		109.00	69.00	○	●	●
7.490		109.00	69.00	●	●	●
7.500		109.00	69.00	●	●	●
7.540	19/64	117.00	75.00	●	●	●
7.600		117.00	75.00	●	●	●
7.670		117.00	75.00	●	●	●
7.700		117.00	75.00	●	●	●
7.800		117.00	75.00	●	●	●
7.900		117.00	75.00	●	●	●
7.940	5/16	117.00	75.00	●	●	●
8.000		117.00	75.00	●	●	●
8.030		117.00	75.00	●	●	●
8.100		117.00	75.00	●	●	●
8.200		117.00	75.00	●	●	●
8.300		117.00	75.00	●	●	●
8.330	21/64	117.00	75.00	●	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	710	732	2464
Standard	Guhring std.		
Tool material	Carbide	Solid carbide	
Surface	○	○	● F
Type	Duro 150	N	N
Cutting direction	right-hand	right-hand	right-hand
Tolerance	h8	h7	h7
Discount group	102	102	102
Techn. data page	120	120	120



d1		l1	l2
mm	inch	mm	mm
8.400		117.00	75.00
8.430		117.00	75.00
8.500		117.00	75.00
8.600		125.00	81.00
8.610		125.00	81.00
8.700		125.00	81.00
8.730	11/32	125.00	81.00
8.800		125.00	81.00
8.840		125.00	81.00
8.900		125.00	81.00
9.000		125.00	81.00
9.090		125.00	81.00
9.100		125.00	81.00
9.130	23/64	125.00	81.00
9.200		125.00	81.00
9.300		125.00	81.00
9.340		125.00	81.00
9.400		125.00	81.00
9.500		125.00	81.00
9.520	3/8	133.00	87.00
9.580		133.00	87.00
9.600		133.00	87.00
9.700		133.00	87.00
9.800		133.00	87.00
9.900		133.00	87.00
9.920	25/64	133.00	87.00
10.000		133.00	87.00
10.080		133.00	87.00
10.200		133.00	87.00
10.260		133.00	87.00
10.300		133.00	87.00
10.320	13/32	133.00	87.00
10.490		133.00	87.00
10.500		133.00	87.00
10.720	27/64	142.00	94.00
11.000		142.00	94.00
11.110	7/16	142.00	94.00
11.500		142.00	94.00
11.510	29/64	142.00	94.00


Availability		
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	○
●	●	●
●	●	●
●	●	●
●	●	●
●	●	○
●	●	○
●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability	
mm	inch	l1	l2		
0.320		19.00	2.00		○
0.350		19.00	2.00	○	
0.400	1/64	19.00	2.50	●	
0.450		19.00	2.50		
0.480		19.00	2.50	○	
0.500		20.00	3.00	●	○
0.510		20.00	3.00		
0.520		20.00	3.00		
0.550		21.00	3.50	●	○
0.570		21.00	3.50		
0.575		21.00	3.50	○	
0.580		21.00	3.50		○
0.590		21.00	3.50		
0.600		21.00	3.50	●	●
0.610		22.00	4.00		
0.620		22.00	4.00		○
0.640		22.00	4.00		
0.650		22.00	4.00	●	○
0.660		22.00	4.00	○	
0.690		23.00	4.50		○
0.700		23.00	4.50	●	●
0.710		23.00	4.50		
0.720		23.00	4.50	●	
0.730		23.00	4.50		
0.740		23.00	4.50		○
0.750		23.00	4.50	●	○ ●
0.780		24.00	5.00		
0.790	1/32	24.00	5.00	●	
0.800		24.00	5.00	●	●
0.810		24.00	5.00		○
0.820		24.00	5.00	●	
0.825		24.00	5.00	○	
0.840		24.00	5.00		
0.850		24.00	5.00	●	○
0.860		25.00	5.50		
0.870		25.00	5.50		
0.875		25.00	5.50		○
0.890		25.00	5.50	●	○
0.900		25.00	5.50	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSCO							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124

Straight shank twist drills



Availability


			●		○					
●			●		○	●				
			●		○					
			●		○					
			●		○					
●			●		○	●				
			●	●						
			●		○	●				
			●		○					
			●		○					
●			●		○	○				
○			●		○	●				
●			●		○	●				
			○							
○			●			●				
			●							
●	○		●	●		●				

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553
Standard	DIN 1897							
Tool material	HSS							
Surface								
Type	N	H	W	N	H	W	GT 80	GT 80
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	138	134	138	138	136	138
Techn. data page	120	121	121	121	121	121	122	122



d1				Availability									
mm		inch	mm										
0.910			25.00	5.50									
0.930			25.00	5.50									
0.940			25.00	5.50									
0.950			25.00	5.50	●	○		●					
0.960			26.00	6.00									
0.970			26.00	6.00									
0.975			26.00	6.00									
0.980			26.00	6.00									
0.990			26.00	6.00									
1.000			26.00	6.00	●	●	●	●	○	●	●		
1.020			26.00	6.00	●			○				●	●
1.030			26.00	6.00	○								
1.040			26.00	6.00	○								
1.050			26.00	6.00	●								
1.060			26.00	6.00									
1.070			28.00	7.00	●								
1.090			28.00	7.00	●								
1.100			28.00	7.00	●	●	●	●	○	●	○		
1.110			28.00	7.00	○								
1.120			28.00	7.00	●								
1.150			28.00	7.00	●								
1.170			28.00	7.00									
1.180			28.00	7.00	●								
1.190	3/64		30.00	8.00	●	○	○	○	○	○	●	○	
1.200			30.00	8.00	●	●	●	●	●	○	●	●	
1.210			30.00	8.00									
1.220			30.00	8.00									
1.230			30.00	8.00									
1.250			30.00	8.00	●	●						●	○
1.260			30.00	8.00	○								
1.280			30.00	8.00									
1.300			30.00	8.00	●	●	●	●	○	●	●		
1.320			30.00	8.00									
1.330			32.00	9.00									
1.350			32.00	9.00	●								
1.370			32.00	9.00									
1.400			32.00	9.00	●	●	●	●	○	●	●		
1.420			32.00	9.00									
1.430			32.00	9.00	●								

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAlN
● a TiAlN nanoA
● A TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSC0							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124

Straight shank twist drills




Availability										
			●							
			●							
	○		●		●					
			○							
			●							
●	○	●	●	○	●	●	●	○	●	●
●			●	○	○					
●			●	○	○					
●	○	○	●	●	○	○		○	●	●
○			●	○	●					
●			●	○	○					
●			●	○	○					
●		●	●	○	○	○	○		○	●
○		○	●	○	●	●	●	●	●	●
●			○	○	○					
●	●		●	○	●	●	●	○	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability											
mm		inch	l1	l2											
mm	inch	mm	mm												
1.450			32.00	9.00	●				○			○		●	●
1.470			32.00	9.00											
1.480			32.00	9.00	●										
1.500			32.00	9.00	●									●	●
1.510			34.00	10.00	●				○					●	○
1.520			34.00	10.00	●										
1.530			34.00	10.00										●	
1.540			34.00	10.00											
1.550			34.00	10.00	●		●							●	●
1.570			34.00	10.00	○										
1.580			34.00	10.00											
1.590	1/16		34.00	10.00	●		○							●	○
1.600			34.00	10.00	●		●							●	●
1.610			34.00	10.00	●									●	○
1.620			34.00	10.00	●		●								
1.630			34.00	10.00											
1.650			34.00	10.00	●									●	●
1.670			34.00	10.00											
1.680			34.00	10.00											
1.700			34.00	10.00	●		●							●	●
1.720			36.00	11.00	●										
1.730			36.00	11.00	○										
1.740			36.00	11.00	○										
1.750			36.00	11.00	●									●	●
1.770			36.00	11.00	○										
1.780			36.00	11.00	●		●							●	○
1.800			36.00	11.00	●		●							●	●
1.810			36.00	11.00											
1.820			36.00	11.00										●	
1.830			36.00	11.00											
1.850			36.00	11.00	●		●							●	●
1.900			36.00	11.00	●		●							●	●
1.930			38.00	12.00	●									○	○
1.940			38.00	12.00											
1.950			38.00	12.00	●		●							●	●
1.970			38.00	12.00	●										
1.980	5/64		38.00	12.00	●		○							●	○
1.990			38.00	12.00	●									●	○
2.000			38.00	12.00	●		●							●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSCo							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124



Availability										
●			●	●	●					
●	○	○	●	●	●	●	●	●	●	●
●			●	●	●					
●			●	○	●					
●	○		●	○	●	○	○			●
●			●	●	●					
●			●	○	●	●	●	○	●	●
●			●							
●			●							
●	●	●	●	○	●	●		○	●	●
●			●	○	●					
●			●	○	●					
●			●	○	●					
●	●	○	●	○	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Stub drills

Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		




d1				Availability															
mm		inch	mm																
2.010			38.00	12.00															
2.020			38.00	12.00	●	●			○										
2.030			38.00	12.00															
2.050			38.00	12.00	●	●			●				●	●					
2.060			38.00	12.00	●				○				●	○					
2.080			38.00	12.00	●				○				●	○					
2.100			38.00	12.00	●	●	●		●	○	○		●	●					●
2.120			38.00	12.00	●								●						
2.130			40.00	13.00									●						
2.150			40.00	13.00	●					○			●	●					
2.180			40.00	13.00	●				○				●	○					○
2.200			40.00	13.00	●	●	●		●	○	○		●	●					●
2.220			40.00	13.00	●				●				●						
2.250			40.00	13.00	●	●		○					●	●					●
2.260			40.00	13.00	●				●				●	●					●
2.270			40.00	13.00									●						○
2.300			40.00	13.00	●	●	●		●		○		●	●					●
2.320			40.00	13.00	●								●	●					●
2.350			40.00	13.00	●	●			●		○		●	●					●
2.360			40.00	13.00					○				●						●
2.370			43.00	14.00	●	○			○	○			●						○
2.380	3/32		43.00	14.00	●	●	●		○	○	○		●	●					○
2.400			43.00	14.00	●	●	●		●	●	○		●	●					●
2.420			43.00	14.00	○				○		○		●	○					○
2.440			43.00	14.00	●				○				●	●					●
2.450			43.00	14.00	●	○			●				●	●					●
2.470			43.00	14.00					○				●						○
2.480			43.00	14.00	●								●						●
2.490			43.00	14.00	●				●				●	●					●
2.500			43.00	14.00	●	●	●		●	●	●		●	●					●
2.520			43.00	14.00	●				○				●	●					●
2.530			43.00	14.00	●				●	○			●	●					●
2.550			43.00	14.00	●	●	●		●				●	●					●
2.570			43.00	14.00							○		●						●
2.580			43.00	14.00	●				○	○			●	●					●
2.600			43.00	14.00	●	●	●		●	○	○		●	●					●
2.640			43.00	14.00	●				○				●	●					○
2.650			43.00	14.00	●	○			●				●	●					●
2.700			46.00	16.00	●	●	●		●	○	○		●	●					●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability									
mm		inch	l1	mm									
2.710			46.00	16.00	●			○				●	●
2.720			46.00	16.00				○				●	●
2.750			46.00	16.00	●			○				●	●
2.770			46.00	16.00									
2.780	7/64		46.00	16.00	●	○	○	●	○	○	●	●	●
2.790			46.00	16.00	●			○			●	●	●
2.800			46.00	16.00	●	●	●	●	○	○	●	●	●
2.820			46.00	16.00	●			○			●	●	○
2.830			46.00	16.00									
2.850			46.00	16.00	●			○			●	●	●
2.870			46.00	16.00	○			●			●	●	●
2.880			46.00	16.00				○					
2.900			46.00	16.00	●	●	●	●	●	○	●	●	●
2.920			46.00	16.00	○					○	●	●	●
2.950			46.00	16.00	●	●					●	●	○
2.970			46.00	16.00	●								
3.000			46.00	16.00	●	●	●	●	●		●	●	●
3.020			49.00	18.00	●			○					
3.030			49.00	18.00									
3.050			49.00	18.00	●		●	●			●	●	●
3.100			49.00	18.00	●	●	●	●	●	○	●	●	●
3.150			49.00	18.00	●			●	○		●	●	●
3.170	1/8		49.00	18.00	●	○	●	○	○	○	●	●	●
3.200			49.00	18.00	●	●	●	●	○	●	●	●	●
3.230			49.00	18.00				●					
3.250			49.00	18.00	●	●		●			●	●	●
3.260			49.00	18.00	●						●	●	○
3.300			49.00	18.00	●	●	●	●	●		●	●	●
3.330			49.00	18.00				●					
3.350			49.00	18.00	●	●			○		●	●	●
3.400			52.00	20.00	●	●	●	●	●		●	●	●
3.420			52.00	20.00				○					
3.450			52.00	20.00	●			●			●	●	●
3.480			52.00	20.00				○					
3.500			52.00	20.00	●	●	●	●	●		●	●	●
3.520			52.00	20.00									
3.530			52.00	20.00				○					
3.550			52.00	20.00	●			○			●	●	●
3.570	9/64		52.00	20.00	●	●	○		○	○	●	●	○

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAlN
● a TiAlN nanoA
● A TiAlN SuperA



Straight shank twist drills

653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSC0							
(S)	(S)	(F)			(S)	(S)	(O)	(M)	(F)	(F)
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124



Availability										
●			●		●					
●			●	○						
●			●	○	●					
●	●	○	●	○	●	●	●	○	●	●
○			●	○	●					
●	○	●	●	●	●	●	●	○	●	●
●	●	●	●	●	●	●	●	●	●	●
●			●	○	●	●	●	○	●	●
●	○		●	○	●	○				●
●	●	●	●	○	●	●	●	○	●	●
●			●	○	●					
●	●	○	●	●	●	●	●	○	●	●
●			●	○	●					
●	●		●	●	●	●	●	○	●	●
●			●		●					
●			●		●	○				


(C) TiCN
(Cb) Carbo
(D) Cristall
(F) FIRE/nanoFIRE
(P) AlCrN
(S) TiN
(S+) TiN+
(M) MolyGlide
(Y) Signum



Stub drills

Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability							
mm		inch	l1	mm							
				223	224	225	226	227	228	552	553
3.580			52.00	○							
3.600			52.00	●	●		●	○	●	●	●
3.650			52.00	●	○				●	●	●
3.660			52.00	●						●	●
3.680			52.00	●						●	●
3.700			52.00	●	●	●		○	○	●	●
3.710			52.00				○				
3.720			52.00				○				
3.730			52.00	○			●			●	○
3.750			52.00	●			●			●	●
3.770			55.00	●			○				
3.800			55.00	●	●	●	●		●	●	●
3.830			55.00								
3.840			55.00				○				
3.850			55.00	●	●		●			●	●
3.860			55.00	●			○			●	○
3.900			55.00	●	○	○			○	●	●
3.910			55.00	●			○			●	○
3.950			55.00	●			○			●	○
3.960			55.00	●							
3.970	5/32		55.00	●	○	○	○	○	○	●	○
3.990			55.00	●			○			●	○
4.000			55.00	●	●	●	●	●	●	●	●
4.020			55.00	●			○				
4.030			55.00				○				
4.033			55.00				○				
4.040			55.00	●			○			●	○
4.050			55.00	●	●					●	○
4.080			55.00	●							
4.090			55.00	●						●	●
4.100			55.00	●	●	●	●	●	○	●	●
4.150			55.00	●			●			●	●
4.200			55.00	●	●	●	●	●	●	●	●
4.220			55.00	●			○			●	●
4.230			55.00				○				
4.250			55.00	●	●		○	○		●	●
4.290			58.00				○				
4.300			58.00	●	●	●	●	●	●	●	●
4.350			58.00				○			●	

○ bright ● steam tempered ◐ nitrided lands ● nitrided ● golden brown **A** TiAlN **a** TiAlN nanoA **A** TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSC0							
S	S	F	$\text{GV } 120_{+0.02, -0.036}$	$\text{GV } 120_{+0.02, -0.060}$	S	S	○	M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124

Straight shank twist drills




Availability										
●		○	●	●	●	●	●	○	●	●
●			●		●					
●		●	●	●	●	●	●	○	●	●
●			●		●					
●			●		●					
●	●	●	●	●	●	●	○	○	●	●
●			○							
●			●		●					
●			●		○		○			
●	●	●	●	●	●	●	●	●	●	●
●			○							
●			●		○					
●	●	●	●	●	●	●	●	○	●	●
●			●							
●	●	●	●	●	●	●	●	○	●	●

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability							
mm	inch	l1	l2	223	224	225	226	227	228	552	553
4.370	11/64	58.00	24.00	●	○	●	●	○	○	●	●
4.380		58.00	24.00	○							
4.390		58.00	24.00	○					○	○	○
4.400		58.00	24.00	●	●	●	●		○	●	●
4.450		58.00	24.00	●	●		○			●	●
4.500		58.00	24.00	●	●	●	●	●		●	●
4.520		58.00	24.00				○				
4.550		58.00	24.00	●						●	●
4.560		58.00	24.00				○				
4.570		58.00	24.00	●			○			●	○
4.600		58.00	24.00	●	●	●	●	●	○	●	●
4.620		58.00	24.00	●			○			●	○
4.650		58.00	24.00	●						●	●
4.700		58.00	24.00	●	●		○	●		●	●
4.750		58.00	24.00	●			○			●	○
4.760	3/16	62.00	26.00	●	●	●	●	○	○	●	○
4.800		62.00	26.00	●	○	●	●	○	●	●	○
4.850		62.00	26.00	●			●			●	○
4.900		62.00	26.00	●	○	●		●	○	●	●
4.920		62.00	26.00	●			○			●	○
4.930		62.00	26.00				○				
4.950		62.00	26.00	●			●			●	○
4.970		62.00	26.00				○				
4.980		62.00	26.00	●			○			●	○
5.000		62.00	26.00	●	●	●	●	●		●	●
5.020		62.00	26.00	●							
5.050		62.00	26.00	●			●			●	
5.060		62.00	26.00	●						●	○
5.100		62.00	26.00	●	●	●	●	●	●	●	●
5.110		62.00	26.00	●			●			●	●
5.150		62.00	26.00	●			●	○			
5.160	13/64	62.00	26.00	●			○	○	○	●	○
5.180		62.00	26.00	●			○			●	○
5.200		62.00	26.00	●	●	●	●		○	●	●
5.220		62.00	26.00	●			○			●	○
5.250		62.00	26.00	●		●	○			●	
5.300		62.00	26.00	●	●	●	○	●		●	●
5.310		66.00	28.00	●			○			●	
5.350		66.00	28.00	●							


○ bright
 ● steam tempered
 ◐ nitrided lands
 ● nitrided
 ● golden brown
 A TiAlN
 a TiAlN nanoA
 A TiAlN SuperA



Stub drills

Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability							
mm		inch	l1	mm							
				223	224	225	226	227	228	552	553
5.400			66.00	●	●	○	○	○	○	●	●
5.410			66.00	●	●	○	○	○	○	●	●
5.450			66.00	●	●	○	○	○	○	●	●
5.500			66.00	●	●	●	●	●	●	●	●
5.520			66.00	●	●	○	○	○	○	●	●
5.550			66.00	●	●	○	○	○	○	●	●
5.560	7/32		66.00	○	●	●	○	○	○	●	●
5.600			66.00	●	●	○	○	○	○	●	●
5.610			66.00	○	●	○	○	○	○	●	●
5.620			66.00	●	●	○	○	○	○	●	●
5.700			66.00	●	●	●	●	○	○	●	●
5.750			66.00	●	●	○	○	○	○	●	●
5.790			66.00	○	●	○	○	○	○	●	●
5.800			66.00	●	●	○	○	○	○	●	●
5.850			66.00	●	●	○	○	○	○	●	●
5.900			66.00	●	○	●	●	○	○	●	●
5.940			66.00	●	○	○	○	○	○	●	○
5.950	15/64		66.00	●	○	●	○	○	○	●	○
6.000			66.00	●	●	●	●	○	○	●	●
6.040			70.00	○	●	○	○	○	○	●	●
6.050			70.00	●	●	○	○	○	○	●	●
6.100			70.00	●	●	●	●	●	○	●	●
6.150			70.00	●	●	○	○	○	○	●	○
6.170			70.00	●	●	○	○	○	○	●	○
6.200			70.00	●	●	●	●	○	○	●	●
6.250			70.00	●	●	○	○	○	○	●	●
6.300			70.00	●	●	●	●	○	○	●	●
6.320			70.00	●	●	○	○	○	○	●	○
6.350	1/4		70.00	●	●	●	●	○	○	●	○
6.400			70.00	●	●	●	●	○	○	●	○
6.450			70.00	●	●	○	○	○	○	●	○
6.500			70.00	●	●	●	●	●	○	●	●
6.530			70.00	●	●	●	●	○	○	●	●
6.540			70.00	●	●	○	○	○	○	●	○
6.550			70.00	●	●	○	○	○	○	●	○
6.570			70.00	●	●	○	○	○	○	●	○
6.600			70.00	●	●	●	●	●	○	●	●
6.630			70.00	●	●	○	○	○	○	●	●
6.700			70.00	●	●	○	○	○	○	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSC0							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124

Straight shank twist drills




Availability										
●	○	●	●	○	●	●	●	○	●	
●			●	○					●	●
●		●	●	●	●	●	●	○	●	●
●	●	○	●	○	●	●		○	●	
●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	○	●	●	●		●	
●	●	●	●	○	●	●	○	●	●	●
●	●	●	●	○	●	●	●	●	●	●
●	●	○	●	●	●	●	●	○	●	●
●	●	○	●	●	●	●	○	○	●	
●			●	○	●	●	●	○	○	
●	●	●	●	●	●	●	●	○	●	●
●			●	○	●	●	●	○	○	
●	○	●	●	○	●	●	●	○	●	●

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability								
mm		inch	mm									
6.750	17/64		74.00	34.00	●			○	○	○	●	○
6.760			74.00	34.00	○						●	○
6.800			74.00	34.00	●	●	●	●		○	●	●
6.850			74.00	34.00	●						●	●
6.900			74.00	34.00	●	○	●	●		○	●	●
6.920			74.00	34.00	●						○	●
6.950			74.00	34.00	●						○	●
7.000			74.00	34.00	●	●	●	●	●	○	●	●
7.030			74.00	34.00	○						●	○
7.050			74.00	34.00	●						○	●
7.100			74.00	34.00	●						○	●
7.140	9/32		74.00	34.00	●	●	●	●	○	○	●	○
7.150			74.00	34.00	●						○	●
7.200			74.00	34.00	●						○	●
7.250			74.00	34.00	●						○	●
7.300			74.00	34.00	●		●	●	○		●	●
7.350			74.00	34.00	●						○	●
7.370			74.00	34.00	●						○	●
7.400			74.00	34.00	●						○	●
7.450			74.00	34.00	●					○	●	●
7.490			74.00	34.00	●						○	●
7.500			74.00	34.00	●	●	●	●	○	○	●	○
7.540	19/64		79.00	37.00	○	○	○	○	○	○	●	○
7.550			79.00	37.00	○						○	●
7.600			79.00	37.00	●		●				○	○
7.670			79.00	37.00	●						○	○
7.700			79.00	37.00	●			●			○	○
7.750			79.00	37.00	●	●		●	○			
7.800			79.00	37.00	●		○	○		○	●	
7.850			79.00	37.00	●						○	●
7.900			79.00	37.00	●			○	○		●	
7.940	5/16		79.00	37.00	●	●	●	●	○	○	●	○
8.000			79.00	37.00	●	●	●	●			○	●
8.030			79.00	37.00	●	●		○			○	●
8.050			79.00	37.00	●						○	●
8.100			79.00	37.00	●	●		●			○	●
8.150			79.00	37.00	●						○	●
8.200			79.00	37.00	●		●	●			○	●
8.250			79.00	37.00	●						○	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSC0							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124

Straight shank twist drills




Availability										
●			●	●	●	●				
●	●	●	●	●	●	●	●	●	●	●
●	○		●	○	●	●		○	●	●
●			●	●	●	●	●	○	●	●
●		●	●	○	●	○	○	○		
●			●	○	●	○	●	○	○	
●		○	●	○	●	●	○	○	○	
●	●	●	●	○	●	○	●	○	●	○
●			●	○	●			○	●	●
●		●	●	○	●		○	○		○
●		○	●	○	●	●	○	●	●	●
○	●		●	○	●	○	●	○		
●	●		●	○	●	●	●	●	●	●
●			●	●						
●		○	●		●	●		○	●	
●		○	●		●	●		○	●	

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		




d1				Availability								
mm	inch	l1	l2									
8.300		79.00	37.00	●				○			●	●
8.330	21/64	79.00	37.00	●	●	○		○		○	●	○
8.400		79.00	37.00	●	●	●				○	●	
8.430		79.00	37.00	●			○				●	●
8.450		79.00	37.00	●							●	
8.500		79.00	37.00	●	●	●		●			●	●
8.520		84.00	40.00	●								
8.550		84.00	40.00	●								
8.600		84.00	40.00	●		●		●			●	●
8.610		84.00	40.00	●							●	●
8.650		84.00	40.00	●							●	
8.700		84.00	40.00	●		●		●			●	
8.730	11/32	84.00	40.00	●		●		○		○	●	○
8.750		84.00	40.00	●							●	
8.800		84.00	40.00	●				○		○	●	○
8.840		84.00	40.00	●				○			●	○
8.850		84.00	40.00	●				○			●	
8.900		84.00	40.00	●		○		○			●	
8.950		84.00	40.00	●								
9.000		84.00	40.00	●	●	●				○	●	○
9.050		84.00	40.00	●							●	
9.090		84.00	40.00	○				○			●	○
9.100		84.00	40.00	●				●			●	
9.130	23/64	84.00	40.00	●		○		○		○	●	○
9.150		84.00	40.00	●				○			●	
9.160		84.00	40.00	○								
9.200		84.00	40.00	●	●	○					●	
9.250		84.00	40.00	●								
9.270		84.00	40.00	○								
9.300		84.00	40.00	●							●	
9.340		84.00	40.00	●				●			●	○
9.350		84.00	40.00	●				○			●	
9.400		84.00	40.00	●		○					●	○
9.500		84.00	40.00	●	●					○	○	○
9.520	3/8	89.00	43.00	●	○	●		●		○	○	○
9.580		89.00	43.00	●				○		○	●	○
9.600		89.00	43.00	●				●			●	○
9.650		89.00	43.00	●							●	
9.700		89.00	43.00	●				○			●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553
Standard	DIN 1897							
Tool material	HSS							
Surface								
Type	N	H	W	N	H	W	GT 80	GT 80
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	138	134	138	138	136	138
Techn. data page	120	121	121	121	121	121	122	122




d1				Availability														
mm		inch	mm															
9.750			89.00	43.00	●													
9.800			89.00	43.00	●			○										
9.850			89.00	43.00	●													
9.900			89.00	43.00	●													
9.920	25/64		89.00	43.00	●	○												
10.000			89.00	43.00	●		●											
10.040			89.00	43.00	●													
10.050			89.00	43.00	●													
10.080			89.00	43.00	●													
10.100			89.00	43.00	●													
10.150			89.00	43.00	●													
10.200			89.00	43.00	●													
10.250			89.00	43.00	●													
10.260			89.00	43.00	●													
10.300			89.00	43.00	●													
10.320	13/32		89.00	43.00	●													
10.400			89.00	43.00	●													
10.490			89.00	43.00	●													
10.500			89.00	43.00	●													
10.600			89.00	43.00	●													
10.700			95.00	47.00	●													
10.720	27/64		95.00	47.00	●													
10.750			95.00	47.00	●													
10.800			95.00	47.00	●													
10.900			95.00	47.00	●													
11.000			95.00	47.00	●													
11.100			95.00	47.00	●													
11.110	7/16		95.00	47.00	●													
11.200			95.00	47.00	●													
11.250			95.00	47.00	●													
11.300			95.00	47.00	●													
11.400			95.00	47.00	●													
11.500			95.00	47.00	●													
11.510	29/64		95.00	47.00	●													
11.600			95.00	47.00	●													
11.700			95.00	47.00	●													
11.750			95.00	47.00	●													
11.800			95.00	47.00	●													
11.900			102.00	51.00	●													

○ bright
 ● steam tempered
 ◐ nitrided lands
 ● nitrided
 ● golden brown
 A TiAlN
 a TiAlN nanoA
 A TiAlN SuperA



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553
Standard	DIN 1897							
Tool material	HSS							
Surface								
Type	N	H	W	N	H	W	GT 80	GT 80
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	138	134	138	138	136	138
Techn. data page	120	121	121	121	121	121	122	122




d1				Availability							
mm	inch	l1	l2	223	224	225	226	227	228	552	553
11.910	15/32	102.00	51.00	○	●			○	○	●	○
12.000		102.00	51.00	●	●	●	●			●	○
12.050		102.00	51.00	●							
12.100		102.00	51.00	●							
12.150		102.00	51.00	●		○					
12.200		102.00	51.00	●			●				
12.250		102.00	51.00	●							
12.300	31/64	102.00	51.00	●				○	○	●	○
12.350		102.00	51.00	●							
12.400		102.00	51.00	●						●	
12.450		102.00	51.00	●							
12.500		102.00	51.00	●	●	●	●		○	●	○
12.600		102.00	51.00	●							
12.700	1/2	102.00	51.00	●		●	●		○	●	○
12.750		102.00	51.00	●							
12.800		102.00	51.00	●		●			○	●	○
12.900		102.00	51.00	●							
13.000		102.00	51.00	●	●	●	●		○	●	○
13.100	33/64	102.00	51.00	●						●	○
13.200		102.00	51.00	●							
13.250		107.00	54.00	●			○				
13.300		107.00	54.00	●							
13.400		107.00	54.00	●							
13.490	17/32	107.00	54.00	●						●	○
13.500		107.00	54.00	●				○	○	●	○
13.600		107.00	54.00	●							
13.620		107.00	54.00	●	○						
13.700		107.00	54.00	●							
13.750		107.00	54.00	●				○			○
13.800		107.00	54.00	●							
13.890	35/64	107.00	54.00	●						●	○
14.000		107.00	54.00	●	●	●	●		●	●	●
14.050		111.00	56.00	●							
14.100		111.00	56.00	●							
14.200		111.00	56.00	●			●				
14.250		111.00	56.00	●			○				○
14.290	9/16	111.00	56.00	●			●			●	○
14.300		111.00	56.00	●							
14.400		111.00	56.00	●							

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability							
mm	inch	l1	l2	223	224	225	226	227	228	552	553
14.500		111.00	56.00	●	●	●	●		○	●	○
14.600		111.00	56.00	●							
14.680	37/64	111.00	56.00	●						○	○
14.700		111.00	56.00	○					○		
14.750		111.00	56.00	●							
14.800		111.00	56.00	●							
14.900		111.00	56.00	●							
15.000		111.00	56.00	●	●	●	●	●	○	●	○
15.080	19/32	115.00	58.00	●						○	○
15.100		115.00	58.00	●							
15.200		115.00	58.00	●			●				
15.250		115.00	58.00	●							
15.300		115.00	58.00	●							
15.400		115.00	58.00	●							
15.480	39/64	115.00	58.00	●				○		●	○
15.500		115.00	58.00	●					○	●	○
15.600		115.00	58.00	●				○			
15.700		115.00	58.00	●				○			
15.750		115.00	58.00	●				○			
15.800		115.00	58.00	●							
15.870	5/8	115.00	58.00	●			●			●	○
16.000		115.00	58.00	●	●	●	●			●	○
16.100		119.00	60.00	●							
16.150		119.00	60.00	●							
16.200		119.00	60.00	●				○			
16.250		119.00	60.00	●							
16.270	41/64	119.00	60.00	●						●	○
16.300		119.00	60.00	●							
16.500		119.00	60.00	●					○	●	
16.670	21/32	119.00	60.00	●			●				
16.750		119.00	60.00	●							
17.000		119.00	60.00	●	●		●			●	○
17.070	43/64	123.00	62.00	●				○		●	○
17.100		123.00	62.00	●							
17.200		123.00	62.00	●							
17.250		123.00	62.00	●							
17.460	11/16	123.00	62.00	●						●	○
17.500		123.00	62.00	●			○				
17.600		123.00	62.00	●							

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSCO							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124




Availability										
●		●	●		●	●				●
			●		●					
●			●		●					
●		●	●		●	●				●
●			●		○					
			●							
●			●		○	●	●			
●			●							
●			●		○		●			●
●			●							
●			●				●			
●			●				●			
●			●				●			
●			●				●			

C TiCN
Cb Carbo
D Cristall
F FIRE/nanoFIRE
P AlCrN
S TiN
S+ TiN+
M MolyGlide
Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553
Standard	DIN 1897							
Tool material	HSS							
Surface								
Type	N	H	W	N	H	W	GT 80	GT 80
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	138	134	138	138	136	138
Techn. data page	120	121	121	121	121	121	122	122



d1				Availability							
mm	inch	l1 mm	l2 mm	223	224	225	226	227	228	552	553
17.750		123.00	62.00	●			○				
17.860	45/64	123.00	62.00	●						●	○
18.000		123.00	62.00	●	●	●	●		○	●	●
18.100		127.00	64.00	●							
18.200		127.00	64.00	●							
18.250		127.00	64.00	●							
18.260	23/32	127.00	64.00	●						●	○
18.500		127.00	64.00	●			○				○
18.650	47/64	127.00	64.00	●							○
18.750		127.00	64.00	●							
19.000		127.00	64.00	●	●					●	○
19.050	3/4	131.00	66.00	●			○	○		○	○
19.100		131.00	66.00	●							
19.250		131.00	66.00	●							
19.450	49/64	131.00	66.00	●							○
19.500		131.00	66.00	●							○
19.750		131.00	66.00	●			○				
19.840	25/32	131.00	66.00	○						●	○
20.000		131.00	66.00	●	●		○	●	●	○	
20.100		136.00	68.00	●							
20.240	51/64	136.00	68.00	●							
20.250		136.00	68.00	●							
20.500		136.00	68.00	●							
20.640	13/16	136.00	68.00	●			○				
20.750		136.00	68.00	●							
20.800		136.00	68.00	●							
21.000		136.00	68.00	●	●		●		○		
21.030	53/64	136.00	68.00	○							
21.250		141.00	70.00				○				
21.430	27/32	141.00	70.00	●							
21.500		141.00	70.00	●							
21.750		141.00	70.00				○				
21.830	55/64	141.00	70.00	○			○				
22.000		141.00	70.00	●			●				
22.200		141.00	70.00					○			
22.220	7/8	141.00	70.00	●							
22.400		141.00	70.00				○				
22.500		146.00	72.00	●			●				
22.620	57/64	146.00	72.00								

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSCo							
S	S	F			S	S		M	F	F
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124




Availability										
●			○			●				
○										
○										
●			●			●				
●			●			●				
●			●		○					
					○					
●			●							
●			●							
●			●							
●										
●										
●			●							
●			●							
●										
○										

C TiCN
 Gb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Straight shank twist drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		



d1				Availability			
mm	inch	l1 mm	l2 mm				
23.000		146.00	72.00	●			●
23.020	29/32	146.00	72.00	●			
23.420	59/64	146.00	72.00	○			
23.500		146.00	72.00	●			
23.810	15/16	151.00	75.00	●			
24.000		151.00	75.00	●			○
24.210	61/64	151.00	75.00	●			
24.500		151.00	75.00	●			
24.610	31/32	151.00	75.00	●			
25.000	63/64	151.00	75.00	●		●	
25.400	1	156.00	78.00	●		●	
25.500		156.00	78.00	●		○	
26.000		156.00	78.00	●			
26.190	1 1/32	156.00	78.00	●		○	
26.500		156.00	78.00	●			
26.590	1 3/64	162.00	81.00	●		○	
26.990	1 1/16	162.00	81.00	●		○	
27.000		162.00	81.00	●			
27.380	1 5/64	162.00	81.00	●		○	
27.500		162.00	81.00	●			
28.000		162.00	81.00	●			
28.500		168.00	84.00	●			
28.570	1 1/8	168.00	84.00	●			
29.000		168.00	84.00	●		○	
29.370	1 5/32	168.00	84.00	●			
29.500		168.00	84.00	●			
30.000		168.00	84.00	●			
30.160	1 3/16	174.00	87.00	○			○
30.960	1 7/32	174.00	87.00	●			○
31.000		174.00	87.00	●			
31.500		174.00	87.00	●		●	
31.750	1 1/4	180.00	90.00	●		○	
32.000		180.00	90.00	●			
32.150	1 17/64	180.00	90.00	○			○
32.940	1 19/64	180.00	90.00	○			○
33.000		180.00	90.00	○			○
34.500		186.00	93.00	○			○
34.920	1 3/8	186.00	93.00	○			○
35.000		186.00	93.00	○			○

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAlN
● a TiAlN nanoA
● A TiAlN SuperA



653	672	2460	329	330	659	1228	1261	2048	2461	2498
DIN 1897										
HSS			HSCO							
(S)	(S)	(F)			(S)	(S)		(M)	(F)	(F)
N	N	N	GV 120	GV 120	GV 120	GT 80	VA	P2000	GV 120	GT 80
right-hand	left-hand	right-hand	right-hand	left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
133	139	133	134	138	135	137	138	135	135	137
122	122	122	123	123	123	123	123	124	124	124


Straight shank twist drills



Availability										
●			●							
●					○					
●			●		○					
●			●							
●			●		○					
○			●		○					
			●		○					
					○					
○			●							
○										
○										
○										
○										
○					○					
					○					
					○					


 Straight shank twist
drills

Guhring no.	223	224	225	226	227	228	552	553		
Standard	DIN 1897									
Tool material	HSS									
Surface										
Type	N	H	W	N	H	W	GT 80	GT 80		
Cutting direction	right-hand	right-hand	right-hand	left-hand	left-hand	left-hand	right-hand	left-hand		
Tolerance	h8	h8	h8	h8	h8	h8	h8	h8		
Discount group	132	138	138	134	138	138	136	138		
Techn. data page	120	121	121	121	121	121	122	122		




d1		l1	l2
mm	inch	mm	mm
36.000		193.00	96.00
37.000		193.00	96.00
39.500		200.00	100.00
40.000		200.00	100.00
44.000		214.00	108.00
44.450	13/4	214.00	108.00
45.000		214.00	108.00
48.000		228.00	116.00
50.000		228.00	116.00

Availability	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Gühring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	●	○	●
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125




d1				Availability			
mm		inch	mm	mm			
0.500			20.00	3.00			●
0.600			21.00	3.50			●
0.700			23.00	4.50			●
0.800			24.00	5.00			●
0.900			25.00	5.50			●
1.000			26.00	6.00	●		●
1.020			26.00	6.00		●	●
1.040			26.00	6.00		●	●
1.070			28.00	7.00		●	●
1.090			28.00	7.00		●	●
1.100			28.00	7.00	●		●
1.180			28.00	7.00		●	●
1.190	3/64		30.00	8.00		●	●
1.200			30.00	8.00	●		●
1.300			30.00	8.00	●		●
1.320			30.00	8.00		●	●
1.400			32.00	9.00	●		●
1.500			32.00	9.00	●		●
1.510			34.00	10.00		●	●
1.590	1/16		34.00	10.00		●	●
1.600			34.00	10.00	●		●
1.610			34.00	10.00		●	●
1.700			34.00	10.00	●		●
1.780			36.00	11.00		●	●
1.800			36.00	11.00	●		●
1.850			36.00	11.00		●	●
1.900			36.00	11.00	●		●
1.930			38.00	12.00		●	●
1.980	5/64		38.00	12.00		○	●
1.990			38.00	12.00		●	●
2.000			38.00	12.00	●		●
2.060			38.00	12.00		●	●
2.080			38.00	12.00		●	●
2.100			38.00	12.00	●		●
2.180			40.00	13.00		●	●
2.200			40.00	13.00	●		●
2.250			40.00	13.00		●	●
2.260			40.00	13.00		●	●
2.300			40.00	13.00	●		●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Guhring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	● F	○	● F
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125




d1				Availability			
mm		inch		mm	mm	mm	mm
mm	inch	mm	mm	mm	mm	mm	mm
2.370		43.00	14.00	○	●	●	●
2.380	3/32	43.00	14.00	●	●	●	●
2.400		43.00	14.00	●	●	●	●
2.440		43.00	14.00	●	●	●	●
2.490		43.00	14.00	●	●	●	●
2.500		43.00	14.00	●	●	●	●
2.530		43.00	14.00	●	●	●	●
2.580		43.00	14.00	●	●	●	●
2.600		43.00	14.00	●	●	●	●
2.640		43.00	14.00	●	●	●	●
2.700		46.00	16.00	●	●	●	●
2.710		46.00	16.00	●	●	●	●
2.780	7/64	46.00	16.00	●	●	●	●
2.790		46.00	16.00	●	●	●	●
2.800		46.00	16.00	●	●	●	●
2.820		46.00	16.00	●	●	●	●
2.870		46.00	16.00	●	●	●	●
2.900		46.00	16.00	●	●	●	●
2.950		46.00	16.00	●	●	●	●
3.000		46.00	16.00	●	●	●	●
3.050		49.00	18.00	●	●	●	●
3.100		49.00	18.00	●	●	●	●
3.170	1/8	49.00	18.00	●	●	●	●
3.200		49.00	18.00	●	●	●	●
3.260		49.00	18.00	●	●	●	●
3.300		49.00	18.00	●	●	●	●
3.400		52.00	20.00	●	●	●	●
3.450		52.00	20.00	●	●	●	●
3.500		52.00	20.00	●	●	●	●
3.570	9/64	52.00	20.00	●	●	●	●
3.600		52.00	20.00	●	○	●	●
3.660		52.00	20.00	●	●	●	●
3.700		52.00	20.00	●	●	●	●
3.730		52.00	20.00	●	●	●	●
3.800		55.00	22.00	●	●	●	●
3.860		55.00	22.00	●	●	●	●
3.900		55.00	22.00	●	●	●	●
3.910		55.00	22.00	●	●	●	●
3.970	5/32	55.00	22.00	○	●	●	●



Straight shank twist drills

Gühring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	●	○	●
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125




d1				Availability			
mm		inch					
3.990							
4.000				●	●	●	●
4.040					●		●
4.090					●		●
4.100				●	●	●	●
4.200				●	●	●	●
4.220					●		●
4.300				●	●	●	●
4.370	11/64			○	●	●	○
4.390					●		●
4.400				●	●	●	●
4.500				●	●	●	●
4.570					●		●
4.600				●	●	●	●
4.620					●		●
4.650					●		●
4.700				●	●	●	●
4.760	3/16			●	●	●	●
4.800				●	●	●	●
4.850					●		●
4.900				●	●	●	●
4.920					●		●
4.980					●		●
5.000				●	●	●	●
5.060					●		●
5.100				●	●	●	●
5.110					●		●
5.160	13/64				●		●
5.180					●		●
5.200				●	●	●	●
5.220					●		●
5.300				●	●	●	●
5.310					●		●
5.400				●	●	●	●
5.410					●		●
5.500				●	●	●	●
5.560	7/32			●	●	●	●
5.600				●	●	●	●
5.610					●		●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Guhring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	● F	○	● F
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125




d1				Availability			
mm		inch					
5.700				○	●	●	●
5.790					●	●	●
5.800				●			
5.900					●	●	●
5.940					●	●	●
5.950	15/64			●			
6.000				●	●	●	●
6.040					●	●	●
6.100				●			
6.150					●	●	●
6.200				●			
6.250					●	●	●
6.300				●	●	●	●
6.350	1/4			●			
6.400				●	●	●	●
6.500				●			
6.530					●	●	●
6.600				●			
6.630					●	●	●
6.700				●			
6.750	17/64				●	●	●
6.800				●			
6.900				●	●	●	●
7.000				●			
7.030					●	●	●
7.100				●			
7.140	9/32			○	●	●	●
7.200				●			
7.300				●	●	●	●
7.370					●	●	●
7.400				●			
7.490					●	●	●
7.500				●			
7.540	19/64			○	●	●	●
7.600				●			
7.670					●	●	●
7.700				●			
7.800				●	●	●	●
7.900				●			



Straight shank twist drills

Guhring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	●	○	●
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125




d1				Availability			
mm	inch	l1	l2				
7.940	5/16	79.00	37.00	●	●	●	●
8.000		79.00	37.00	●	●	●	●
8.030		79.00	37.00		●	●	●
8.100		79.00	37.00	●	●	●	●
8.200		79.00	37.00	●	●	●	●
8.300		79.00	37.00	●	●	●	●
8.330	21/64	79.00	37.00	○	●	●	●
8.400		79.00	37.00		●	●	●
8.430		79.00	37.00		●	●	●
8.500		79.00	37.00	●	●	●	●
8.600		84.00	40.00	●		●	●
8.610		84.00	40.00		●		●
8.700		84.00	40.00	●		●	●
8.730	11/32	84.00	40.00		●		●
8.800		84.00	40.00		●		●
8.840		84.00	40.00		●		●
8.900		84.00	40.00		●		●
9.000		84.00	40.00	●	●	●	●
9.090		84.00	40.00		●		●
9.100		84.00	40.00		●		●
9.130	23/64	84.00	40.00		●		●
9.200		84.00	40.00		○		●
9.300		84.00	40.00	●	●		●
9.340		84.00	40.00		●		●
9.350		84.00	40.00		○		●
9.400		84.00	40.00	●	○		●
9.500		84.00	40.00	●	●		●
9.520	3/8	89.00	43.00		●		●
9.580		89.00	43.00		●		●
9.600		89.00	43.00		●		●
9.700		89.00	43.00		●		●
9.800		89.00	43.00	○	●		●
9.900		89.00	43.00	●	●		●
9.920	25/64	89.00	43.00		●		●
10.000		89.00	43.00	●	●		●
10.080		89.00	43.00		●		●
10.200		89.00	43.00		●		●
10.260		89.00	43.00		●		●
10.300		89.00	43.00		●		●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA




Guhring no.	1259	515	730	2463
Standard	DIN 1897		DIN 6539	
Tool material	M42	HSS-E-PM	Solid carbide	
Surface	○	●	○	●
Type	N	GT 500	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h7	h7
Discount group	138	115	102	102
Techn. data page	124	124	125	125



d1				Availability			
mm	inch	l1	l2				
10.320	13/32	89.00	43.00		●	●	●
10.490		89.00	43.00		●	●	●
10.500		89.00	43.00	●	●	●	●
10.720	27/64	95.00	47.00		●	●	●
11.000		95.00	47.00	●	●	●	●
11.110	7/16	95.00	47.00		●	●	○
11.500		95.00	47.00	●	●	●	○
11.510	29/64	95.00	47.00	○	○	●	●
11.700		95.00	47.00		○	●	●
11.800		95.00	47.00		○	●	●
11.910	15/32	102.00	51.00		●	●	○
12.000		102.00	51.00	●	●	●	●
12.300	31/64	102.00	51.00		●	●	●
12.500		102.00	51.00	●	●	●	●
12.700	1/2	102.00	51.00	○	●	●	●
13.000		102.00	51.00	○	●	●	●
13.100	33/64	102.00	51.00		●	●	●
13.490	17/32	107.00	54.00		●	●	●
13.500		107.00	54.00		●	●	●
14.000		107.00	54.00		●	●	●
14.290	9/16	111.00	56.00		●	●	●
15.000		111.00	56.00	●	●	●	●
15.870	5/8	115.00	58.00	○	●	●	●
16.000		115.00	58.00		●	●	●



Guhring no.	702
Standard	Guhring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Tolerance	h7
Discount group	102
Techn. data page	125




d1				Availability	
mm	inch	l1	l2		
0.500		30.00	5.50	●	
0.550		30.00	5.50	●	
0.600		30.00	5.50	●	
0.650		30.00	6.50	●	
0.700		30.00	6.50	●	
0.750		30.00	8.50	●	
0.800		30.00	8.50	●	
0.900		30.00	9.50	●	
0.950		30.00	11.00	●	
1.000		30.00	11.00	●	
1.050		30.00	11.00	●	
1.100		30.00	11.00	●	
1.200		30.00	13.00	●	
1.350		30.00	13.00	●	
1.400		30.00	13.00	●	
1.450		30.00	13.00	●	
1.500		30.00	13.00	●	
1.600		40.00	17.50	●	
1.650		40.00	17.50	●	
1.700		40.00	17.50	●	
1.800		40.00	17.50	●	
1.850		40.00	17.50	●	
1.900		40.00	17.50	●	
1.930		40.00	17.50	●	
2.000		40.00	17.50	●	
2.010		40.00	17.50	●	
2.050		40.00	17.50	●	
2.100		40.00	17.50	●	
2.200		40.00	17.50	●	
2.260		40.00	17.50	○	
2.300		40.00	17.50	●	
2.400		40.00	17.50	●	
2.490		40.00	17.50	●	
2.500		40.00	17.50	●	
2.530		45.00	20.00	●	
2.600		45.00	20.00	●	
2.700		45.00	20.00	●	
2.800		45.00	20.00	●	
3.000		45.00	20.00	●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Straight shank twist drills

Gühring no.	702
Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Tolerance	h7
Discount group	102
Techn. data page	125



d1				Availability	
mm	inch	l1 mm	l2 mm		
3.050		50.00	22.00	●	
3.100		50.00	22.00	●	
3.150		50.00	22.00	●	
3.200		50.00	22.00	●	
3.260		50.00	22.00	○	
3.300		50.00	22.00	●	
3.400		50.00	22.00	●	
3.450		50.00	22.00	●	
3.500		50.00	22.00	●	
3.570	9/64	50.00	22.00	●	
3.600		50.00	22.00	●	
3.910		50.00	22.00	○	
4.000		50.00	22.00	●	
4.200		50.00	25.00	○	
4.300		50.00	25.00	●	
4.400		50.00	25.00	○	
4.700		50.00	25.00	○	
4.900		50.00	25.00	●	
5.000		50.00	25.00	●	
5.200		50.00	25.00	●	
5.310		50.00	25.00	○	
5.610		50.00	25.00	○	
5.790		50.00	25.00	○	
5.950	15/64	50.00	25.00	○	
6.000		50.00	25.00	●	
6.250		65.00	30.00	●	
6.350	1/4	65.00	30.00	○	
6.500		65.00	30.00	●	



Straight shank twist drills

Guhring no. of set	201	200	36	11
as Guhring no.	205	205		
	Set in case	Drills only	Case only	Plastic stand only
Standard	DIN 338	DIN 338	Guhring standard	Guhring standard
Tool material	HSS	HSS	-	-
Surface finish	○ ●	○ ●	-	-
Type	N	N	-	-
Cutting direction	rh	rh	-	-
Discount group	130	130	138	138
Techn. data page				



Guhring drills are available in the sets of popular sizes as shown. For bench use the sets can be supplied in bakelite stands. For more portable use the box is recommended. Other drill set compositions on request.


composition of drill sets	drills per set	Code no.	Availability	Code no.	Availability	Code no.	Availability	Code no.	Availability
from 1.0 - 5.0 mm in increments of 0.1 mm	41			200 0,011	●			11 0,111	●
from 5.1 - 10.0 mm in increments of 0.1 mm	50	201 0,012	●	200 0,012	●			11 0,112	●
from 1.0 - 10.0 mm in increments of 0.5 mm	19	201 0,013	●	200 0,013	●	36 0,213	●	11 0,113	●
from 1.0 - 13 mm in increments of 0.5 mm	25	201 0,014	●	200 0,014	●	36 0,214	●	11 0,114	●
from 1.0 - 5.9 mm in increments of 0.1 mm	50	201 0,015	●	200 0,015	●	36 0,215	●	11 0,115	●
from 6.0 - 10.0 mm in increments of 0.1 mm	41	201 0,016	●	200 0,016	●	36 0,216	●		
from 1.0 - 6.0 mm in increments of 0.5 mm	11	201 0,017	○						
from 1.0 - 10.5 mm in increments of 0.5 mm supplementary sizes 3.3/4.2/6.8 und 10.2	24	201 0,018	●	200 0,018	●	36 0,218	●		
from 1.0 - 10.5 mm in increments of 0.5 mm supplementary sizes 1.9/2.1/2.6/2.9/3.2/3.3 3.8/4.2/5.1/6.8/7.9/10.2	32	201 0,019	●		○	36 0,219	●		
from 1/16 - 1/2 inch in increments of 1/64 inch	29	201 0,021	●					11 0,121	○
from 1.02 - 5.79 mm	60	201 0,028	○						

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Gühring no. of set	201	200	73	11
as Gühring no.	651	651		
	Set in case	Drills only	Case only	Plastic stand only
Standard	DIN 338	DIN 338	Gühring standard	Gühring standard
Tool material	HSS	HSS	-	-
Surface finish	S	S	-	-
Type	N	N	-	-
Cutting direction	rh	rh	-	-
Discount group	130	130	138	138
Techn. data page				

Straight shank twist drills

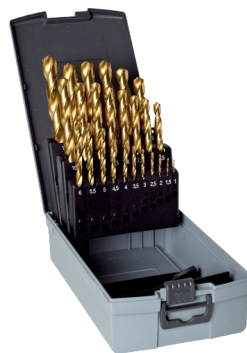

Gühring drills are available in the sets of popular sizes as shown. For bench use the sets can be supplied in bakelite stands. For more portable use the box is recommended. Other drill set compositions on request.

composition of drill sets	drills per set	Code no.	Availability	Code no.	Availability	Code no.	Availability	Code no.	Availability
from 1.0 - 10.0 mm in increments of 0.5 mm	19	201 6,013	●					11 0,113	●
from 1.0 - 13.0 mm in increments of 0.5 mm	25	201 6,014	●			73 0,614	●	11 0,114	●
from 1.0 - 5.9 mm in increments of 0.1 mm	50	201 6,015	●					11 0,115	●
from 6.0 - 10 mm in increments of 0.1 mm	41	201 6,016	●						
from 1/16 - 1/2 inch in increments of 1/64 inch	29	201 6,021	○	200 6,021	○			11 0,121	○
from 1/16 - 1/2 inch in increments of 1/32 inch	15	201 6,022	○	200 6,022	○				



Jobber Drill Sets

Straight shank twist drills

Guhring no. of set	201	201	200	195	11
as Guhring no.	305	605	605	1260	
	Set in case	Set in case	Drills only	Set in case	Plastic stand only
Standard	DIN 338	DIN 338	DIN 338	DIN 338	Guhring standard
Tool material	HSCO	HSCO	HSCO	HSCO	-
Surface finish	○ ●	○	○	○	-
Type	N	Ti	Ti	VA	-
Cutting direction	rh	rh	rh	rh	-
Discount group	130	134	134	130	138
Techn. data page					



Guhring drills are available in the sets of popular sizes as shown. For bench use the sets can be supplied in bakelite stands. For more portable use the box is recommended. Other drill set compositions on request.

composition of drill sets	drills per set	Code no.	Availability	Code no.	Availability	Code no.	Availability	Code no.	Availability	Code no.	Availability
from 1,0 - 10,0 mm in increments of 0.5 mm	19	201 3,013	●							11 0,113	●
from 1,0 - 13,0 mm in increments of 0.5 mm	25	201 3,014	●	201 8,014	●			195 8,014	●	11 0,114	●
from 1,0 - 5,9 mm in increments of 0.1 mm	50	201 3,015	●							11 0,115	●
from 6,0 - 10 mm in increments of 0.1 mm	41	201 3,016	●								
from 1,0 - 10,5 mm in increments of 0.5 mm supplementary sizes 3,3/4,2/6,8 and 10,2	24			201 8,018	●	200 8,018	○	195 8,018	●		
from 1/16 - 1/2 inch in increments of 1/64 inch	29	201 3,021	●								

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Straight shank twist drills

Guhring no. of set	2049	2050
as Guhring no.	2047	2048
	<i>Performance-drill sets in case</i>	<i>Performance-drill sets in case</i>
Standard	DIN 338	DIN 1897
Tool material	HSCO	HSCO
Surface finish	●	Ⓜ
Type	P2000	P2000
Cutting direction	rh	rh
Discount group	134	135
Techn. data page		



Guhring drills are available in the sets of popular sizes as shown. For bench use the sets can be supplied in bakelite stands. For more portable use the box is recommended. Other drill set compositions on request.

composition of drill sets	drills per set	Code no.	Availability	Code no.	Availability
from 1.0 - 5.0 mm in increments of 0.1 mm	41	2049 0,011	●		
from 5.1 - 10.0 mm in increments of 0.1 mm	50	2049 0,012	●	2050 0,012	○
from 1.0 - 10.0 mm in increments of 0.5 mm	19	2049 0,013	●	2050 0,013	●
from 1.0 - 13.0 mm in increments of 0.5 mm	25	2049 0,014	●	2050 0,014	○
from 1.0 - 10.5 mm in increments of 0.5 mm supplementary sizes 3.3/4.2/6.8 und 10.2	24	2049 0,018	●		



Twist drills with oversize straight shank

Straight shank twist drills

Guhring no.

512

Standard

Guhring std.

Tool material

HSCo

Surface

S

Type

GU 500

Cutting direction

right-hand

Tolerance


h8

Discount group

115

Techn. data page

125



d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
2.000	3.000	44.00	12.00	28.00
2.100	3.000	44.00	12.00	28.00
2.200	3.000	45.00	13.00	28.00
2.300	3.000	45.00	13.00	28.00
2.380	3.000	46.00	14.00	28.00
2.400	3.000	46.00	14.00	28.00
2.500	3.000	46.00	14.00	28.00
2.600	3.000	46.00	14.00	28.00
2.700	3.000	48.00	16.00	28.00
2.780	3.000	48.00	16.00	28.00
2.800	3.000	48.00	16.00	28.00
2.900	3.000	48.00	16.00	28.00
3.000	3.000	48.00	16.00	28.00
3.100	4.000	50.00	18.00	28.00
3.170	4.000	50.00	18.00	28.00
3.200	4.000	50.00	18.00	28.00
3.300	4.000	50.00	18.00	28.00
3.400	4.000	52.00	20.00	28.00
3.500	4.000	52.00	20.00	28.00
3.570	4.000	52.00	20.00	28.00
3.600	4.000	52.00	20.00	28.00
3.700	4.000	52.00	20.00	28.00
3.800	4.000	54.00	22.00	28.00
3.900	4.000	54.00	22.00	28.00
4.000	4.000	54.00	22.00	28.00
4.100	6.000	66.00	22.00	36.00
4.200	6.000	66.00	22.00	36.00
4.300	6.000	68.00	24.00	36.00
4.370	6.000	68.00	24.00	36.00
4.400	6.000	68.00	24.00	36.00
4.500	6.000	68.00	24.00	36.00
4.700	6.000	68.00	24.00	36.00
4.760	6.000	70.00	26.00	36.00
4.800	6.000	70.00	26.00	36.00
4.900	6.000	70.00	26.00	36.00
5.000	6.000	70.00	26.00	36.00
5.100	6.000	70.00	26.00	36.00
5.200	6.000	70.00	26.00	36.00
5.300	6.000	70.00	26.00	36.00

Availability

●
●
●
●
●
●
●
●
○
●
●
●
●
●
●
●
●
●
●
●
○
●
●
○
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●

○ bright

● steam tempered

◐ nitrided lands

● nitrided

● golden brown


● TiAlN

● TiAlN nanoA

● TiAlN SuperA



Guhring no.	512
Standard	Guhring std.
Tool material	HSCO
Surface	S
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	125



d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
5.400	6.000	72.00	28.00	36.00
5.500	6.000	72.00	28.00	36.00
5.560	6.000	72.00	28.00	36.00
5.600	6.000	72.00	28.00	36.00
5.800	6.000	72.00	28.00	36.00
5.900	6.000	72.00	28.00	36.00
5.950	6.000	72.00	28.00	36.00
6.000	6.000	72.00	28.00	36.00
6.100	8.000	75.00	31.00	36.00
6.200	8.000	75.00	31.00	36.00
6.300	8.000	75.00	31.00	36.00
6.350	8.000	75.00	31.00	36.00
6.400	8.000	75.00	31.00	36.00
6.500	8.000	75.00	31.00	36.00
6.600	8.000	75.00	31.00	36.00
6.750	8.000	78.00	34.00	36.00
6.800	8.000	78.00	34.00	36.00
6.900	8.000	78.00	34.00	36.00
7.000	8.000	78.00	34.00	36.00
7.100	8.000	78.00	34.00	36.00
7.140	8.000	78.00	34.00	36.00
7.200	8.000	78.00	34.00	36.00
7.300	8.000	78.00	34.00	36.00
7.500	8.000	78.00	34.00	36.00
7.540	8.000	81.00	37.00	36.00
7.600	8.000	81.00	37.00	36.00
7.800	8.000	81.00	37.00	36.00
7.900	8.000	81.00	37.00	36.00
7.940	8.000	81.00	37.00	36.00
8.000	8.000	81.00	37.00	36.00
8.100	10.000	87.00	37.00	40.00
8.200	10.000	87.00	37.00	40.00
8.300	10.000	87.00	37.00	40.00
8.330	10.000	87.00	37.00	40.00
8.500	10.000	87.00	37.00	40.00
8.600	10.000	91.00	40.00	40.00
8.730	10.000	91.00	40.00	40.00
8.900	10.000	91.00	40.00	40.00
9.000	10.000	91.00	40.00	40.00


Availability	
●	●
●	●
○	●
●	●
●	●
●	●
●	●
●	●
○	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
○	●
●	●
●	●
●	●
○	●
●	●
●	●
●	●
●	●



Twist drills with oversize straight shank

Straight shank twist drills

Guhring no.	512
Standard	Guhring std.
Tool material	HSCO
Surface	S
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	125




d1	d2	l1	l2	l3	Availability
mm	mm	mm	mm	mm	
9.100	10.000	91.00	40.00	40.00	●
9.130	10.000	91.00	40.00	40.00	○
9.400	10.000	91.00	40.00	40.00	●
9.520	10.000	93.00	43.00	40.00	○
9.900	10.000	93.00	43.00	40.00	○
9.920	10.000	93.00	43.00	40.00	○
10.000	10.000	93.00	43.00	40.00	●
10.100	12.000	100.00	43.00	45.00	○
10.200	12.000	100.00	43.00	45.00	○
10.300	12.000	100.00	43.00	45.00	●
10.320	12.000	100.00	43.00	45.00	●
10.500	12.000	100.00	43.00	45.00	●
10.900	12.000	104.00	47.00	45.00	○
11.000	12.000	104.00	47.00	45.00	●
11.100	12.000	104.00	47.00	45.00	●
11.110	12.000	104.00	47.00	45.00	○
11.200	12.000	104.00	47.00	45.00	●
11.300	12.000	104.00	47.00	45.00	●
11.400	12.000	104.00	47.00	45.00	○
11.500	12.000	104.00	47.00	45.00	●
11.510	12.000	104.00	47.00	45.00	○
11.700	12.000	104.00	47.00	45.00	○
11.800	12.000	104.00	47.00	45.00	●
12.000	12.000	108.00	51.00	45.00	●
12.300	16.000	111.00	51.00	48.00	○
12.500	16.000	111.00	51.00	48.00	●
13.490	16.000	114.00	54.00	48.00	○
13.500	16.000	114.00	54.00	48.00	●
14.000	16.000	114.00	54.00	48.00	●
14.290	16.000	116.00	56.00	48.00	●
14.500	16.000	116.00	56.00	48.00	●
15.000	16.000	116.00	56.00	48.00	●
15.870	16.000	118.00	58.00	48.00	○
16.000	16.000	118.00	58.00	48.00	●
16.500	20.000	126.00	60.00	50.00	●
16.670	20.000	126.00	60.00	50.00	○
17.500	20.000	128.00	62.00	50.00	●
18.000	20.000	128.00	62.00	50.00	●
18.500	20.000	130.00	64.00	50.00	●

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Guhring no.	512
Standard	Guhring std.
Tool material	HSCO
Surface	S
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	125



d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
19.500	20.000	132.00	66.00	50.00
20.000	20.000	132.00	66.00	50.00


Availability





Straight shank twist drills

Guhring no.	513
Standard	Guhring std.
Tool material	HSS-E-PM
Surface	F
Type	GT 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	125




d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
2.000	3.000	56.00	24.00	28.00
2.100	3.000	56.00	24.00	28.00
2.300	3.000	59.00	27.00	28.00
2.380	3.000	62.00	30.00	28.00
2.500	3.000	62.00	30.00	28.00
2.780	3.000	65.00	33.00	28.00
3.000	3.000	65.00	33.00	28.00
3.170	4.000	68.00	36.00	28.00
3.300	4.000	68.00	36.00	28.00
3.500	4.000	71.00	39.00	28.00
3.570	4.000	71.00	39.00	28.00
3.970	4.000	75.00	43.00	28.00
4.000	4.000	75.00	43.00	28.00
4.200	6.000	87.00	43.00	36.00
4.370	6.000	91.00	47.00	36.00
4.500	6.000	91.00	47.00	36.00
4.650	6.000	91.00	47.00	36.00
4.760	6.000	96.00	52.00	36.00
4.800	6.000	96.00	52.00	36.00
5.000	6.000	96.00	52.00	36.00
5.100	6.000	96.00	52.00	36.00
5.160	6.000	96.00	52.00	36.00
5.200	6.000	96.00	52.00	36.00
5.300	6.000	96.00	52.00	36.00
5.500	6.000	101.00	57.00	36.00
5.800	6.000	101.00	57.00	36.00
6.000	6.000	101.00	57.00	36.00
6.100	8.000	107.00	63.00	36.00
6.350	8.000	107.00	63.00	36.00
6.500	8.000	107.00	63.00	36.00
6.600	8.000	107.00	63.00	36.00
6.750	8.000	113.00	69.00	36.00
6.800	8.000	113.00	69.00	36.00
7.000	8.000	113.00	69.00	36.00
7.140	8.000	113.00	69.00	36.00
7.400	8.000	113.00	69.00	36.00
7.500	8.000	113.00	69.00	36.00
7.540	8.000	119.00	75.00	36.00
7.800	8.000	119.00	75.00	36.00

Availability
●
●
●
○
●
●
○
●
○
○
●
○
○
●
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○
○

○ bright ● steam tempered ◐ nitrided lands ● nitrided ● golden brown A TiAIN a TiAIN nanoA A TiAIN SuperA



Guhring no.	513
Standard	Guhring std.
Tool material	HSS-E-PM
Surface	F
Type	GT 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	125



d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
7.940	8.000	119.00	75.00	36.00
8.000	8.000	119.00	75.00	36.00
8.330	10.000	125.00	75.00	40.00
8.500	10.000	125.00	75.00	40.00
8.730	10.000	131.00	81.00	40.00
8.800	10.000	131.00	81.00	40.00
9.000	10.000	131.00	81.00	40.00
9.130	10.000	131.00	81.00	40.00
9.300	10.000	131.00	81.00	40.00
9.500	10.000	131.00	81.00	40.00
9.520	10.000	137.00	87.00	40.00
9.600	10.000	137.00	87.00	40.00
9.700	10.000	137.00	87.00	40.00
9.800	10.000	137.00	87.00	40.00
9.920	10.000	137.00	87.00	40.00
10.000	10.000	137.00	87.00	40.00
10.200	12.000	144.00	87.00	45.00
10.400	12.000	144.00	87.00	45.00
10.500	12.000	144.00	87.00	45.00
10.600	12.000	144.00	87.00	45.00
10.700	12.000	151.00	94.00	45.00
10.900	12.000	151.00	94.00	45.00
11.000	12.000	151.00	94.00	45.00
11.100	12.000	151.00	94.00	45.00
11.300	12.000	151.00	94.00	45.00
11.400	12.000	151.00	94.00	45.00
11.500	12.000	151.00	94.00	45.00
11.700	12.000	151.00	94.00	45.00
11.900	12.000	158.00	101.00	45.00
12.000	12.000	158.00	101.00	45.00
12.200	14.000	161.00	101.00	45.00
12.300	14.000	161.00	101.00	45.00
12.400	14.000	161.00	101.00	45.00
12.500	14.000	161.00	101.00	45.00
12.600	14.000	161.00	101.00	45.00
12.700	14.000	161.00	101.00	45.00
12.800	14.000	161.00	101.00	45.00
12.900	14.000	161.00	101.00	45.00
13.000	14.000	161.00	101.00	45.00


Availability	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	



Twist drills with oversize straight shank

Straight shank twist drills

Guhring no.	511
Standard	Guhring std.
Tool material	HSCo
Surface	S
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	126




d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
2.000	3.000	56.00	24.00	28.00
2.100	3.000	56.00	24.00	28.00
2.300	3.000	59.00	27.00	28.00
2.380	3.000	62.00	30.00	28.00
2.400	3.000	62.00	30.00	28.00
2.500	3.000	62.00	30.00	28.00
2.600	3.000	62.00	30.00	28.00
2.780	3.000	65.00	33.00	28.00
2.800	3.000	65.00	33.00	28.00
2.900	3.000	65.00	33.00	28.00
3.000	3.000	65.00	33.00	28.00
3.100	4.000	68.00	36.00	28.00
3.200	4.000	68.00	36.00	28.00
3.300	4.000	68.00	36.00	28.00
3.400	4.000	71.00	39.00	28.00
3.500	4.000	71.00	39.00	28.00
3.570	4.000	71.00	39.00	28.00
3.900	4.000	75.00	43.00	28.00
3.970	4.000	75.00	43.00	28.00
4.000	4.000	75.00	43.00	28.00
4.200	6.000	87.00	43.00	36.00
4.300	6.000	91.00	47.00	36.00
4.370	6.000	91.00	47.00	36.00
4.400	6.000	91.00	47.00	36.00
4.500	6.000	91.00	47.00	36.00
4.600	6.000	91.00	47.00	36.00
4.650	6.000	91.00	47.00	36.00
4.700	6.000	91.00	47.00	36.00
4.760	6.000	96.00	52.00	36.00
4.800	6.000	96.00	52.00	36.00
4.900	6.000	96.00	52.00	36.00
5.000	6.000	96.00	52.00	36.00
5.100	6.000	96.00	52.00	36.00
5.160	6.000	96.00	52.00	36.00
5.200	6.000	96.00	52.00	36.00
5.300	6.000	96.00	52.00	36.00
5.400	6.000	101.00	57.00	36.00
5.500	6.000	101.00	57.00	36.00
5.600	6.000	101.00	57.00	36.00

Availability	
●	
●	
○	
○	
●	
●	
○	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
○	
○	
●	
○	
●	
●	
●	
●	
○	
●	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Guhring no.	511
Standard	Guhring std.
Tool material	HSCO
Surface	S
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	126




d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
5.800	6.000	101.00	57.00	36.00
5.900	6.000	101.00	57.00	36.00
5.950	6.000	101.00	57.00	36.00
6.000	6.000	101.00	57.00	36.00
6.100	8.000	107.00	63.00	36.00
6.300	8.000	107.00	63.00	36.00
6.350	8.000	107.00	63.00	36.00
6.400	8.000	107.00	63.00	36.00
6.500	8.000	107.00	63.00	36.00
6.600	8.000	107.00	63.00	36.00
6.700	8.000	107.00	63.00	36.00
6.750	8.000	113.00	69.00	36.00
6.800	8.000	113.00	69.00	36.00
6.900	8.000	113.00	69.00	36.00
7.000	8.000	113.00	69.00	36.00
7.100	8.000	113.00	69.00	36.00
7.140	8.000	113.00	69.00	36.00
7.200	8.000	113.00	69.00	36.00
7.300	8.000	113.00	69.00	36.00
7.400	8.000	113.00	69.00	36.00
7.500	8.000	113.00	69.00	36.00
7.540	8.000	119.00	75.00	36.00
7.550	8.000	119.00	75.00	36.00
7.600	8.000	119.00	75.00	36.00
7.700	8.000	119.00	75.00	36.00
7.900	8.000	119.00	75.00	36.00
7.940	8.000	119.00	75.00	36.00
8.000	8.000	119.00	75.00	36.00
8.100	10.000	125.00	75.00	40.00
8.200	10.000	125.00	75.00	40.00
8.300	10.000	125.00	75.00	40.00
8.330	10.000	125.00	75.00	40.00
8.500	10.000	125.00	75.00	40.00
8.600	10.000	131.00	81.00	40.00
8.730	10.000	131.00	81.00	40.00
8.800	10.000	131.00	81.00	40.00
8.900	10.000	131.00	81.00	40.00
9.000	10.000	131.00	81.00	40.00
9.100	10.000	131.00	81.00	40.00

Availability	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	

Straight shank twist drills

Guhring no.	511
Standard	Guhring std.
Tool material	HSCO
Surface	Ⓢ
Type	GU 500
Cutting direction	right-hand
Tolerance	h8
Discount group	115
Techn. data page	126



d1	d2	l1	l2	l3
mm	mm	mm	mm	mm
9.130	10.000	131.00	81.00	40.00
9.400	10.000	131.00	81.00	40.00
9.500	10.000	131.00	81.00	40.00
9.520	10.000	137.00	87.00	40.00
9.550	10.000	137.00	87.00	40.00
9.600	10.000	137.00	87.00	40.00
9.700	10.000	137.00	87.00	40.00
9.900	10.000	137.00	87.00	40.00
9.920	10.000	137.00	87.00	40.00
10.000	10.000	137.00	87.00	40.00
10.100	12.000	144.00	87.00	45.00
10.200	12.000	144.00	87.00	45.00
10.400	12.000	144.00	87.00	45.00
10.500	12.000	144.00	87.00	45.00
10.600	12.000	144.00	87.00	45.00
10.700	12.000	151.00	94.00	45.00
10.800	12.000	151.00	94.00	45.00
10.900	12.000	151.00	94.00	45.00
11.000	12.000	151.00	94.00	45.00
11.110	12.000	151.00	94.00	45.00
11.300	12.000	151.00	94.00	45.00
11.510	12.000	151.00	94.00	45.00
11.700	12.000	151.00	94.00	45.00
11.900	12.000	158.00	101.00	45.00
11.910	12.000	158.00	101.00	45.00
12.000	12.000	158.00	101.00	45.00
12.500	16.000	161.00	101.00	48.00
12.700	16.000	161.00	101.00	48.00
13.000	16.000	161.00	101.00	48.00
13.500	16.000	166.00	106.00	48.00
13.890	16.000	166.00	106.00	48.00
14.000	16.000	166.00	106.00	48.00
14.500	16.000	169.00	109.00	48.00
15.000	16.000	169.00	109.00	48.00
15.500	16.000	172.00	112.00	48.00
16.000	16.000	172.00	112.00	48.00
16.500	20.000	181.00	115.00	50.00
16.670	20.000	181.00	115.00	50.00
17.000	20.000	181.00	115.00	50.00


Availability	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input checked="" type="radio"/>	
<input type="radio"/>	
<input checked="" type="radio"/>	

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

Guhring no.	268
Standard	Guhring std.
Tool material	HSS
Surface	●
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	126



d1		l1	l2
mm	inch		
13.000		156.00	82.00
13.490	17/32	156.00	82.00
13.500		156.00	82.00
14.000		156.00	82.00
14.290	9/16	157.00	83.00
14.500		157.00	83.00
15.000		157.00	83.00
15.080	19/32	157.00	83.00
15.500		157.00	83.00
15.870	5/8	157.00	83.00
16.000		157.00	83.00
16.500		158.00	84.00
16.670	21/32	158.00	84.00
17.000		158.00	84.00
17.460	11/16	158.00	84.00
17.500		158.00	84.00
18.000		158.00	84.00
19.000		158.00	84.00
19.050	3/4	159.00	85.00
19.840	25/32	159.00	85.00
20.000		159.00	85.00
21.000		159.00	85.00
21.430	27/32	159.00	85.00
22.000		159.00	85.00
22.220	7/8	159.00	85.00
23.000		159.00	85.00
23.020	29/32	159.00	85.00
23.810	15/16	160.00	86.00
24.000		160.00	86.00
25.000	63/64	160.00	86.00
25.400	1	160.00	86.00
28.570	1 1/8	160.00	86.00

Availability	
●	
○	
●	
●	
○	
●	
●	
○	
●	
●	
○	
●	
●	
●	
●	
○	
○	
○	
○	
●	
○	
○	
○	




Stub drills with 16.0 mm dia. shank

Straight shank twist drills

Guhring no.	128
Standard	Guhring std.
Tool material	HSCO
Surface	○
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	126

without point grind



d1	l1	l2	Availability
mm	mm	mm	
16.000	130.00	88.00	●
16.500	130.00	88.00	●
17.000	130.00	88.00	●
17.500	130.00	88.00	●
18.000	130.00	88.00	●
19.000	130.00	88.00	●
20.000	130.00	88.00	●
20.500	130.00	88.00	●
21.000	130.00	88.00	●
21.500	130.00	88.00	●
22.000	130.00	88.00	●
22.500	130.00	88.00	●
23.000	130.00	88.00	●
23.500	130.00	88.00	●
24.000	130.00	88.00	●
24.500	130.00	88.00	●
25.000	130.00	88.00	●
25.500	140.00	98.00	●
26.000	140.00	98.00	●
27.000	140.00	98.00	●
28.000	140.00	98.00	●
28.500	140.00	98.00	●
30.000	140.00	98.00	●
31.000	140.00	98.00	●
32.000	140.00	98.00	●
35.000	140.00	98.00	●
38.000	140.00	98.00	●
40.000	140.00	98.00	●

- bright
- ⊖ steam tempered
- nitrided lands
- nitrided
- golden brown
- Ⓐ TiAIN
- ⓐ TiAIN nanoA
- ⓐ TiAIN SuperA

Stub drills with 25.4 mm dia. shank




Straight shank twist drills

Gühring no.	129	136
Standard	Gühring std.	
Tool material	HSCO	
Surface		
Type	N	N
Cutting direction	right-hand	left-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	126	127

without point grind

without point grind



d1	l1	l2
mm	mm	mm
25.000	140.00	93.00
25.500	140.00	93.00
26.000	140.00	93.00
26.500	140.00	93.00
27.500	140.00	93.00
28.000	140.00	93.00
29.500	140.00	93.00
30.000	140.00	93.00
32.000	140.00	93.00
33.000	140.00	93.00
34.000	140.00	93.00
35.000	140.00	93.00
36.000	140.00	93.00
37.000	140.00	93.00
38.000	140.00	93.00
39.000	140.00	93.00
40.000	140.00	93.00


Availability	
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input type="checkbox"/>



90° NC-spotting drills

Straight shank twist
drills

Guhring no.	557	568	723
Standard	Guhring std.		
Tool material	HSS		Solid carbide
Surface	○	Ⓢ	○
Type	N	N	N
Point angle °	90	90	90
Cutting direction	right-hand	right-hand	right-hand
Tolerance	h6	h6	h6
Discount group	134	135	102
Techn. data page	127	127	127




d1		l1	l2
mm	inch	mm	mm
2.950		46.00	12.00
3.000		46.00	12.00
4.000		55.00	12.00
5.000		62.00	14.00
6.000		66.00	16.00
6.350	1/4	70.00	17.00
8.000		79.00	21.00
9.000		84.00	22.00
9.520	3/8	89.00	25.00
10.000		89.00	25.00
12.000		102.00	30.00
12.700	1/2	102.00	30.00
13.000		102.00	30.00
14.000		107.00	33.50
15.870	5/8	115.00	37.50
16.000		115.00	37.50
19.050	3/4	131.00	45.00
20.000		131.00	45.00
25.000	63/64	151.00	53.00
25.400	1	156.00	53.00

Availability		
●		
●	●	
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	○	●
●	●	●
●	○	●
●	●	●
●	●	●
●	○	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Gühring no.	546
Standard	Gühring std.
Tool material	Solid carbide
Surface	○
Type	N
Point angle °	142
Cutting direction	right-hand
Tolerance	h6
Discount group	102
Techn. data page	128




d1		l1	l2
mm	inch	mm	mm
4.000		55.00	12.00
5.000		62.00	14.00
6.000		66.00	16.00
8.000		79.00	21.00
10.000		89.00	25.00
12.000		102.00	30.00
16.000		115.00	37.50
20.000		131.00	45.00


Availability	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	



Straight shank drills double-ended

Straight shank twist drills

Guhring no.	554
Standard	Guhring std.
Tool material	HSS
Surface	
Type	DK 77
Point angle °	118
Cutting direction	right-hand
Tolerance	h8
Discount group	134
Techn. data page	128




d1				Availability
mm	inch	l1 mm	l2 mm	
1.500		32.00	6.00	○
1.600		34.00	6.30	●
1.900		36.00	7.10	●
2.000		38.00	7.50	●
2.100		38.00	7.50	●
2.200		40.00	8.50	●
2.300		40.00	8.50	●
2.400		43.00	9.50	●
2.450		43.00	9.50	○
2.500		43.00	9.50	●
2.600		43.00	9.50	●
2.700		46.00	10.60	●
2.780	7/64	46.00	10.60	○
2.800		46.00	10.60	●
2.900		46.00	10.60	●
3.000		46.00	10.60	●
3.050		49.00	11.20	○
3.100		49.00	11.20	●
3.170	1/8	49.00	11.20	●
3.200		49.00	11.20	●
3.250		49.00	11.20	●
3.260		49.00	11.20	○
3.300		49.00	11.20	●
3.400		52.00	12.50	●
3.500		52.00	12.50	●
3.570	9/64	52.00	12.50	○
3.600		52.00	12.50	●
3.650		52.00	12.50	○
3.700		52.00	12.50	●
3.800		55.00	14.00	●
3.900		55.00	14.00	○
3.970	5/32	55.00	14.00	○
4.000		55.00	14.00	●
4.100		55.00	14.00	●
4.200		55.00	14.00	●
4.300		58.00	15.50	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Gühring no.	554
Standard	Gühring std.
Tool material	HSS
Surface	
Type	DK 77
Point angle °	118
Cutting direction	right-hand
Tolerance	h8
Discount group	134
Techn. data page	128




d1				Availability	
mm	inch	l1 mm	l2 mm		
4.500		58.00	15.50	●	
4.600		58.00	15.50	●	
4.760	3/16	62.00	17.00	○	
4.800		62.00	17.00	●	
4.900		62.00	17.00	●	
5.000		62.00	17.00	●	
5.100		62.00	17.00	●	
5.200		62.00	17.00	●	
5.300		62.00	17.00	●	
5.400		66.00	19.00	○	
5.500		66.00	19.00	●	
5.560	7/32	66.00	19.00	○	
5.600		66.00	19.00	○	
5.700		66.00	19.00	●	
5.800		66.00	19.00	●	
5.900		66.00	19.00	○	
5.950	15/64	66.00	19.00	○	
6.000		66.00	19.00	●	
6.100		70.00	21.20	●	
6.300		70.00	21.20	○	
6.350	1/4	70.00	21.20	○	
6.500		70.00	21.20	●	
6.800		74.00	23.60	○	
7.000		74.00	23.60	●	
7.100		74.00	23.60	○	
7.500		74.00	23.60	○	
7.940	5/16	79.00	25.00	●	
8.000		79.00	25.00	●	
8.500		79.00	25.00	○	
8.600		84.00	25.00	○	
9.000		84.00	25.00	○	
9.500		84.00	25.00	●	
9.520	3/8	89.00	25.00	○	
10.000		89.00	25.00	●	



Micro-precision drills without oil feed

Straight shank twist drills

Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
0.050	1.000	25.00	0.40	●			
0.060	1.000	25.00	0.40	●			
0.070	1.000	25.00	0.50	●			
0.075	1.000	25.00	0.50	●			
0.080	1.000	25.00	0.50	●			
0.090	1.000	25.00	0.50	●			
0.100	1.000	25.00	0.50	●			
0.105	1.000	25.00	0.50	●			
0.110	1.000	25.00	0.50	●			
0.115	1.000	25.00	0.50	●			
0.120	1.000	25.00	0.50	●			
0.121	1.000	25.00	0.80	○			
0.125	1.000	25.00	0.80	●			
0.128	1.000	25.00	0.80	●			
0.130	1.000	25.00	0.80	●	○		
0.140	1.000	25.00	0.80	●	○		
0.143	1.000	25.00	0.80	●			
0.145	1.000	25.00	0.80	●			
0.147	1.000	25.00	0.80	○			
0.150	1.000	25.00	0.80	●	○		
0.155	1.000	25.00	1.10	●	○		
0.160	1.000	25.00	1.10	●	●	●	
0.170	1.000	25.00	1.10	●	○	●	
0.175	1.000	25.00	1.10	●	○		
0.180	1.000	25.00	1.10	●	○	●	
0.185	1.000	25.00	1.10	●	○		
0.190	1.000	25.00	1.10	●	●	●	
0.195	1.000	25.00	1.50	●	○		
0.200	1.000	25.00	1.50	●	●	●	●
0.205	1.000	25.00	1.50	●			
0.210	1.000	25.00	1.50	●	○	●	
0.215	1.000	25.00	1.50	○	○		
0.220	1.000	25.00	1.50	●	●	●	●
0.225	1.000	25.00	1.50	●	○		
0.230	1.000	25.00	1.50	●	○	●	
0.235	1.000	25.00	1.50	●	○	○	
0.240	1.000	25.00	1.50	●	●	●	
0.245	1.000	25.00	1.90	●	○	○	
0.250	1.000	25.00	1.90	●	○	●	●

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAlN ⓐ TiAlN nanoA Ⓐ TiAlN SuperA



Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129

Straight shank twist drills



d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
0.255	1.000	25.00	1.90	●	○	●	
0.260	1.000	25.00	1.90	●	○	●	●
0.265	1.000	25.00	1.90	●	○	○	
0.270	1.000	25.00	1.90	●	●	●	
0.275	1.000	25.00	1.90	●	○	○	
0.280	1.000	25.00	1.90	●	○	●	●
0.285	1.000	25.00	1.90	●		●	
0.290	1.000	25.00	1.90	●	●	●	
0.295	1.000	25.00	1.90	●	●	○	
0.300	1.000	25.00	1.90	●	●	●	●
0.305	1.000	25.00	2.40	●		●	
0.310	1.000	25.00	2.40	●	●	●	
0.315	1.000	25.00	2.40	●	○		
0.320	1.000	25.00	2.40	●		●	
0.325	1.000	25.00	2.40	●		●	
0.330	1.000	25.00	2.40	●	●	●	●
0.335	1.000	25.00	2.40	●		●	
0.340	1.000	25.00	2.40	●	●	●	
0.345	1.000	25.00	2.40	●	○		
0.350	1.000	25.00	2.40	●	●	●	●
0.355	1.000	25.00	2.40	●	○		
0.360	1.000	25.00	2.40	●	●	●	
0.365	1.000	25.00	2.40	●		●	
0.370	1.000	25.00	2.40	●	●	●	
0.375	1.000	25.00	2.40	●		●	
0.380	1.000	25.00	2.40	●	●	●	
0.385	1.000	25.00	3.00	●		●	
0.390	1.000	25.00	3.00	●	●	●	
0.400	1.000	25.00	3.00	●	●	●	●
0.405	1.000	25.00	3.00	●		●	
0.410	1.000	25.00	3.00	●	●	●	
0.415	1.000	25.00	3.00	○	○		
0.420	1.000	25.00	3.00	●	○	●	
0.425	1.000	25.00	3.00	●		●	
0.430	1.000	25.00	3.00	●	●	●	
0.432	1.000	25.00	3.00	●		●	
0.435	1.000	25.00	3.00	●	○		
0.440	1.000	25.00	3.00	●	●	●	
0.445	1.000	25.00	3.00	●		●	


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Micro-precision drills without oil feed

Straight shank twist drills

Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm				
0.450	1.000	25.00	3.00	●	●	●	●
0.460	1.000	25.00	3.00	●	○	●	●
0.465	1.000	25.00	3.00				
0.470	1.000	25.00	3.00	●	●	●	
0.475	1.000	25.00	3.00	○			
0.480	1.000	25.00	3.00	●	●	●	
0.485	1.000	25.00	3.40	●	○		
0.490	1.000	25.00	3.40	●	●	●	
0.495	1.000	25.00	3.40	●	○		
0.500	1.000	25.00	3.40	●	●	●	●
0.505	1.000	25.00	3.40	●		○	
0.510	1.000	25.00	3.40	●	●	●	
0.515	1.000	25.00	3.40	●			
0.520	1.000	25.00	3.40	●	●	●	
0.525	1.000	25.00	3.40	●	○		
0.530	1.000	25.00	3.40	●	●	●	
0.535	1.000	25.00	3.90	●	○		
0.540	1.000	25.00	3.90	●	○	●	
0.545	1.000	25.00	3.90		○		
0.550	1.000	25.00	3.90	●	●	●	
0.555	1.000	25.00	3.90	●	○		
0.560	1.000	25.00	3.90	●	●	●	
0.565	1.000	25.00	3.90		○		
0.570	1.000	25.00	3.90	●	●	●	
0.575	1.000	25.00	3.90	●			
0.580	1.000	25.00	3.90	●	●	●	
0.585	1.000	25.00	3.90	●			
0.590	1.000	25.00	3.90	●	●	●	
0.595	1.000	25.00	3.90	●			
0.600	1.000	25.00	3.90	●	●	●	●
0.605	1.000	25.00	4.20	●			
0.610	1.000	25.00	4.20	●	○	●	
0.615	1.000	25.00	4.20	●	○		
0.620	1.000	25.00	4.20	●	●	●	
0.625	1.000	25.00	4.20	●	○		
0.630	1.000	25.00	4.20	●	●	●	
0.632	1.000	25.00	4.20	●			
0.640	1.000	25.00	4.20	●	●	●	
0.650	1.000	25.00	4.20	●	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAIN ⓐ TiAIN nanoA Ⓐ TiAIN SuperA



Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129

Straight shank twist drills




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
0.655	1.000	25.00	4.20	●	○	●	
0.660	1.000	25.00	4.20	●	●	●	
0.665	1.000	25.00	4.20	●			
0.670	1.000	25.00	4.20	●	●	●	
0.675	1.000	25.00	4.80	●	○		
0.680	1.000	25.00	4.80	●	○	●	
0.685	1.000	25.00	4.80		○		
0.690	1.000	25.00	4.80	●	○	●	
0.695	1.000	25.00	4.80	●	○		
0.700	1.000	25.00	4.80	●	●	●	●
0.705	1.000	25.00	4.80	●			
0.710	1.000	25.00	4.80	●	●	●	
0.720	1.000	25.00	4.80	●	●	●	
0.725	1.000	25.00	4.80	●	○		
0.730	1.000	25.00	4.80	●	○	●	
0.740	1.000	25.00	4.80	●	●	●	
0.750	1.000	25.00	4.80	●			●
0.760	1.000	25.00	5.30	●	○	●	
0.770	1.000	25.00	5.30	●	○	●	
0.775	1.000	25.00	5.30	○	○		
0.780	1.000	25.00	5.30	●	○	●	
0.790	1.000	25.00	5.30	●	●	●	
0.795	1.500	25.00	5.30	●			
0.800	1.500	25.00	5.30	●	●	●	●
0.805	1.500	25.00	5.30		○		
0.810	1.500	25.00	5.30	●	●	●	●
0.820	1.500	25.00	5.30	●	●	●	
0.825	1.500	25.00	5.30	●			
0.830	1.500	25.00	5.30	●	●	●	●
0.840	1.500	25.00	5.30	●	○	○	
0.845	1.500	25.00	5.30	○			
0.850	1.500	25.00	5.30	●	●	●	●
0.855	1.500	25.00	6.00		○		
0.860	1.500	25.00	6.00	●	○	●	
0.870	1.500	25.00	6.00	●	●	●	
0.875	1.500	25.00	6.00		○		
0.880	1.500	25.00	6.00	●	●	●	
0.885	1.500	25.00	6.00		●		
0.890	1.500	25.00	6.00	●	●		



Micro-precision drills without oil feed

Straight shank twist drills

Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
0.900	1.500	25.00	6.00	●	●	●	●
0.910	1.500	25.00	6.00	●	○	●	●
0.915	1.500	25.00	6.00		○		
0.920	1.500	25.00	6.00	●	○	●	
0.925	1.500	25.00	6.00	○	○		
0.930	1.500	25.00	6.00	●	●		
0.935	1.500	25.00	6.00		○		
0.940	1.500	25.00	6.00	●	○	●	
0.945	1.500	25.00	6.00		○		
0.950	1.500	25.00	6.00	●	○	●	
0.960	1.500	25.00	6.80	●	●	●	
0.965	1.500	25.00	6.80		○		
0.970	1.500	25.00	6.80	●	●	●	
0.975	1.500	25.00	6.80		●		
0.980	1.500	25.00	6.80	●	●	●	
0.985	1.500	25.00	6.80		○		
0.990	1.500	25.00	6.80	●	○		
0.995	1.500	25.00	6.80		●		
1.000	1.500	25.00	6.80	●	●	●	●
1.005	1.500	25.00	6.80		○		
1.010	1.500	25.00	6.80	●	●		
1.020	1.500	25.00	6.80	●	●	●	
1.030	1.500	25.00	6.80	●	●		
1.035	1.500	25.00	6.80		○		
1.040	1.500	25.00	6.80	●	○	●	
1.050	1.500	25.00	6.80	●	●	●	●
1.055	1.500	25.00	6.80	●			
1.060	1.500	25.00	6.80	●	●		
1.070	1.500	25.00	7.60	●	●	●	
1.080	1.500	25.00	7.60	●	●	●	
1.085	1.500	25.00	7.60		○		
1.090	1.500	25.00	7.60	●	●		
1.100	1.500	25.00	7.60	●	○	●	●
1.110	1.500	25.00	7.60	●	○		
1.120	1.500	25.00	7.60	●	○		
1.125	1.500	25.00	7.60		○		
1.130	1.500	25.00	7.60	●			
1.140	1.500	25.00	7.60	●	●	●	●
1.150	1.500	25.00	7.60	●		●	●

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown Ⓐ TiAlN ⓐ TiAlN nanoA Ⓐ TiAlN SuperA



Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	Ⓢ	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129

Straight shank twist drills




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
1.160	1.500	25.00	7.60	●	●		
1.170	1.500	25.00	7.60	●	●		
1.175	1.500	25.00	7.60	●			
1.180	1.500	25.00	7.60	●	●	●	
1.190	1.500	25.00	8.50	●	○	●	
1.200	1.500	25.00	8.50	●	●	●	●
1.210	1.500	25.00	8.50	●	●		
1.220	1.500	25.00	8.50	●	●	●	
1.230	1.500	25.00	8.50	●			
1.240	1.500	25.00	8.50	●			
1.250	1.500	25.00	8.50	●	○	●	●
1.260	1.500	25.00	8.50	●			
1.265	1.500	25.00	8.50	○			
1.270	1.500	25.00	8.50	●	○		
1.280	1.500	25.00	8.50	●	●		
1.285	1.500	25.00	8.50		○		
1.290	1.500	25.00	8.50	●	○		
1.300	1.500	25.00	8.50	●	●	●	●
1.310	1.500	25.00	8.50	●	○		
1.320	1.500	25.00	8.50	●	○		
1.325	1.500	25.00	9.50	●			
1.330	1.500	25.00	9.50	●	○		
1.340	1.500	25.00	9.50	●			
1.350	1.500	25.00	9.50	●	○	●	●
1.360	1.500	25.00	9.50		○		
1.370	1.500	25.00	9.50	●			
1.375	1.500	25.00	9.50		○		
1.380	1.500	25.00	9.50	●			
1.390	1.500	25.00	9.50	●		○	
1.400	1.500	25.00	9.50	●	●	●	●
1.405	1.500	25.00	9.50		○		
1.410	1.500	25.00	9.50	●			
1.420	1.500	25.00	9.50	●		●	
1.425	1.500	25.00	9.50		○		
1.430	1.500	25.00	9.50	●			
1.440	1.500	25.00	9.50	●			
1.450	1.500	25.00	9.50	●	●	●	
1.460	2.000	30.00	9.50	●	○		
1.470	2.000	30.00	9.50	●			



Micro-precision drills without oil feed

Straight shank twist drills

Guhring no.	301	303	660	701
Standard	DIN 1899			Guhring std.
Tool material	HSS-E-PM			Solid carbide
Surface	○	○	● (S)	○
Type	N	N	N	N
Cutting direction	right-hand	left-hand	right-hand	right-hand
Tolerance	0/-0,004	0/-0,004	0/-0,004	0/-0,004
Discount group	134	138	135	102
Techn. data page	129	129	129	129




d1	d2 h8	l1	l2	Availability			
mm	mm	mm	mm	301	303	660	701
1.500	2.000	30.00	9.50	●	●	●	
1.520	2.000	30.00	10.60	●			
1.525	2.000	30.00	10.60		○		
1.530	2.000	30.00	10.60	●			
1.540	2.000	30.00	10.60	●			
1.550	2.000	30.00	10.60	●			
1.590	2.000	30.00	10.60	●			
1.600	2.000	30.00	10.60	●	○		
1.610	2.000	30.00	10.60	●			
1.615	2.000	30.00	10.60		○		
1.630	2.000	30.00	10.60	●			
1.640	2.000	30.00	10.60	○			
1.650	2.000	30.00	10.60	●			
1.660	2.000	30.00	10.60	●			
1.690	2.000	30.00	10.60	○			
1.700	2.000	30.00	10.60	●			
1.710	2.000	30.00	11.80	●			
1.715	2.000	30.00	11.80	○			
1.730	2.000	30.00	11.80	●			
1.745	2.000	30.00	11.80	●			
1.750	2.000	30.00	11.80	●			
1.775	2.000	30.00	11.80	●			
1.800	2.000	30.00	11.80	●	○	●	
1.830	2.000	30.00	11.80	●			
1.840	2.000	30.00	11.80	●	○		
1.850	2.000	30.00	11.80	●			
1.860	2.000	30.00	11.80	●			
1.900	2.000	30.00	11.80	●		●	
1.920	2.000	30.00	13.20	●			
1.930	2.000	30.00	13.20	○			

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Guhring no.	3899
Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	N
Cutting direction	right-hand
Tolerance	h7
Discount group	102
Techn. data page	129

NEW




d1	d2 h8	l1	l2	Availability
mm	mm	mm	mm	
0.100	3.000	38.00	1.20	●
0.150	3.000	38.00	2.00	●
0.200	3.000	38.00	2.50	●
0.250	3.000	38.00	3.00	●
0.300	3.000	38.00	5.00	●
0.310	3.000	38.00	5.00	●
0.350	3.000	38.00	6.00	●
0.370	3.000	38.00	6.00	●
0.400	3.000	38.00	7.00	●
0.450	3.000	38.00	7.00	●
0.500	3.000	38.00	7.00	●
0.550	3.000	38.00	7.00	●
0.600	3.000	38.00	7.00	●
0.640	3.000	38.00	7.00	●
0.650	3.000	38.00	7.00	●
0.700	3.000	38.00	8.00	●
0.710	3.000	38.00	8.00	●
0.720	3.000	38.00	8.00	●
0.740	3.000	38.00	8.00	●
0.750	3.000	38.00	8.00	●
0.760	3.000	38.00	8.00	○
0.770	3.000	38.00	8.00	○
0.780	3.000	38.00	8.00	○
0.790	3.000	38.00	8.00	●
0.800	3.000	38.00	10.00	●
0.810	3.000	38.00	10.00	●
0.820	3.000	38.00	10.00	●
0.830	3.000	38.00	10.00	○
0.840	3.000	38.00	10.00	○
0.850	3.000	38.00	10.00	○
0.860	3.000	38.00	10.00	○
0.870	3.000	38.00	10.00	○
0.880	3.000	38.00	10.00	○
0.890	3.000	38.00	10.00	○
0.900	3.000	38.00	10.00	○
0.910	3.000	38.00	10.00	●
0.920	3.000	38.00	10.00	●
0.930	3.000	38.00	10.00	●
0.940	3.000	38.00	10.00	●



Straight shank twist drills

Guhring no.	3899
Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	N
Cutting direction	right-hand
Tolerance	h7
Discount group	102
Techn. data page	129

NEW




d1	d2 h8	l1	l2	Availability
mm	mm	mm	mm	
0.950	3.000	38.00	10.00	●
0.960	3.000	38.00	10.00	○
0.970	3.000	38.00	10.00	○
0.980	3.000	38.00	10.00	○
0.990	3.000	38.00	10.00	●
1.000	3.000	38.00	10.00	●
1.100	3.000	38.00	10.00	●
1.110	3.000	38.00	10.00	○
1.150	3.000	38.00	10.00	●
1.200	3.000	38.00	10.00	●
1.210	3.000	38.00	10.00	○
1.400	3.000	38.00	10.00	●
1.450	3.000	38.00	10.00	●
1.500	3.000	38.00	10.00	●
1.510	3.000	38.00	10.00	●
1.520	3.000	38.00	10.00	●
1.550	3.000	38.00	10.00	●
1.600	3.000	38.00	12.00	●
1.650	3.000	38.00	12.00	●
1.700	3.000	38.00	12.00	●
1.800	3.000	38.00	12.00	●
1.810	3.000	38.00	12.00	●
1.830	3.000	38.00	12.00	●
1.850	3.000	38.00	12.00	●
1.900	3.000	38.00	12.00	●
1.920	3.000	38.00	12.00	●
1.950	3.000	38.00	12.00	●
1.980	3.000	38.00	12.00	●
2.000	3.000	38.00	12.00	●
2.050	3.000	38.00	12.00	○
2.100	3.000	38.00	12.00	●
2.400	3.000	38.00	12.00	●
2.500	3.000	38.00	12.00	●
2.600	3.000	38.00	12.00	●
2.750	3.000	38.00	12.00	●
2.950	3.000	38.00	12.00	●
3.000	3.000	38.00	12.00	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	6400
Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	N
Drilling depth	4xD
Cutting direction	right-hand
Tolerance	m7
Discount group	164
Techn. data page	130

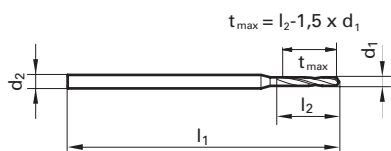


d1	d2 h6	l1	l2	Availability
mm	mm	mm	mm	
0.500	3.000	47.00	3.00	●
0.550	3.000	47.00	3.30	●
0.600	3.000	47.00	3.60	●
0.650	3.000	47.00	3.90	●
0.700	3.000	47.00	4.20	●
0.750	3.000	47.00	4.50	●
0.800	3.000	47.00	4.80	●
0.850	3.000	47.00	5.10	●
0.900	3.000	47.00	5.40	●
0.950	3.000	47.00	5.70	●
1.000	3.000	47.00	6.00	●
1.050	3.000	47.00	6.30	●
1.100	3.000	47.00	6.60	●
1.150	3.000	47.00	6.90	●
1.200	3.000	47.00	7.20	●
1.250	3.000	47.00	7.50	●
1.300	3.000	47.00	7.80	●
1.350	3.000	47.00	8.10	●
1.400	3.000	47.00	8.40	●
1.450	3.000	47.00	8.70	●
1.500	3.000	47.00	9.00	●
1.550	3.000	47.00	9.30	●
1.590	3.000	47.00	9.60	●
1.600	3.000	47.00	9.60	●
1.650	3.000	47.00	9.90	●
1.700	3.000	47.00	10.20	●
1.750	3.000	47.00	10.50	●
1.800	3.000	52.00	10.80	●
1.850	3.000	52.00	11.10	●
1.900	3.000	52.00	11.40	●
1.950	3.000	52.00	11.70	●
1.980	4.000	59.00	12.00	●
2.000	4.000	59.00	12.00	●
2.050	4.000	59.00	12.30	●
2.100	4.000	59.00	12.60	●
2.150	4.000	59.00	12.90	●



Straight shank twist drills


Gühring no.	6401
Standard	Gühring std.
Tool material	Solid carbide
Surface	A
Type	N
Drilling depth	7xD
Cutting direction	right-hand
Tolerance	m7
Discount group	164
Techn. data page	130

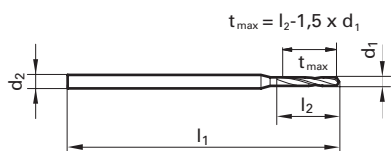

d1	d2 h6	l1	l2	Availability
mm	mm	mm	mm	
0.500	3.000	47.00	4.00	●
0.550	3.000	47.00	4.40	●
0.600	3.000	47.00	4.80	●
0.650	3.000	47.00	5.20	●
0.700	3.000	47.00	5.60	●
0.750	3.000	47.00	6.00	●
0.800	3.000	47.00	6.40	●
0.850	3.000	47.00	6.80	●
0.900	3.000	47.00	7.20	●
0.950	3.000	47.00	7.60	●
1.000	3.000	47.00	8.00	●
1.050	3.000	47.00	8.40	●
1.100	3.000	47.00	8.80	●
1.150	3.000	47.00	9.20	●
1.200	3.000	52.00	10.80	●
1.250	3.000	52.00	11.30	●
1.300	3.000	52.00	11.70	●
1.350	3.000	52.00	12.20	●
1.400	3.000	52.00	12.60	●
1.450	3.000	52.00	13.10	●
1.500	3.000	52.00	13.50	●
1.550	3.000	52.00	14.00	●
1.590	3.000	52.00	14.40	●
1.600	3.000	52.00	14.40	●
1.650	3.000	52.00	14.90	●
1.700	3.000	52.00	15.30	●
1.750	3.000	52.00	15.80	●
1.800	3.000	52.00	16.20	●
1.850	3.000	52.00	16.70	●
1.900	3.000	52.00	17.10	●
1.950	3.000	52.00	17.60	●
1.980	4.000	63.00	18.00	●
2.000	4.000	63.00	18.00	●
2.050	4.000	63.00	18.50	●
2.100	4.000	63.00	18.90	●
2.150	4.000	63.00	19.40	●

Straight shank twist drills

Guhring no.	6401
Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	N
Drilling depth	7xD
Cutting direction	right-hand
Tolerance	m7
Discount group	164
Techn. data page	130




d1	d2 h6	l1	l2	Availability
mm	mm	mm	mm	
2.200	4.000	63.00	19.80	●
2.250	4.000	63.00	20.30	●
2.300	4.000	63.00	20.70	●
2.350	4.000	63.00	21.20	●
2.380	4.000	63.00	21.60	●
2.400	4.000	63.00	21.60	●
2.450	4.000	63.00	22.10	●
2.500	4.000	63.00	22.50	●
2.550	4.000	63.00	23.00	●
2.600	4.000	67.00	23.40	●
2.650	4.000	67.00	23.90	●
2.700	4.000	67.00	24.30	●
2.750	4.000	67.00	24.80	●
2.780	4.000	67.00	25.20	●
2.800	4.000	67.00	25.20	●
2.850	4.000	67.00	25.70	●
2.900	4.000	67.00	26.10	●
2.950	4.000	67.00	26.60	●
3.000	4.000	67.00	27.00	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Gühring no.	6408
Standard	Gühring std.
Tool material	Solid carbide
Surface	A
Type	N
Drilling depth	8xD
Cutting direction	right-hand
Tolerance	h7
Discount group	164
Techn. data page	130

NEW

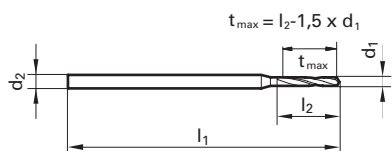


d1	d2 h6	l1	l2	Availability
mm	mm	mm	mm	
1.400	4.000	52.00	15.00	●
1.450	4.000	52.00	16.00	●
1.500	4.000	52.00	17.00	●
1.550	4.000	52.00	17.00	●
1.590	4.000	52.00	18.00	●
1.600	4.000	52.00	18.00	●
1.650	4.000	52.00	18.00	●
1.700	4.000	56.00	19.00	●
1.750	4.000	56.00	19.00	●
1.800	4.000	56.00	20.00	●
1.850	4.000	56.00	20.00	●
1.900	4.000	56.00	21.00	●
1.950	4.000	56.00	21.00	●
1.980	4.000	56.00	22.00	●
2.000	4.000	56.00	22.00	●
2.050	4.000	56.00	23.00	●
2.100	4.000	62.00	23.00	●
2.150	4.000	62.00	24.00	●
2.200	4.000	62.00	24.00	●
2.250	4.000	62.00	25.00	●
2.300	4.000	62.00	25.00	●
2.350	4.000	62.00	26.00	●
2.380	4.000	62.00	26.00	●
2.400	4.000	62.00	26.00	●
2.450	4.000	62.00	27.00	●
2.500	4.000	62.00	28.00	●
2.550	4.000	62.00	28.00	●
2.600	4.000	66.00	29.00	●
2.650	4.000	66.00	29.00	●
2.700	4.000	66.00	30.00	●
2.750	4.000	66.00	30.00	●
2.780	4.000	66.00	31.00	●
2.800	4.000	66.00	31.00	●
2.850	4.000	66.00	31.00	●
2.900	4.000	66.00	32.00	●
2.950	4.000	66.00	32.00	●



Straight shank twist drills

Guhring no.	6408
Standard	Guhring std.
Tool material	Solid carbide
Surface	A
Type	N
Drilling depth	8xD
Cutting direction	right-hand
Tolerance	h7
Discount group	164
Techn. data page	130

NEW

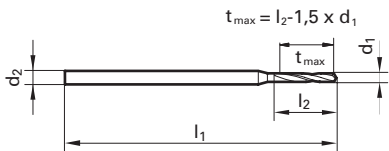

d1	d2 h6	l1	l2
mm	mm	mm	mm
3.000	4.000	66.00	33.00

Availability




bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Guhring no.	1131	1132
Standard	Guhring std.	
Tool material	HSCO	
Surface	○	Ⓢ
Type	GT 80 IK	GT 80 IK
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	134	135
Techn. data page	130	131

Straight shank twist drills




d1	d2 h6	l1	l2	l3
mm	mm	mm	mm	mm
17.000	18.000	143.00	93.00	48.00
17.500	18.000	143.00	93.00	48.00
18.000	18.000	143.00	93.00	48.00
18.500	20.000	153.00	101.00	50.00
19.000	20.000	153.00	101.00	50.00
19.500	20.000	153.00	101.00	50.00
20.000	20.000	153.00	101.00	50.00

Availability	
●	●
○	●
●	●
●	●
○	●
●	●



Straight shank twist drills

Guhring no.	211	561	666	311
Standard	DIN 339			
Tool material	HSS			HSCO
Surface				
Type	N	N	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	139	138
Techn. data page	131	131	131	132




d1				Availability			
mm		inch	mm	mm			
0.800			42.00	22.00	●		
1.000			48.00	26.00	●		●
1.050			48.00	26.00	●		
1.080			50.00	28.00	○		
1.100			50.00	28.00	●		○
1.110			50.00	28.00	○		
1.150			50.00	28.00	●		
1.200			52.00	30.00	●		●
1.230			52.00	30.00	○		
1.250			52.00	30.00	●		
1.270			52.00	30.00	●		
1.280			52.00	30.00	●		○
1.300			52.00	30.00	●		●
1.320			52.00	30.00	●		
1.350			55.00	33.00	○		●
1.380			55.00	33.00	●		
1.400			55.00	33.00	●		
1.430			55.00	33.00	○		
1.450			55.00	33.00	●		○
1.460			55.00	33.00	○		
1.480			55.00	33.00	○		
1.500			55.00	33.00	●		●
1.510			58.00	35.00			○
1.520			58.00	35.00	●		
1.550			58.00	35.00			○
1.580			58.00	35.00	○		
1.600			58.00	35.00	●		●
1.620			58.00	35.00	●		
1.650			58.00	35.00	○		
1.700			58.00	35.00	●		●
1.800			62.00	38.00	●		●
1.810			62.00	38.00	○		
1.850			62.00	38.00	●		
1.870			62.00	38.00	○		
1.880			62.00	38.00	○		
1.900			62.00	38.00	●		●
1.930			66.00	41.00	●		●
1.950			66.00	41.00	●		●
1.980	5/64		66.00	41.00	●		○



Bushing length twist drills

Straight shank twist drills

Guhring no.	211	561	666	311
Standard	DIN 339			
Tool material	HSS			HSCO
Surface				
Type	N	N	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	139	138
Techn. data page	131	131	131	132




d1				Availability			
mm		inch	mm	l1	l2		
1.990			66.00	41.00			
2.000			66.00	41.00			
2.020			66.00	41.00			
2.030			66.00	41.00			
2.050			66.00	41.00			
2.100			66.00	41.00			
2.150			70.00	44.00			
2.200			70.00	44.00			
2.220			70.00	44.00			
2.300			70.00	44.00			
2.320			70.00	44.00			
2.350			70.00	44.00			
2.360			70.00	44.00			
2.400			74.00	47.00			
2.450			74.00	47.00			
2.470			74.00	47.00			
2.500			74.00	47.00			
2.520			74.00	47.00			
2.530			74.00	47.00			
2.550			74.00	47.00			
2.600			74.00	47.00			
2.620			74.00	47.00			
2.650			74.00	47.00			
2.680			79.00	51.00			
2.700			79.00	51.00			
2.730			79.00	51.00			
2.800			79.00	51.00			
2.900			79.00	51.00			
2.930			79.00	51.00			
2.950			79.00	51.00			
2.960			79.00	51.00			
3.000			79.00	51.00			
3.050			84.00	55.00			
3.070			84.00	55.00			
3.100			84.00	55.00			
3.120			84.00	55.00			
3.150			84.00	55.00			
3.170	1/8		84.00	55.00			
3.200			84.00	55.00			

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Guhring no.	211	561	666	311
Standard	DIN 339			
Tool material	HSS			HSCO
Surface				
Type	N	N	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	139	138
Techn. data page	131	131	131	132




d1				Availability			
mm		inch	mm				
3.250			84.00	55.00	●		
3.260			84.00	55.00	●		
3.300			84.00	55.00	●	●	●
3.400			91.00	60.00	●		●
3.480			91.00	60.00	○		
3.500			91.00	60.00	●		●
3.570	9/64		91.00	60.00	●		●
3.600			91.00	60.00	●		●
3.700			91.00	60.00	●		○
3.730			91.00	60.00	○		
3.800			96.00	64.00	●		●
3.900			96.00	64.00	●		●
3.950			96.00	64.00	○		
4.000			96.00	64.00	●	●	●
4.100			96.00	64.00	●	●	●
4.200			96.00	64.00	●		
4.250			96.00	64.00	○		
4.300			102.00	69.00	●		●
4.400			102.00	69.00	●	○	
4.500			102.00	69.00	●		○
4.580			102.00	69.00	○		
4.600			102.00	69.00	●		●
4.700			102.00	69.00	●		
4.750			102.00	69.00	○		
4.800			108.00	74.00	●	○	
4.900			108.00	74.00	●		●
4.950			108.00	74.00	○		
5.000			108.00	74.00	●	●	●
5.100			108.00	74.00	●		○
5.150			108.00	74.00	●		○
5.200			108.00	74.00	●		○
5.300			108.00	74.00	●		●
5.330			116.00	80.00	○		
5.350			116.00	80.00	●		
5.400			116.00	80.00	●		○
5.500			116.00	80.00	●		●
5.550			116.00	80.00	●		
5.600			116.00	80.00	●		●
5.700			116.00	80.00	●		



Bushing length twist drills

Straight shank twist drills

Guhring no.	211	561	666	311
Standard	DIN 339			
Tool material	HSS			HSCO
Surface				
Type	N	N	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	139	138
Techn. data page	131	131	131	132




d1				Availability			
mm		inch	mm	l1		l2	
5.800			116.00	80.00	●	●	
5.900			116.00	80.00	●		
6.000			116.00	80.00	●	●	
6.100			124.00	86.00	●	●	●
6.150			124.00	86.00	●		
6.200			124.00	86.00	●	○	
6.300			124.00	86.00	●	●	
6.350	1/4		124.00	86.00	○	○	
6.400			124.00	86.00	●	○	○
6.500			124.00	86.00	●	●	
6.550			124.00	86.00	○		
6.600			124.00	86.00	●	○	
6.700			124.00	86.00	●	○	
6.800			133.00	93.00	●	●	●
6.900			133.00	93.00	●	○	
7.000			133.00	93.00	●	●	●
7.050			133.00	93.00	○		
7.100			133.00	93.00	●	○	
7.150			133.00	93.00	○		
7.200			133.00	93.00	●	○	
7.300			133.00	93.00	○	○	
7.400			133.00	93.00	●		
7.500			133.00	93.00	○	○	
7.600			142.00	100.00	○	○	
7.700			142.00	100.00	○	○	
7.750			142.00	100.00	○		
7.800			142.00	100.00	●	○	
7.900			142.00	100.00	○	○	
7.940	5/16		142.00	100.00	○	○	
7.950			142.00	100.00	○		
8.000			142.00	100.00	●	●	
8.100			142.00	100.00	●		
8.120			142.00	100.00	○		
8.200			142.00	100.00	●	●	○
8.300			142.00	100.00	○		
8.400			142.00	100.00	●	●	
8.500			142.00	100.00	●	●	○
8.600			151.00	107.00	●	○	
8.700			151.00	107.00	●		

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA




Straight shank twist drills

Guhring no.	211	561	666	311
Standard	DIN 339			
Tool material	HSS			HSCO
Surface				
Type	N	N	N	N
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	139	138
Techn. data page	131	131	131	132



d1				Availability							
mm		inch		mm		mm					
8.730	11/32	151.00	107.00	○							
8.900		151.00	107.00	○							
9.000		151.00	107.00	●				●			
9.100		151.00	107.00	●							
9.200		151.00	107.00	●							
9.300		151.00	107.00	●							
9.500		151.00	107.00	●							
9.600		162.00	116.00	○					○		
9.650		162.00	116.00	○							
9.700		162.00	116.00	○							
9.750		162.00	116.00	○							
9.800		162.00	116.00	●					○		
9.850		162.00	116.00						○		
9.900		162.00	116.00	○							
10.000		162.00	116.00	●				●		●	
10.200		162.00	116.00	●				●			
10.500		162.00	116.00	●							
10.800		173.00	125.00	○						○	
10.900		173.00	125.00	○							
11.000		173.00	125.00	●					○		
11.300		173.00	125.00	○							
11.400		173.00	125.00	○							
11.500		173.00	125.00	○					○		
11.700		173.00	125.00	○							
11.750		173.00	125.00	●							
11.910	15/32	184.00	134.00						○		
12.000		184.00	134.00	●							
12.100		184.00	134.00	○							
12.250		184.00	134.00	○							
12.300	31/64	184.00	134.00	○							
12.500		184.00	134.00	○					○		
13.000		184.00	134.00	●				●			
13.100	33/64	184.00	134.00	○							
13.200		184.00	134.00	○							
13.300		194.00	142.00							○	
13.400		194.00	142.00	○						○	
13.500		194.00	142.00	○							
13.600		194.00	142.00	○							
13.800		194.00	142.00	●							

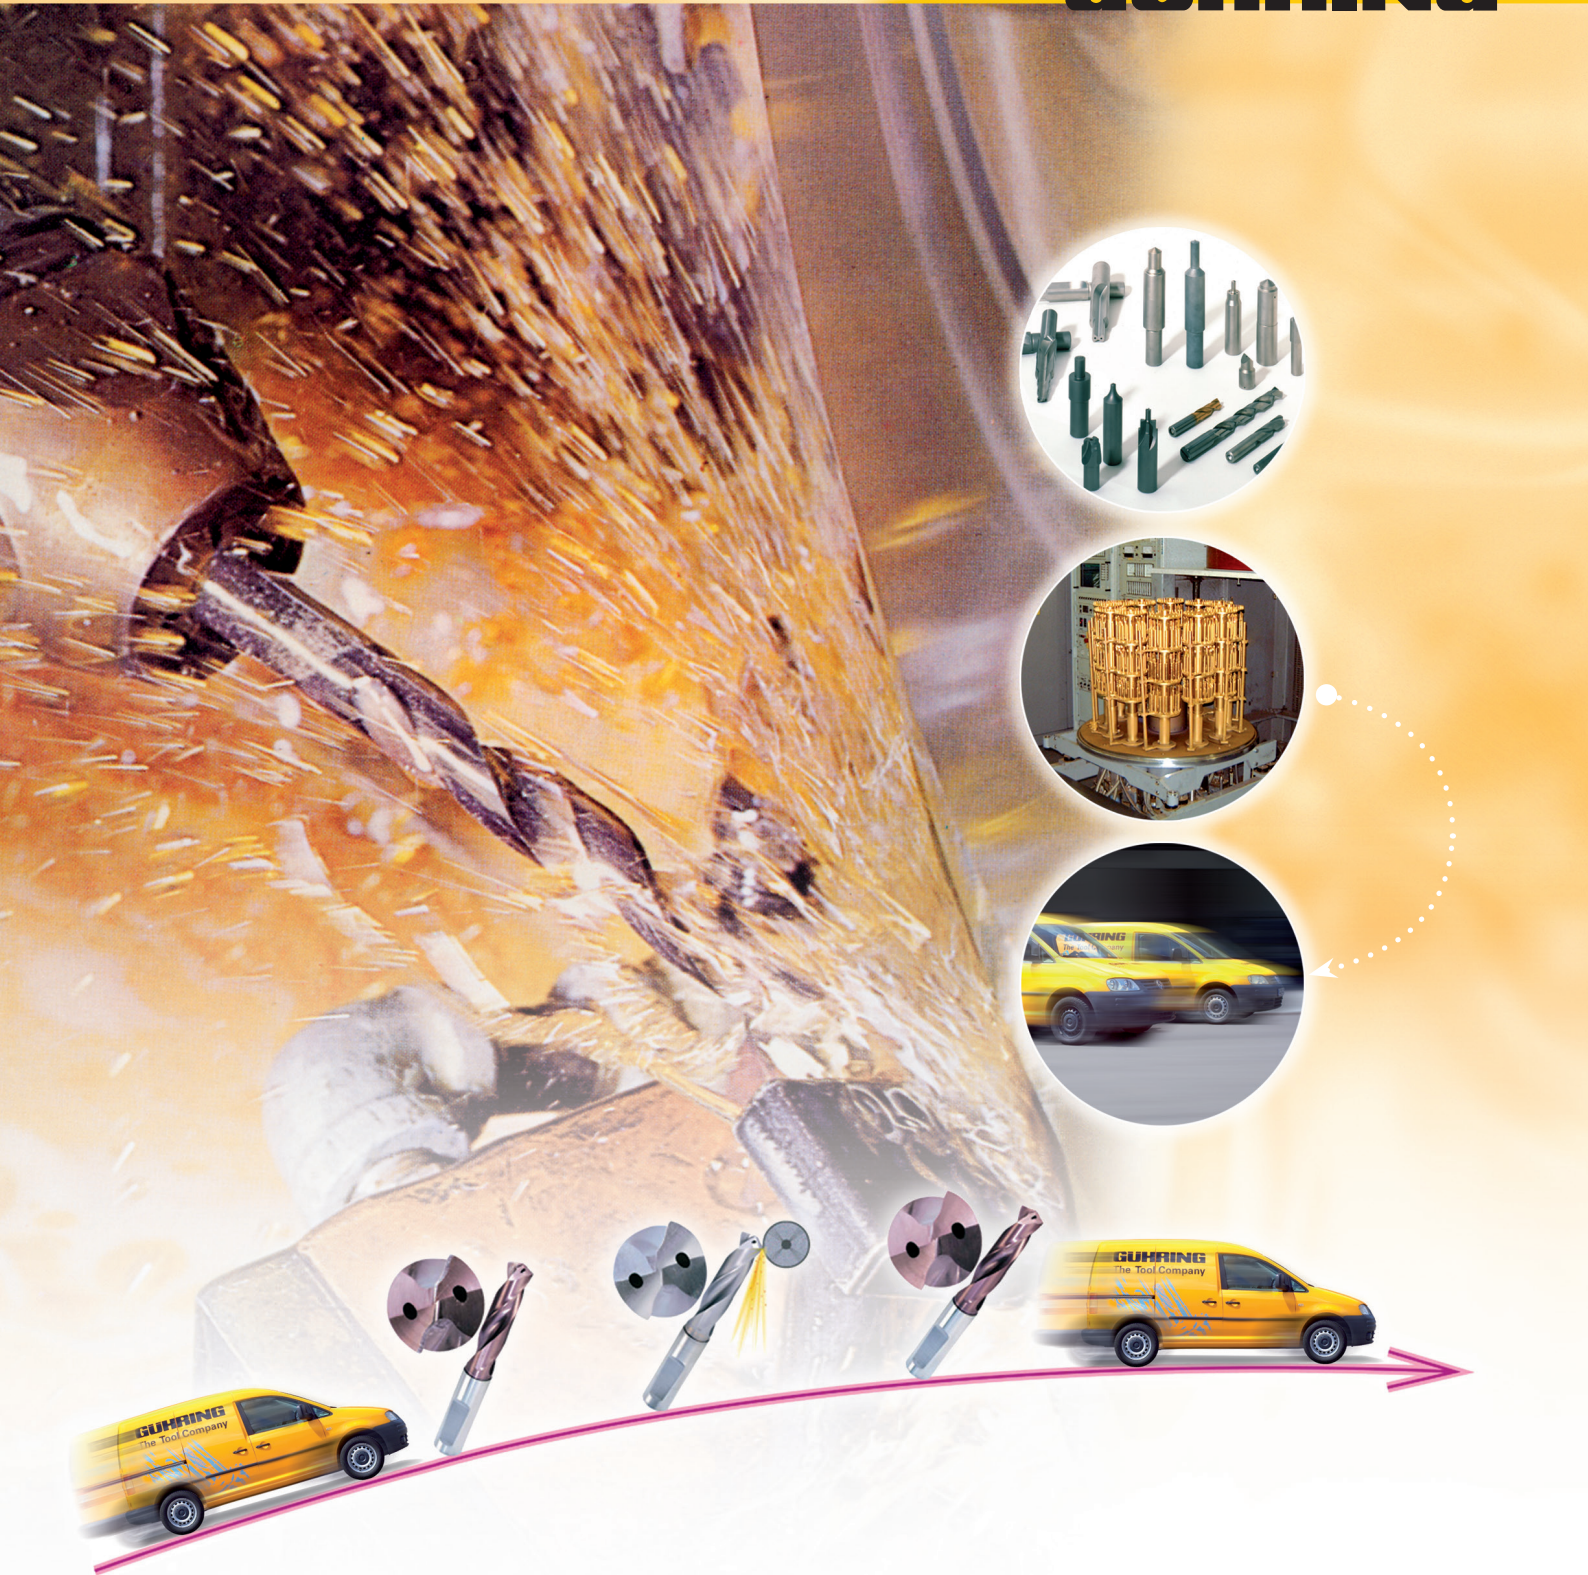

RE-GRINDING & RE-COATING


Guhring thinks big in all service matters. A comprehensive service is a matter of course even post tool sale. One area of our service program is the re-grinding and re-coating of tools – not only Guhring tools – to original geometries and original coatings so the efficiency of your tools is retained indefinitely.



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability						
mm	inch	l1 mm	l2 mm	204	217	218	219	220	221	501
0.400	1/64	30.00	10.00	●			●			
0.440		30.00	10.00	●						
0.450		30.00	10.00	●				○	○	
0.470		30.00	10.00	●				○		
0.500		32.00	12.00	●		○	●			
0.520		32.00	12.00	●		●	○			
0.550		35.00	15.00	●		●				
0.570		35.00	15.00	●		●				
0.600		35.00	15.00	●		●	●		●	
0.620		38.00	18.00	●						
0.650		38.00	18.00	●		●	●		○	
0.700		42.00	21.00	●		●	●	○		
0.730		42.00	21.00	●						
0.740		42.00	21.00	●			●			
0.750		42.00	21.00	●		●	●			
0.760		46.00	25.00	●						
0.790	1/32	46.00	25.00	●						
0.800		46.00	25.00	●		●	●			
0.820		46.00	25.00	●		●				
0.840		46.00	25.00	●		●				
0.850		46.00	25.00	●		●	●			
0.900		51.00	29.00	●		●	●	○	○	
0.910		51.00	29.00	●		●				
0.920		51.00	29.00	●		●				
0.950		51.00	29.00	●		●	●	○		
0.960		56.00	33.00	●						
0.970		56.00	33.00	●		○	○			
0.980		56.00	33.00	●			●			
1.000		56.00	33.00	●		●	●			●
1.020		56.00	33.00	○						●
1.030		56.00	33.00							○
1.040		56.00	33.00							●
1.050		56.00	33.00	●		●	●			●
1.070		60.00	37.00							●
1.080		60.00	37.00	●					●	
1.090		60.00	37.00	○						○
1.100		60.00	37.00	●		●	●	○	●	●
1.120		60.00	37.00	●						
1.130		60.00	37.00	○						

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability

		●			●				
		●			●				
		○			●				
		●			●				
		●			●				
		●			●				
		●			●				
		○			●				
					○				
	●	●	●	●	●	●	●	●	●
	●				○	●			
	●				●				
	○				○	●			
	●		●		●	●			
	●	●	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
1.150		60.00	37.00	●	●	●	○	○		●
1.180		60.00	37.00	●			○			●
1.190	3/64	65.00	41.00	●			○			●
1.200		65.00	41.00	●	●	●	●	●	●	●
1.220		65.00	41.00				●			
1.240		65.00	41.00						○	
1.250		65.00	41.00	●	●	●	●	○		●
1.300		65.00	41.00	●	●	●	●		●	●
1.320		65.00	41.00	●					○	●
1.350		70.00	45.00	●	●	●	●			
1.370		70.00	45.00				○		●	
1.400		70.00	45.00	●			●	○	●	●
1.430		70.00	45.00				○			
1.440		70.00	45.00	●			○			
1.450		70.00	45.00	●				○		●
1.470		70.00	45.00							●
1.480		70.00	45.00							○
1.490		70.00	45.00	●						
1.500		70.00	45.00	●	●	●	●	●	●	●
1.510		76.00	50.00	○			●	●	●	●
1.520		76.00	50.00				●			
1.550		76.00	50.00	●	●	●	●		○	●
1.560		76.00	50.00			○				
1.570		76.00	50.00			●				
1.580		76.00	50.00			○				
1.590	1/16	76.00	50.00	●						●
1.600		76.00	50.00	●	●	●	●	●		●
1.610		76.00	50.00	●			○			●
1.630		76.00	50.00					○		
1.650		76.00	50.00	●	●	●	●			
1.660		76.00	50.00					○		
1.670		76.00	50.00							
1.680		76.00	50.00							
1.700		76.00	50.00	●	●	●	●	●	○	●
1.730		80.00	53.00					○		
1.750		80.00	53.00	●	●	●	●			●
1.760		80.00	53.00				○			
1.770		80.00	53.00				○			
1.780		80.00	53.00	●			●			●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability									
	○	○	●		●				
	●		○		○	●			
	●	●	●	●	●	●	●	●	●
	●	○	●	●	●	●	●	●	●
	○	●	●	●	●	●	●	●	●
	●	●			●			●	
●	●	●	●	●	●	●	●	●	●
	●	●			●	●			
●	●	●	●	●	●	●	●	●	●
	●	●	●		●	●		○	
	●	●	●		●			●	
○	●	●	●		●	●		●	●
	●	●	●		●	●		●	
	●				●	●			


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133



d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
1.800		80.00	53.00	●	●	●	○	○	●	●
1.820		80.00	53.00	●	●	●	○	○	●	●
1.850		80.00	53.00	●	●	●	○	○	●	●
1.900		80.00	53.00	●	●	●	●	●	●	●
1.930		85.00	56.00	●	●	●	●	●	●	●
1.950		85.00	56.00	●	●	●	●	●	●	●
1.970		85.00	56.00	●	●	●	○	○	●	●
1.980	5/64	85.00	56.00	●	●	●	○	○	●	●
1.990	5/64	85.00	56.00	●	●	●	○	○	●	●
2.000		85.00	56.00	●	●	●	●	●	●	●
2.020		85.00	56.00	●	●	●	○	○	●	●
2.030		85.00	56.00	●	●	●	○	○	●	●
2.040		85.00	56.00	●	●	●	○	○	●	●
2.050		85.00	56.00	●	●	●	○	○	●	●
2.060		85.00	56.00	○	●	●	○	○	●	●
2.070		85.00	56.00	●	●	●	○	○	●	●
2.080		85.00	56.00	●	●	●	○	○	●	●
2.100		85.00	56.00	●	●	●	○	○	●	●
2.150		90.00	59.00	●	●	●	○	○	●	●
2.160		90.00	59.00	●	●	●	○	○	●	●
2.180		90.00	59.00	●	●	○	○	○	●	●
2.200		90.00	59.00	●	●	●	○	○	●	●
2.210		90.00	59.00	●	●	●	○	○	●	●
2.220		90.00	59.00	●	●	●	○	○	●	●
2.250		90.00	59.00	●	●	●	○	○	●	●
2.260		90.00	59.00	●	●	●	○	○	●	●
2.270		90.00	59.00	●	●	●	○	○	●	●
2.300		90.00	59.00	●	●	●	○	○	●	●
2.350		90.00	59.00	●	●	○	●	●	○	●
2.370		95.00	62.00	●	●	○	●	●	○	●
2.380	3/32	95.00	62.00	●	●	○	●	●	○	●
2.400	3/32	95.00	62.00	●	●	○	●	●	○	●
2.420	3/32	95.00	62.00	○	●	○	●	●	○	●
2.430	3/32	95.00	62.00	●	●	○	○	○	●	●
2.440	3/32	95.00	62.00	●	●	○	○	○	●	●
2.450	3/32	95.00	62.00	●	●	○	○	○	●	●
2.480	3/32	95.00	62.00	●	●	○	○	○	●	●
2.490	3/32	95.00	62.00	●	●	○	○	○	●	●
2.500	3/32	95.00	62.00	●	●	○	○	○	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135

Straight shank twist drills



Availability									
●	●	●	●	●	●	●	●	●	●
○	●	●	●	●	○	●	○	○	●
	●	●	●	●	○	●	●	●	●
	●	○	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
	●	●	●	●	○	●	●	●	●
	○	●	●	●	●	●	●	●	●
	●	●	○	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
	●	●	○	●	○	●	●	●	●
○	●	●	●	●	●	●	●	●	●
○	●	○	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	○	●
●	●	●	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
2.520		95.00	62.00							●
2.530		95.00	62.00	●						●
2.550		95.00	62.00	●		●	●			●
2.580		95.00	62.00	●						●
2.600		95.00	62.00	●		●	●			●
2.620		95.00	62.00	○			○			●
2.640		95.00	62.00	○						●
2.650		95.00	62.00	●		●	●			○
2.700		100.00	66.00	●		●	●	○	●	●
2.710		100.00	66.00	○			○			●
2.720		100.00	66.00				●			●
2.750		100.00	66.00	●		●	●	○		●
2.780	7/64	100.00	66.00	●						●
2.790	7/64	100.00	66.00	●						○
2.800	7/64	100.00	66.00	●		●	●		○	●
2.820		100.00	66.00	○						●
2.830		100.00	66.00			○				●
2.850		100.00	66.00	●			●		○	●
2.870		100.00	66.00	●		●				●
2.880		100.00	66.00				○			●
2.900		100.00	66.00	●		●	●	●	○	●
2.920		100.00	66.00			●				●
2.940		100.00	66.00			●				●
2.950		100.00	66.00	○	●	●	○	○	○	●
2.970		100.00	66.00		●					●
2.980		100.00	66.00		●					●
2.990		100.00	66.00							●
3.000		100.00	66.00	●	●	●	●	●	●	●
3.020		106.00	69.00			●		○		●
3.030		106.00	69.00		●					●
3.050		106.00	69.00		●	●	●	○		●
3.060		106.00	69.00			○				●
3.070		106.00	69.00					○		●
3.100		106.00	69.00	●	●	●	●	○		●
3.120		106.00	69.00							●
3.150		106.00	69.00		●	●	○		○	●
3.170	1/8	106.00	69.00	○	●		●		○	●
3.180	1/8	106.00	69.00			●	○			●
3.200	1/8	106.00	69.00	●	●	●	●	●	○	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability

	●	○	●			●			
	●		●		●	●	●	●	●
	●		●		●	●	●	●	●
	●	○	●		●	●	●	●	●
	●	●	●		●	●	●	●	○
●	●	●	●		●	●	●	●	○
	○		●			●			
	○	○	●			●			
	●	○	●	●	●	●	●	●	●
	○	●	●			●		●	
●	●	●	●	●	●	●	●	●	●
		●							
○	●	●	●		●	●		●	
	●	●	●	●	●	●	●	●	●
	●	●	●		●	●		●	
●	●	●	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133



d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
3.250		106.00	69.00							
3.260		106.00	69.00							
3.270		106.00	69.00							
3.280		106.00	69.00							
3.300		106.00	69.00							
3.350		106.00	69.00							
3.400		112.00	73.00							
3.420		112.00	73.00							
3.440		112.00	73.00							
3.450		112.00	73.00							
3.500		112.00	73.00							
3.510		112.00	73.00							
3.550		112.00	73.00							
3.570	9/64	112.00	73.00							
3.600		112.00	73.00							
3.650		112.00	73.00							
3.660		112.00	73.00							
3.700		112.00	73.00							
3.730		112.00	73.00							
3.750		112.00	73.00							
3.800		119.00	78.00							
3.830		119.00	78.00							
3.850		119.00	78.00							
3.860		119.00	78.00							
3.870		119.00	78.00							
3.900		119.00	78.00							
3.910		119.00	78.00							
3.920		119.00	78.00							
3.950		119.00	78.00							
3.970	5/32	119.00	78.00							
3.990		119.00	78.00							
4.000		119.00	78.00							
4.030		119.00	78.00							
4.040		119.00	78.00							
4.050		119.00	78.00							
4.090		119.00	78.00							
4.100		119.00	78.00							
4.130		119.00	78.00							
4.150		119.00	78.00							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSC0				
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability									
	●	●	●		●	●		●	●
	●	○	○						
○	●	●	●	●	●	●	●	○	●
○	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	○	●		○	●		●	●
	●	●	●	●	●	●	○	●	●
○	●	○	○	○	●	○	●	●	●
○	●	○	●		○	●		●	○
●	●	●	●	●	●	●	●	●	●
	●	●	●		○	●		●	
	●	●	○		●	●	●	●	●
	○		●		●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
4.200		119.00	78.00	●	●	●	●		●	●
4.220		119.00	78.00		●					●
4.250		119.00	78.00	○	●			○		●
4.300		126.00	82.00	●	●	●	●	○		●
4.350		126.00	82.00		○					●
4.370	11/64	126.00	82.00		○					●
4.390		126.00	82.00		○					●
4.400		126.00	82.00	●	●	●	●		○	
4.450		126.00	82.00		○					
4.500		126.00	82.00	●	●	●	●	●	○	●
4.550		126.00	82.00		●					
4.570		126.00	82.00		○					●
4.600		126.00	82.00	○	●	●	●	○		●
4.620		126.00	82.00		●					●
4.650		126.00	82.00		●					
4.700		126.00	82.00		●	●	●			●
4.750		126.00	82.00		●					●
4.760	3/16	132.00	87.00	○	●	●				●
4.780		132.00	87.00		●			○		
4.800		132.00	87.00	●	●	●	●	○		●
4.830		132.00	87.00				○			
4.850		132.00	87.00		○					●
4.870		132.00	87.00				○			
4.900		132.00	87.00		●	●	●		●	●
4.910		132.00	87.00							
4.920		132.00	87.00		○					●
4.950		132.00	87.00		●		○	○		
4.980		132.00	87.00		●					○
5.000		132.00	87.00	●	●	●	●	●	●	●
5.030		132.00	87.00		●					
5.050		132.00	87.00		●				○	●
5.060		132.00	87.00		●					●
5.080		132.00	87.00	○						
5.100		132.00	87.00	●	●	●	●	○	○	●
5.110		132.00	87.00		○					●
5.150		132.00	87.00		○					
5.160	13/64	132.00	87.00		●					○
5.180		132.00	87.00		○					○
5.200		132.00	87.00	●	●	●	●	○		●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability									
●	○	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●
	●	○	●	●	○	●	●	●	●
○	●	●	●	●	○	●	●	●	●
●	●	○	●	●	○	●	●	●	●
○	●	○	●	●	●	●	●	●	●
	●	○	●	●	●	●	●	●	●
○	●	○	●	●	●	●	●	●	●
●	●	○	●	●	○	●	●	●	●
○	●	○	●	●	●	●	●	○	●
●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●
	●	○	●	●	●	●	●	●	●
○	●	○	●	●	○	●	●	●	○
○	●	●	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability						
mm	inch	l1	l2	204	217	218	219	220	221	501
5.220		132.00	87.00	●	●					
5.250		132.00	87.00	●	●					
5.300		132.00	87.00	●	●	●	●			●
5.310		139.00	91.00		○					○
5.350		139.00	91.00		○					
5.400		139.00	91.00		●	●	●		○	●
5.410		139.00	91.00		○					○
5.430		139.00	91.00				○			
5.450		139.00	91.00		○	○				
5.500		139.00	91.00	●	●	●	●	○		●
5.550		139.00	91.00		○					
5.560	7/32	139.00	91.00		●	●	●			●
5.600		139.00	91.00	●	●	●		○	○	●
5.610		139.00	91.00		●					○
5.650		139.00	91.00		○		○			○
5.700		139.00	91.00		●		●	○		●
5.750		139.00	91.00		●					
5.790		139.00	91.00		○					○
5.800		139.00	91.00	●	●	●				●
5.850		139.00	91.00	○	●					●
5.900		139.00	91.00	○	●	●	●		○	●
5.940		139.00	91.00							○
5.950	15/64	139.00	91.00		●	○				●
5.980		139.00	91.00				○			
6.000		139.00	91.00	●	●	●	●	●	●	●
6.030		148.00	97.00							●
6.040		148.00	97.00							●
6.050		148.00	97.00					○		
6.060		148.00	97.00		○					
6.100		148.00	97.00	●	●	●	●	○		
6.150		148.00	97.00							●
6.200		148.00	97.00	●	●	●				●
6.250		148.00	97.00		●		○			○
6.300		148.00	97.00	●	●	●	●	●		●
6.350	1/4	148.00	97.00	●	●	●				●
6.400		148.00	97.00	●	●		●	○		●
6.420		148.00	97.00			○				
6.500		148.00	97.00	●	●	●	●	○		●
6.530		148.00	97.00							●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability									
●	●	●	●	●	●	●	●	●	●
○	●	○	●	○	●	●	○	●	○
●	●	○	●	●	●	●	●	●	●
○	●	○	●	●	○	●	●	●	○
○	●	●	●	●	●	●	●	●	●
○	●	○	●	●	●	●	●	●	●
○	●	●	●	●	●	●	●	●	●
○	●	●	●	●	●	○	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	○	●	●	●	●	●	●
●	●	●	●	○	●	●	●	●	●
●	●	●	●	●	●	●	●	●	○
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills











Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133



d1				Availability						
mm	inch	l1 mm	l2 mm	204	217	218	219	220	221	501
6.600		148.00	97.00	●	●	●	●	●		●
6.630		148.00	97.00							●
6.700		148.00	97.00	●	●	●	●			●
6.750	17/64	156.00	102.00	○	●					●
6.760		156.00	102.00							
6.800		156.00	102.00	●	●	●	●	●	○	●
6.900		156.00	102.00	●	●	○	●			●
6.910		156.00	102.00							
7.000		156.00	102.00	●	●	●	●			●
7.030		156.00	102.00							
7.040		156.00	102.00							○
7.100		156.00	102.00		●		○			●
7.140	9/32	156.00	102.00		●					●
7.200		156.00	102.00		●	●		○		○
7.250		156.00	102.00		○					
7.300		156.00	102.00		●		●			●
7.350		156.00	102.00			○				
7.370		156.00	102.00							○
7.400		156.00	102.00	○	●		●			
7.450		156.00	102.00				○			
7.490		156.00	102.00							○
7.500		156.00	102.00	●	●	●	●	○		●
7.540	19/64	165.00	109.00		●		○			●
7.550		165.00	109.00				●			
7.600		165.00	109.00	○	○					○
7.670		165.00	109.00				○			○
7.700		165.00	109.00	○	●		○			
7.750		165.00	109.00		●					
7.800		165.00	109.00	○	●			○		
7.850		165.00	109.00				●			
7.900		165.00	109.00		●		●			○
7.940	5/16	165.00	109.00		●					●
7.950		165.00	109.00				○			
8.000		165.00	109.00	●	●	●	●	●	○	●
8.025		165.00	109.00							○
8.030		165.00	109.00							●
8.050		165.00	109.00							
8.100		165.00	109.00	●	●			○		●
8.200		165.00	109.00	○	●	●	●			●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135

Straight shank twist drills



Availability									
●	●	●	●	●	○	●	●	●	●
●	●	○	●	●	○	●	●	●	●
●	●	●	○	●	●	●	●	●	●
○	○	●	●	●	●	●	●	●	●
●	●	●	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	●	○	○	○


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability							
mm		inch	mm								
mm	inch		mm	204	217	218	219	220	221	501	
8.250			165.00	○	●			○			
8.300			165.00		●		○				
8.330	21/64		165.00		●					●	
8.400			165.00	○	●			○		○	
8.430			165.00		●					●	
8.450			165.00	○							
8.500			165.00	●	●		●			●	
8.550			175.00				○				
8.600			175.00	○	●		○			○	
8.610			175.00							●	
8.700			175.00		●	●	●			●	
8.730	11/32		175.00		●					●	
8.750			175.00	○	●	●	○			○	
8.800			175.00	●	●		●	○			
8.840			175.00								
8.900			175.00	●	●		○			●	
9.000			175.00	●	●	●	●	○	○	○	
9.090			175.00							○	
9.100			175.00		●		○			●	
9.130	23/64		175.00		●					●	
9.200			175.00		●					●	
9.300			175.00	○	●					●	
9.340			175.00							○	
9.350			175.00		●					○	
9.400			175.00	○	●		●			○	
9.500			175.00		●	●	●			●	
9.520	3/8		184.00		●			○		●	
9.580			184.00							●	
9.600			184.00		●					●	
9.700			184.00	○	●	○	○	○			
9.750			184.00		●					●	
9.800			184.00	●	●		●	○		●	
9.900			184.00	○	●	●	○	○			
9.920	25/64		184.00		●					●	
10.000			184.00	●	●	●	●	●		●	
10.080			184.00							●	
10.100			184.00		●			○		●	
10.200			184.00	●	●					●	
10.250			184.00		●					●	

○ bright ◐ steam tempered ◑ nitrided lands ● nitrided ● golden brown A TiAlN a TiAlN nanoA A TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSC0				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability									
●	●	○	●		○	●	○	●	
	●	●	●		●	●		●	
●	●	●	●		●	●	●	●	●
	●	●	○			●	●	●	
	●	●	●		○	●		○	○
	●	●	●		●	●	●		
●	●	○	○	●	●	●	○	●	●
	●	●	●		○	●	○		○
	○	○	●		●	●			●
	●	○	○		○	●	●	●	●
	●	●	●		●	●	○	○	
○	●	●	○		○	●		●	
	●	○	●	●	○	●	●	●	●
	●	●	○		●	●		●	●


 TiCN
  Carbo
  Cristall
  FIRE/nanoFIRE
  AlCrN
  TiN
  TiN+
  MolyGlide
  Signum



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133













d1				Availability							
mm	inch	l1	l2								
10.260		184.00	121.00								
10.300		184.00	121.00	○	●		○				○
10.320	13/32	184.00	121.00		●						○
10.400		184.00	121.00	○	●						●
10.490		184.00	121.00		●						●
10.500		184.00	121.00	●	●			●			●
10.600		184.00	121.00		●						○
10.700		195.00	128.00		●		○				○
10.720	27/64	195.00	128.00		●						○
10.750		195.00	128.00		●		○				
10.800		195.00	128.00		●						○
10.900		195.00	128.00	○	●						
11.000		195.00	128.00		●		●	○			●
11.100		195.00	128.00		●						●
11.110	7/16	195.00	128.00		●						●
11.200		195.00	128.00		●						○
11.250		195.00	128.00		●		○				
11.300		195.00	128.00		●			○			
11.400		195.00	128.00		●			○			○
11.500		195.00	128.00		●				○		●
11.510	29/64	195.00	128.00		●						○
11.600		195.00	128.00	●	●						
11.700		195.00	128.00		●						
11.750		195.00	128.00		●						○
11.800		195.00	128.00		●						●
11.900		205.00	134.00		●			○			○
11.910	15/32	205.00	134.00		●						●
12.000		205.00	134.00	●	●		●	○			●
12.100		205.00	134.00		●		○				
12.150		205.00	134.00		●						
12.200		205.00	134.00		●			○			●
12.300	31/64	205.00	134.00	○	●				○		●
12.500		205.00	134.00		●			○			●
12.600		205.00	134.00		●						
12.700	1/2	205.00	134.00		●						●
12.800		205.00	134.00		●				○		
13.000		205.00	134.00	○	●			○			●
13.100	33/64	205.00	134.00		●		○				●
13.200		205.00	134.00		●						

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown A TiAIN a TiAIN nanoA A TiAIN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135



Availability

○	●	○	●		●				
	●		●		●	●		●	
	○								
	●		●		●				
	○	○			○	○			
●	○	○	●	○	●	○	●	●	●
	●	●	●		●	●		●	
	○		●						
○	○		○		○				●
○		●	●		●				
	●								
	○		●						
	○	○	○		●				
○	●	●	●		●	●	●	●	●
	○		●						
	●		●		●				
	●	●	●		●				
○	●	●	●		●	●		●	


C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Long series twist drills

Straight shank twist drills











Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133



d1				Availability						
mm	inch	l1 mm	l2 mm	204	217	218	219	220	221	501
13.490	17/32	214.00	140.00							
13.500		214.00	140.00	●			●	○		●
13.700		214.00	140.00				○			
13.750		214.00	140.00			○	●			
13.800		214.00	140.00	●						
13.890	35/64	214.00	140.00	●						●
13.900		214.00	140.00							
14.000		214.00	140.00	●		○	○			●
14.100		220.00	144.00			●				
14.200		220.00	144.00	●						
14.250		220.00	144.00	●						
14.290	9/16	220.00	144.00	●						
14.400		220.00	144.00							
14.490		220.00	144.00	○						
14.500		220.00	144.00	●		○	●			
14.600		220.00	144.00							
14.680	37/64	220.00	144.00	●						
14.700		220.00	144.00							
14.750		220.00	144.00					○		
14.800		220.00	144.00							
14.900		220.00	144.00	●						
15.000		220.00	144.00	●		○	●		○	
15.080	19/32	227.00	149.00	●						
15.200		227.00	149.00	●						
15.250		227.00	149.00	●						
15.400		227.00	149.00	○						
15.480	39/64	227.00	149.00	●						
15.500		227.00	149.00	●			●			
15.600		227.00	149.00	○						
15.800		227.00	149.00							
15.870	5/8	227.00	149.00	●						
16.000		227.00	149.00	●		●				
16.270	41/64	235.00	154.00	●						
16.500		235.00	154.00	●						
16.670	21/32	235.00	154.00	●						
16.750		235.00	154.00							
17.000		235.00	154.00	●			●			
17.070	43/64	241.00	158.00	●						
17.460	11/16	241.00	158.00	●						

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
									
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135

Straight shank twist drills



Availability


	●	●							●
	●	●							●
	○								●
	●	●							○
	○	●	●						○
	●								●
		●							○
									○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○
		●							○
		○							○
		●							○



Long series twist drills

Straight shank twist drills

Guhring no.	204	217	218	219	220	221	501
Standard	DIN 340						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	H	GT50
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	left-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	134	134	138	138	136
Techn. data page	132	132	132	132	133	133	133



d1				Availability								
mm		inch	mm									
17.500			241.00	158.00								
18.000			241.00	158.00								
18.250			247.00	162.00								
18.500			247.00	162.00								
18.650	47/64		247.00	162.00								
19.000			247.00	162.00								
19.450	49/64		254.00	166.00								
19.840	25/32		254.00	166.00								
20.000			254.00	166.00								
20.100			261.00	171.00								
20.400			261.00	171.00								
20.500			261.00	171.00								
20.640	13/16		261.00	171.00								
20.750			261.00	171.00								
21.000			261.00	171.00								
21.500			268.00	176.00								
22.000			268.00	176.00								
22.220	7/8		268.00	176.00								
23.300			275.00	180.00								
23.420	59/64		275.00	180.00								
23.810	15/16		282.00	185.00								
24.000			282.00	185.00								
24.750			282.00	185.00								
25.000	63/64		282.00	185.00								
25.250			290.00	190.00								
25.500			290.00	190.00								
26.190	1 1/32		290.00	190.00								
26.500			290.00	190.00								
26.990	1 1/16		298.00	195.00								
28.570	1 1/8		307.00	201.00								
29.000			307.00	201.00								
29.370	1 5/32		307.00	201.00								
29.500			307.00	201.00								
30.000			307.00	201.00								
30.160	1 3/16		316.00	207.00								
30.960	1 7/32		316.00	207.00								
31.000			316.00	207.00								
32.600			325.00	213.00								
36.510	1 7/16		345.00	225.00								

bright
 steam tempered

●
 nitrided lands
 nitrided
 golden brown











A
 TiAlN

a
 TiAlN nanoA

A
 TiAlN SuperA



Straight shank twist drills

506	535	667	668	2462	317	336	396	617	669
DIN 340									
HSS					HSCO				
 $\frac{+0}{2,36}$	 $\frac{+0}{2,36}$	 S	 S	 F	 $\frac{+0}{2,36}$	 $\frac{+0}{2,36}$	 F	 O	 S
GT 100	GT 100	N	GT 100	GT 100	N	GT 100	GT 100	Ti	Ti
left-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
h8	h8	h8	h8	h8	h8	h8	h8	h8	h8
138	136	133	137	137	134	136	137	134	139
133	133	134	134	134	134	134	135	135	135




Availability									
		●	○						
			○						
							●		
			○						



Straight shank twist drills

Gühring no.	706
Standard	Gühring std.
Tool material	Solid carbide
Surface	
Type	N
Cutting direction	right-hand
Tolerance	h7
Discount group	102
Techn. data page	135



d1		l1	l2
mm	inch		
0.500		38.00	8.50
0.600		38.00	9.50
0.650		38.00	10.50
0.700		38.00	10.50
0.750		38.00	12.50
0.800		38.00	12.50
0.850		38.00	14.50
0.900		38.00	14.50
1.000		38.00	17.00
1.050		38.00	17.00
1.100		38.00	17.00
1.400		38.00	17.00
1.450		38.00	17.00


Availability	

- bright
- steam tempered
- nitrided lands
- nitrided
- golden brown
- TiAIN
- TiAIN nanoA
- TiAIN SuperA



Straight shank twist drills

Guhring no.	235	502	524	670	618
Standard	DIN 1869				
Tool material	HSS				HSCO
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	137	136
Techn. data page	135	136	136	136	136




d1				Availability				
mm	inch	l1	l2					
1.600		115.00	75.00	●				
1.700		115.00	75.00	●				
1.800		120.00	80.00	●				
1.900		120.00	80.00	●				
1.930		125.00	85.00	○				
1.950		125.00	85.00	●	●			
1.980	5/64	125.00	85.00				○	
2.000		125.00	85.00	●	●	●	●	
2.050		125.00	85.00	●	●			
2.100		125.00	85.00	●	●	●	●	
2.200		135.00	90.00	●	●	●	●	
2.300		135.00	90.00	●	●		●	
2.350		135.00	90.00	○		●		
2.370		140.00	95.00		●			
2.380	3/32	140.00	95.00	●	●	●	●	
2.400		140.00	95.00	●	●	●	●	
2.450		140.00	95.00			○		
2.500		140.00	95.00	●	●	●	●	
2.550		140.00	95.00		●			
2.580		140.00	95.00		●			
2.600		140.00	95.00	●	●	●		
2.700		150.00	100.00	●	●			●
2.780	7/64	150.00	100.00	○	●	●	○	
2.800		150.00	100.00	●	●	●	●	
2.850		150.00	100.00		●			
2.870		150.00	100.00		●			
2.900		150.00	100.00	●	●	●	●	●
2.950		150.00	100.00		●	●	●	
3.000		150.00	100.00	●	●	●	●	●
3.030		155.00	105.00		●			
3.100		155.00	105.00	●	●	●	●	●
3.170	1/8	155.00	105.00	●	●	●	●	●
3.200		155.00	105.00	●	●	●	●	●
3.220		155.00	105.00				○	
3.250		155.00	105.00	●	●			
3.300		155.00	105.00	●	●	●	●	●
3.350		155.00	105.00			○		
3.400		165.00	115.00	●	●	●		●
3.450		165.00	115.00			●		



Extra length twist drills, series 1

Straight shank twist drills

Guhring no.	235	502	524	670	618
Standard	DIN 1869				
Tool material	HSS				HSCo
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	137	136
Techn. data page	135	136	136	136	136




d1				Availability				
mm	inch	l1 mm	l2 mm	235	502	524	670	618
3.500		165.00	115.00	●	●	○	●	●
3.530		165.00	115.00	●	●	○	●	●
3.570	9/64	165.00	115.00	●	●	○	○	○
3.600		165.00	115.00	●	●	○	●	●
3.650		165.00	115.00	○	●	●	●	●
3.700		165.00	115.00	●	●	●	●	●
3.750		165.00	115.00	○	●	●	●	○
3.800		175.00	120.00	●	●	●	●	●
3.860		175.00	120.00	●	●	●	●	●
3.900		175.00	120.00	●	●	●	●	●
3.970	5/32	175.00	120.00	●	●	●	●	●
4.000		175.00	120.00	●	●	●	●	●
4.100		175.00	120.00	●	●	●	●	●
4.200		175.00	120.00	●	●	●	●	●
4.250		175.00	120.00	●	●	●	●	●
4.300		185.00	125.00	●	●	●	●	●
4.370	11/64	185.00	125.00	○	●	○	●	●
4.400		185.00	125.00	●	●	●	●	●
4.500		185.00	125.00	●	●	●	●	●
4.570		185.00	125.00	●	●	●	●	●
4.600		185.00	125.00	○	●	●	●	●
4.700		185.00	125.00	●	●	●	●	●
4.760	3/16	195.00	135.00	●	●	●	●	●
4.800		195.00	135.00	●	●	●	●	●
4.850		195.00	135.00	●	●	●	●	○
4.900		195.00	135.00	●	●	○	●	●
5.000		195.00	135.00	●	●	●	●	●
5.100		195.00	135.00	●	●	●	●	●
5.110		195.00	135.00	●	●	●	●	●
5.160	13/64	195.00	135.00	●	●	●	●	●
5.200		195.00	135.00	●	●	●	●	●
5.300		195.00	135.00	●	●	○	●	●
5.340		205.00	140.00	○	●	●	●	●
5.400		205.00	140.00	●	●	○	●	●
5.500		205.00	140.00	●	●	●	●	●
5.560	7/32	205.00	140.00	●	●	●	●	●
5.600		205.00	140.00	●	●	○	●	●
5.700		205.00	140.00	●	●	●	●	●
5.750		205.00	140.00	●	●	●	●	●

○ bright ● steam tempered ○ nitrided lands ● nitrided ● golden brown Ⓐ TiAlN ⓐ TiAlN nanoA Ⓐ TiAlN SuperA



Straight shank twist drills

Guhring no.	235	502	524	670	618
Standard	DIN 1869				
Tool material	HSS				HSCO
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	137	136
Techn. data page	135	136	136	136	136




d1				Availability				
mm	inch	l1 mm	l2 mm	235	502	524	670	618
5.800		205.00	140.00	●	●	●	●	●
5.900		205.00	140.00	●	●	○	●	●
5.950	15/64	205.00	140.00	○	○	○	●	●
6.000		205.00	140.00	●	●	●	●	●
6.050		215.00	150.00	○	●	●	●	●
6.100		215.00	150.00	●	●	●	●	●
6.200		215.00	150.00	●	●	●	●	●
6.250		215.00	150.00	●	●	●	●	●
6.300		215.00	150.00	●	●	●	●	●
6.350	1/4	215.00	150.00	●	●	●	●	●
6.400		215.00	150.00	●	●	●	●	●
6.500		215.00	150.00	●	●	●	●	●
6.600		215.00	150.00	●	●	●	○	●
6.700		215.00	150.00	●	●	○	●	●
6.750	17/64	225.00	155.00	●	●	○	●	●
6.800		225.00	155.00	●	●	●	●	●
6.900		225.00	155.00	●	●	●	●	●
7.000		225.00	155.00	●	●	●	●	●
7.100		225.00	155.00	●	●	○	●	●
7.140	9/32	225.00	155.00	○	●	○	●	●
7.200		225.00	155.00	●	●	●	●	●
7.300		225.00	155.00	●	●	○	●	●
7.400		225.00	155.00	●	●	●	●	○
7.500		225.00	155.00	●	●	●	●	●
7.540	19/64	240.00	165.00	○	●	○	○	●
7.600		240.00	165.00	●	●	○	●	●
7.700		240.00	165.00	●	●	●	●	●
7.750		240.00	165.00	●	●	●	●	●
7.800		240.00	165.00	●	●	●	●	●
7.900		240.00	165.00	●	●	○	●	●
7.940	5/16	240.00	165.00	○	●	○	●	●
8.000		240.00	165.00	●	●	●	●	●
8.100		240.00	165.00	●	●	●	●	●
8.200		240.00	165.00	●	●	○	○	●
8.300		240.00	165.00	●	●	●	●	●
8.330	21/64	240.00	165.00	○	●	○	●	●
8.400		240.00	165.00	○	●	○	●	●
8.430		240.00	165.00	●	●	●	●	●
8.500		240.00	165.00	●	●	●	●	●



Extra length twist drills, series 1

Straight shank twist drills

Guhring no.	235	502	524	670	618
Standard	DIN 1869				
Tool material	HSS				HSCo
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	137	136
Techn. data page	135	136	136	136	136s




d1				Availability				
mm	inch	l1 mm	l2 mm	●	○	●	○	●
8.600		250.00	175.00					
8.700		250.00	175.00	●				●
8.730	11/32	250.00	175.00	●		○		●
8.800		250.00	175.00	●				●
8.900		250.00	175.00	●				●
9.000		250.00	175.00	●		○		●
9.130	23/64	250.00	175.00	○		●	○	○
9.200		250.00	175.00			●		
9.300		250.00	175.00			●		
9.400		250.00	175.00			●		
9.500		250.00	175.00	●				●
9.520	3/8	265.00	185.00	●		○		●
9.600		265.00	185.00	○		●	○	
9.700		265.00	185.00	●				●
9.800		265.00	185.00	●		○		
9.900		265.00	185.00	●		●		
9.920	25/64	265.00	185.00	○			○	
10.000		265.00	185.00			●	●	●
10.100		265.00	185.00	●				
10.200		265.00	185.00	●		●		
10.250		265.00	185.00	●				
10.320	13/32	265.00	185.00	●			○	
10.500		265.00	185.00	●		●		
10.600		265.00	185.00	●			○	
10.720	27/64	280.00	195.00			●		
10.900		280.00	195.00				○	
11.000		280.00	195.00	●		●	●	
11.110	7/16	280.00	195.00			●		
11.200		280.00	195.00			○		
11.500		280.00	195.00	●		●		
11.510	29/64	280.00	195.00	○		○		
11.750		280.00	195.00			●		
11.800		280.00	195.00	●		●		
11.900		295.00	205.00				○	
11.910	15/32	295.00	205.00			●	○	
12.000		295.00	205.00	●		●	●	
12.100		295.00	205.00	●				
12.250		295.00	205.00	●				
12.300	31/64	295.00	205.00	●				

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA

Straight shank twist drills

Guhring no.	236	503	528	671	619
Standard	DIN 1869				
Tool material	HSS				HSCo
Surface	●	● ^{0.3} _{2,26}	○	● ^S	●
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	139	138
Techn. data page	136	137	137	137	137




d1				Availability				
mm	inch	l1	l2	236	503	528	671	619
2.000		160.00	110.00		●			
2.200		170.00	115.00		●			
2.300		170.00	115.00		●			
2.500		180.00	120.00		●			
2.700		190.00	130.00	●			○	
2.800		190.00	130.00	●	●		●	
2.900		190.00	130.00	●				
3.000		190.00	130.00	●	●	●	●	●
3.030		200.00	135.00		●	○		
3.100		200.00	135.00	●	●	●	○	
3.170	1/8	200.00	135.00	●	●	●	●	●
3.200		200.00	135.00	●	●		●	●
3.300		200.00	135.00	●	●			●
3.400		210.00	145.00	●	●			●
3.500		210.00	145.00	●	●	●	●	●
3.570	9/64	210.00	145.00	○	●		○	●
3.600		210.00	145.00	●	●			
3.650		210.00	145.00			○		
3.700		210.00	145.00		●			
3.800		220.00	150.00	●	●	○		
3.900		220.00	150.00		●			
3.970	5/32	220.00	150.00	●	○		●	●
4.000		220.00	150.00	●	●	●	●	●
4.090		220.00	150.00		●		○	
4.100		220.00	150.00	●	●			●
4.200		220.00	150.00	●	●	●		●
4.300		235.00	160.00	●	●			
4.370		235.00	160.00	○	○		○	○
4.400		235.00	160.00		○		○	
4.500		235.00	160.00	●	●	●	●	●
4.600		235.00	160.00		●		●	●
4.760	3/16	245.00	170.00	●	●	○	●	●
4.800		245.00	170.00	●	●	●	○	●
4.900		245.00	170.00	●	●			●
5.000		245.00	170.00	●	●	●	●	●
5.100		245.00	170.00		●		●	
5.110		245.00	170.00			●		
5.160	13/64	245.00	170.00		●			
5.200		245.00	170.00	●	●			●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Guhring no.	236	503	528	671	619
Standard	DIN 1869				
Tool material	HSS				HSCo
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	139	138
Techn. data page	136	137	137	137	137

Straight shank twist drills




d1				Availability				
mm	inch	l1 mm	l2 mm	236	503	528	671	619
5.300		245.00	170.00				○	
5.400		260.00	180.00					
5.500		260.00	180.00	●	●	○	●	●
5.560	7/32	260.00	180.00	○	●		○	●
5.700		260.00	180.00		●			●
5.800		260.00	180.00	●	●	○		
5.900		260.00	180.00	●	●			
5.950	15/64	260.00	180.00	○	○			●
6.000		260.00	180.00	●	●	●	●	●
6.100		275.00	190.00		●			●
6.150		275.00	190.00		●			
6.200		275.00	190.00	●	●			●
6.350	1/4	275.00	190.00	●	●		●	●
6.400		275.00	190.00		●			
6.500		275.00	190.00	●	●	○	●	●
6.600		275.00	190.00		●			
6.700		275.00	190.00	●	●			
6.750	17/64	290.00	200.00		●		○	●
6.800		290.00	200.00	●	●		●	●
6.900		290.00	200.00		●			
7.000		290.00	200.00	●	●	●	●	●
7.140	9/32	290.00	200.00	○	●		○	●
7.200		290.00	200.00		●			
7.400		290.00	200.00		●			●
7.500		290.00	200.00	●	●	●	○	●
7.540	19/64	305.00	210.00	○	○			○
7.600		305.00	210.00		●	○		○
7.700		305.00	210.00		●			●
7.800		305.00	210.00	●	●			
7.940	5/16	305.00	210.00	●	●		●	●
8.000		305.00	210.00	●	●	●	●	●
8.100		305.00	210.00	●	●			
8.200		305.00	210.00		●			●
8.330	21/64	305.00	210.00		●			
8.500		305.00	210.00	●	●	●	●	●
8.600		320.00	220.00		●			
8.700		320.00	220.00	●	●			
8.730	11/32	320.00	220.00	●	●			●
8.800		320.00	220.00	●	●			



Extra length twist drills, series 2

Straight shank twist drills

Guhring no.	236	503	528	671	619
Standard	DIN 1869				
Tool material	HSS			HSCo	
Surface					
Type	N	GT 100	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8
Discount group	134	136	138	139	138
Techn. data page	136	137	137	137	137



d1		l1	l2
mm	inch	mm	mm

8.900		320.00	220.00
9.000		320.00	220.00
9.100		320.00	220.00
9.130	23/64	320.00	220.00
9.200		320.00	220.00
9.300		320.00	220.00
9.500		320.00	220.00
9.520	3/8	340.00	235.00
9.600		340.00	235.00
9.700		340.00	235.00
9.800		340.00	235.00
9.900		340.00	235.00
9.920	25/64	340.00	235.00
10.000		340.00	235.00
10.200		340.00	235.00
10.500		340.00	235.00
10.720	27/64	365.00	250.00
11.000		365.00	250.00
11.110	7/16	365.00	250.00
11.500		365.00	250.00
11.510	29/64	365.00	250.00
11.750		365.00	250.00
11.910	15/32	375.00	260.00
12.000		375.00	260.00
12.300	31/64	375.00	260.00
12.500		375.00	260.00
12.700	1/2	375.00	260.00
13.000		375.00	260.00

Availability				
--------------	--	--	--	--


bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAN
 TiAN nanoA
 TiAN SuperA



Straight shank twist drills

Guhring no.	237	504	529	571
Standard	DIN 1869			
Tool material	HSS			HSCO
Surface	●	◐	○	◐
Type	N	GT 100	GT50	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	138	136	138	136
Techn. data page	137	138	138	138

NEW



d1				Availability			
mm		inch		l1	l2		
mm	inch	mm	mm				
2.500		225.00	150.00				
3.000		240.00	160.00				
3.100		250.00	170.00				
3.170	1/8	250.00	170.00				
3.200		250.00	170.00				
3.300		250.00	170.00				
3.400		265.00	180.00				
3.500		265.00	180.00	●		○	●
3.570	9/64	265.00	180.00		○		
3.600		265.00	180.00		○		
3.700		265.00	180.00				
3.800		280.00	190.00	●		○	●
3.900		280.00	190.00	○			
3.970	5/32	280.00	190.00				
4.000		280.00	190.00	●		●	●
4.100		280.00	190.00			○	
4.200		280.00	190.00	●			●
4.300		295.00	200.00				
4.370	11/64	295.00	200.00		○		
4.400		295.00	200.00		○		
4.500		295.00	200.00	●		○	●
4.600		295.00	200.00				
4.760	3/16	315.00	210.00				
4.800		315.00	210.00			○	●
4.900		315.00	210.00				
5.000		315.00	210.00	●		●	●
5.100		315.00	210.00				
5.200		315.00	210.00	●			●
5.400		330.00	225.00		○		
5.500		330.00	225.00	●		○	●
5.560	7/32	330.00	225.00				
5.800		330.00	225.00	●			●
5.900		330.00	225.00	●			
5.950	15/64	330.00	225.00				
6.000		330.00	225.00	●		●	●
6.100		350.00	235.00	●			●
6.200		350.00	235.00	●			●
6.300		350.00	235.00				
6.350	1/4	350.00	235.00				

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum




Extra length twist drills, series 3

Straight shank twist drills

Guhring no.	237	504	529	571
Standard	DIN 1869			
Tool material	HSS			HSCO
Surface				
Type	N	GT 100	GT50	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	138	136	138	136
Techn. data page	137	138	138	138

NEW




d1				Availability			
mm	inch	l1 mm	l2 mm	237	504	529	571
6.400		350.00	235.00				
6.500		350.00	235.00				
6.600		350.00	235.00				
6.700		350.00	235.00				
6.750	17/64	370.00	250.00				
6.800		370.00	250.00				
7.000		370.00	250.00				
7.140	9/32	370.00	250.00				
7.200		370.00	250.00				
7.500		370.00	250.00				
7.540	19/64	390.00	265.00				
7.750		390.00	265.00				
7.800		390.00	265.00				
7.940	5/16	390.00	265.00				
8.000		390.00	265.00				
8.200		390.00	265.00				
8.330	21/64	390.00	265.00				
8.500		390.00	265.00				
8.600		410.00	280.00				
8.700		410.00	280.00				
8.730	11/32	410.00	280.00				
8.800		410.00	280.00				
8.900		410.00	280.00				
9.000		410.00	280.00				
9.100		410.00	280.00				
9.200		410.00	280.00				
9.500		410.00	280.00				
9.520	3/8	430.00	295.00				
9.530		430.00	295.00				
9.800		430.00	295.00				
9.920	25/64	430.00	295.00				
10.000		430.00	295.00				
10.300		430.00	295.00				
10.320	13/32	430.00	295.00				
10.500		430.00	295.00				
10.720	27/64	455.00	310.00				
11.000		455.00	310.00				
11.100		455.00	310.00				
11.110	7/16	455.00	310.00				

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Straight shank twist drills

Gühring no.	577	579
Standard	NAS 907	
Tool material	HSS	
Surface	○	● $\begin{matrix} >0 \\ 2,36 \end{matrix}$
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	139	139




d1				Availability	
mm	inch	l1 mm	l2 mm	577	579
1.500		153.00	23.00	●	●
1.590	1/16	153.00	26.00	●	○
1.650		153.00	26.00	●	
1.750		153.00	26.00	○	
1.780		153.00	26.00	●	●
1.900		153.00	26.00	●	
1.930		153.00	29.00	○	
1.980	5/64	153.00	29.00	○	○
1.990		153.00	29.00	○	
2.000		153.00	29.00	●	●
2.100		153.00	29.00	●	
2.300		153.00	32.50	●	
2.370		153.00	37.00	○	
2.380	3/32	153.00	37.00	●	●
2.400		153.00	37.00	●	●
2.490		153.00	37.00	●	●
2.500		153.00	37.00	●	●
2.530		153.00	37.00	●	●
2.580		153.00	37.00	●	○
2.640		153.00	37.00		○
2.710		153.00	42.00	○	○
2.780	7/64	153.00	42.00		○
2.790		153.00	42.00	○	○
2.820		153.00	42.00		○
2.870		153.00	42.00	○	○
2.950		153.00	42.00	○	○
3.000		153.00	42.00	●	●
3.050		153.00	42.00	○	●
3.170	1/8	153.00	42.00	●	●
3.200		153.00	42.00	●	○
3.260		153.00	42.00	●	●
3.450		154.00	49.00		○
3.500		154.00	49.00	●	○
3.570	9/64	154.00	49.00	○	○
3.600		154.00	49.00		○
3.660		154.00	49.00		○
3.700		154.00	49.00		●
3.730		154.00	49.00	○	
3.800		154.00	55.00	●	○



Aircraft extension drills, 6 inches long

Straight shank twist drills

Guhring no.	577	579
Standard	NAS 907	
Tool material	HSS	
Surface		
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	139	139




d1				Availability	
mm	inch	l1	l2	577	579
3.860		154.00	55.00	○	
3.910		154.00	55.00	○	
3.970	5/32	154.00	55.00	●	●
3.990		154.00	55.00	○	○
4.000		154.00	55.00	●	●
4.040		154.00	55.00	●	●
4.090		154.00	55.00	●	●
4.220		154.00	55.00	●	○
4.370	11/64	154.00	60.00		○
4.390		154.00	60.00	●	○
4.500		154.00	60.00	●	○
4.570		154.00	60.00	○	○
4.620		154.00	60.00		○
4.700		154.00	60.00	●	○
4.760	3/16	154.00	63.50	●	●
4.800		154.00	63.50	●	●
4.850		154.00	63.50	○	○
4.920		154.00	63.50	●	○
4.980		154.00	63.50	○	○
5.000		154.00	63.50	●	●
5.160	13/64	154.00	63.50	●	○
5.410		154.00	68.50		○
5.500		154.00	68.50	●	●
5.560	7/32	154.00	68.50	●	●
5.800		154.00	68.50	●	○
5.940		154.00	68.50	○	○
5.950	15/64	154.00	68.50	○	○
6.040		154.00	75.00	○	○
6.150		154.00	75.00	○	○
6.200		154.00	75.00	○	○
6.250		154.00	75.00	○	○
6.350	1/4	154.00	75.00	●	●
6.400		154.00	75.00	○	
6.450		154.00	75.00		●
6.530		154.00	75.00	●	○
6.750	17/64	155.00	80.00		○
6.800		155.00	80.00	○	
7.000		155.00	80.00	●	
7.700		155.00	90.00	○	

○ bright
○ steam tempered
● nitrided lands
● nitrided
● golden brown
Ⓐ TiAIN
ⓐ TiAIN nanoA
Ⓐ TiAIN SuperA



Straight shank twist drills

Gühring no.	577	579
Standard	NAS 907	
Tool material	HSS	
Surface	○	● $\begin{matrix} +0 \\ 2,36 \end{matrix}$
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	139	139



d1		l1	l2
mm	inch	mm	mm
7.940	5/16	155.00	90.00
8.000		155.00	90.00

Availability	
--------------	--






Aircraft extension drills, 12 inches long

Straight shank twist drills

Guhring no.	578	580
Standard	NAS 907	
Tool material	HSS	
Surface	○	● ⁺⁰ _{2,36}
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	139	139



d1				Availability	
mm	inch	l1 mm	l2 mm	578	580
1.500		306.00	23.00	●	●
1.590	1/16	306.00	26.00	●	○
1.780		306.00	26.00	○	○
1.850		306.00	26.00	●	
1.930		306.00	29.00	●	
1.980	5/64	306.00	29.00		○
1.990		306.00	29.00	○	
2.000		306.00	29.00	●	●
2.180		306.00	32.50	●	
2.260		306.00	32.50	●	
2.380	3/32	306.00	37.00	●	●
2.440		306.00	37.00	●	
2.490		306.00	37.00	○	●
2.500		306.00	37.00	●	●
2.530		306.00	37.00		○
2.580		306.00	37.00	●	○
2.640		306.00	37.00	○	
2.710		306.00	42.00		●
2.780	7/64	306.00	42.00		○
2.790		306.00	42.00	●	●
2.820		306.00	42.00	●	○
2.870		306.00	42.00		○
2.950		306.00	42.00		○
3.000		306.00	42.00	●	●
3.170	1/8	306.00	42.00	●	●
3.200		306.00	42.00	●	
3.260		306.00	42.00	●	○
3.450		308.00	49.00	○	○
3.500		308.00	49.00	●	●
3.570	9/64	308.00	49.00	○	
3.660		308.00	49.00	○	○
3.700		308.00	49.00	○	○
3.730		308.00	49.00		○
3.800		308.00	55.00	●	●
3.970	5/32	308.00	55.00	●	●
3.990		308.00	55.00		○
4.000		308.00	55.00	●	●
4.040		308.00	55.00	●	●
4.090		308.00	55.00	●	


○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAIN ● TiAIN nanoA ● TiAIN SuperA

Aircraft extension drills, 12 inches long



Straight shank twist drills

Guhring no.	578	580
Standard	NAS 907	
Tool material	HSS	
Surface	○	● ⁺⁰ / _{2,36}
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	139	139




d1				Availability	
mm	inch	l1 mm	l2 mm	578	580
4.220		308.00	55.00	●	
4.300		308.00	60.00		○
4.370	11/64	308.00	60.00	○	○
4.390		308.00	60.00	○	○
4.500		308.00	60.00	●	●
4.570		308.00	60.00	○	○
4.620		308.00	60.00	○	
4.700		308.00	60.00	○	○
4.760	3/16	308.00	63.50	●	●
4.800		308.00	63.50	●	●
4.850		308.00	63.50	○	○
4.920		308.00	63.50	●	○
4.980		308.00	63.50	○	○
5.000		308.00	63.50	●	●
5.060		308.00	63.50		●
5.110		308.00	63.50		○
5.160	13/64	308.00	63.50	●	●
5.500		308.00	68.50	●	
5.560	7/32	308.00	68.50		○
5.790		308.00	68.50	○	○
5.800		308.00	68.50	●	
5.940		308.00	68.50		○
5.950	15/64	308.00	68.50	●	●
6.000		308.00	68.50	●	●
6.040		308.00	75.00	○	○
6.150		308.00	75.00	○	○
6.250		308.00	75.00	○	○
6.350	1/4	308.00	75.00	●	●
6.530		308.00	75.00	●	○
7.000		310.00	80.00	●	
7.940	5/16	310.00	90.00		●
8.000		310.00	90.00	●	○



Taper pin drills

Straight shank twist drills

Guhring no.	531
Standard	DIN 1898
Tool material	HSS
Surface	
Type	N
Cutting direction	right-hand
Tolerance	
Discount group	138
Techn. data page	140

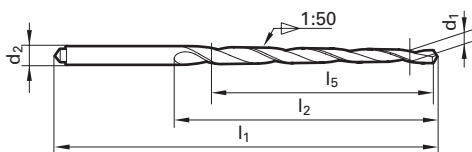


d1	d2	l1	l2	l5
mm	mm	mm	mm	mm
1.000	1.600	50.00	29.00	26.00
2.000	3.150	86.00	52.00	48.00
2.500	3.150	86.00	52.00	48.00
3.000	4.000	100.00	63.00	58.00
3.500	5.000	112.00	74.00	68.00
4.000	5.000	112.00	74.00	68.00
4.500	6.300	122.00	81.00	73.00
5.000	6.300	122.00	81.00	73.00
5.500	8.000	160.00	114.00	105.00
6.000	8.000	160.00	114.00	105.00
8.000	10.000	207.00	157.00	145.00
10.000	12.500	245.00	190.00	175.00
12.000	16.000	290.00	228.00	210.00

Availability	
●	
●	
●	
●	
●	
●	
●	
●	
○	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	
●	

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAlN
● a TiAlN nanoA
● A TiAlN SuperA



Guhring no.	703	704
Standard	DIN 8037	DIN 8038
Tool material	Carbide	
Surface	○	○
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	102	102
Techn. data page	140	140




d1	l1	l2	Availability	
mm	mm	mm	703	704
1.700	45.00	18.00	●	
1.900	45.00	18.00		●
2.200	45.00	18.00		●
2.600	50.00	20.00	●	
2.700	50.00	20.00	○	
2.900	50.00	20.00	●	
3.000	50.00	20.00	●	
3.100	56.00	25.00	●	●
3.200	56.00	25.00	●	●
3.250	56.00	25.00	●	
3.300	56.00	25.00	●	
3.500	56.00	25.00	●	●
3.700	56.00	25.00	●	○
3.800	56.00	25.00	●	
3.900	56.00	25.00	●	
4.000	56.00	25.00	●	
4.100	63.00	28.00	●	
4.200	63.00	28.00	●	●
4.300	63.00	28.00	●	
4.400	63.00	28.00	●	
4.500	63.00	28.00	●	●
4.800	63.00	28.00	●	
4.900	63.00	28.00	●	
5.000	63.00	28.00	●	●
5.100	71.00	32.00	●	
5.200	71.00	32.00	●	
5.300	71.00	32.00	●	
5.400	71.00	32.00	●	
5.500	71.00	32.00	●	●
5.800	71.00	32.00	●	
6.000	71.00	32.00	●	○
6.200	71.00	32.00	●	
6.300	71.00	32.00	●	
6.350	71.00	32.00	●	
6.400	71.00	32.00	●	
6.500	71.00	32.00	●	
6.700	80.00	40.00	●	
6.800	80.00	40.00	●	
7.000	80.00	40.00	●	



Carbide-tipped twist drill

Straight shank twist drills

Guhring no.	703	704
Standard	DIN 8037	DIN 8038
Tool material	Carbide	
Surface	○	○
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	102	102
Techn. data page	140	140




d1	l1	l2	Availability
mm	mm	mm	
7.100	80.00	40.00	●
7.200	80.00	40.00	○
7.500	80.00	40.00	●
7.800	80.00	40.00	●
8.000	80.00	40.00	●
8.200	90.00	50.00	●
8.400	90.00	50.00	●
8.500	90.00	50.00	●
8.800	90.00	50.00	●
9.000	90.00	50.00	●
9.500	90.00	50.00	●
9.700	100.00	56.00	●
9.800	100.00	56.00	●
10.000	100.00	56.00	●
10.200	100.00	56.00	●
10.400	100.00	56.00	●
10.500	100.00	56.00	●
11.000	100.00	56.00	●
11.500	112.00	63.00	●
12.000	112.00	63.00	●
12.500	112.00	63.00	●
12.700	112.00	63.00	●
13.000	112.00	63.00	●
13.500	125.00	71.00	●
14.000	125.00	71.00	●
14.500	125.00	71.00	●
15.000	125.00	71.00	●
15.500	140.00	80.00	●
16.000	140.00	80.00	●
16.500	140.00	80.00	●
17.000	140.00	80.00	●
17.500	160.00	90.00	●
18.000	160.00	90.00	●
19.000	160.00	90.00	●
19.500	160.00	90.00	●
20.000	160.00	90.00	●
21.000	160.00	90.00	●
22.000	160.00	90.00	●
23.500	170.00	100.00	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Straight shank twist drills

Guhring no.	703	704
Standard	DIN 8037	DIN 8038
Tool material	Carbide	
Surface	○	○
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	102	102
Techn. data page	140	140




d1	l1	l2
mm	mm	mm
24.000	170.00	100.00

Availability	
●	●



Straight shank twist
drills

Guhring no.	1149
Standard	Guhring std.
Tool material	Solid carbide
Surface	○
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	102
Techn. data page	140



d1		l1	l2
mm	inch		
2.500		43.00	14.00
3.200		49.00	18.00
3.570	9/64	52.00	20.00
4.000		55.00	22.00
4.760	3/16	62.00	26.00
5.000		62.00	26.00
6.000		66.00	28.00
8.000		79.00	37.00
10.000		89.00	43.00
12.000		102.00	51.00


Availability	
●	
○	
●	
●	
○	
●	
●	
●	
●	
●	

○ bright
 ● steam tempered
 ● nitrided lands
 ● nitrided
 ● golden brown
 ● TiAlN
 ● TiAlN nanoA
 ● TiAlN SuperA



Straight shank twist drills

Guhring no.	707
Standard	Guhring std.
Tool material	Carbide
Surface	○
Type	
Cutting direction	right-hand
Tolerance	h8
Discount group	102
Techn. data page	140



d1	d2	l1
mm	mm	mm

3.000	2.500	50.00
5.000	4.000	63.00
5.500	5.000	70.00
6.000	5.000	70.00
7.000	6.000	80.00
8.000	6.000	80.00
9.000	7.000	90.00
10.000	8.000	100.00
12.000	8.000	112.00


Availability	
--------------	--

○
○
○
○
●
●
○
●
○



Taper shank twist drills

Guhring no.	363	663
Standard	Guhring std.	
Tool material	HSCO	
Surface	●	●S
Type	GV 120	GV 120
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	134	139
Techn. data page	142	142



d1		MK	l1	l2
mm	inch			
20.000		3	212.00	91.00
20.500		3	216.00	95.00
20.900		3	216.00	95.00
21.000		3	216.00	95.00
21.030	53/64	3	216.00	95.00
21.500		3	219.00	98.00
22.000		3	219.00	98.00
22.220	7/8	3	219.00	98.00
23.000		3	222.00	101.00
23.020	29/32	3	222.00	101.00
24.000		3	225.00	104.00
24.500		3	225.00	104.00
25.000	63/64	3	225.00	104.00
26.000		4	256.00	107.00
26.500		4	256.00	107.00
27.000		4	259.00	110.00
27.500		4	259.00	110.00
28.000		4	259.00	110.00
29.000		4	263.00	114.00
29.370	1 5/32	4	263.00	114.00
30.000		4	263.00	114.00
31.000		4	266.00	117.00
32.000		4	269.00	120.00
32.500		4	269.00	120.00
33.000		4	269.00	120.00
37.000		4	276.00	127.00
38.000		5	317.00	130.00
43.000		5	323.00	136.00


Availability	
●	●
●	●
○	
●	●
○	
●	●
●	●
●	●
○	
●	
●	●
●	●
●	●
○	
●	●
○	
●	○
○	
●	
○	
○	

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Taper shank twist drills

Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143




d1		MK	l1	l2
mm	inch			
5.400		1	138.00	57.00
5.500		1	138.00	57.00
5.560	7/32	1	138.00	57.00
5.600		1	138.00	57.00
5.700		1	138.00	57.00
5.750		1	138.00	57.00
5.800		1	138.00	57.00
5.900		1	138.00	57.00
5.950	15/64	1	138.00	57.00
6.000		1	138.00	57.00
6.050		1	144.00	63.00
6.100		1	144.00	63.00
6.200		1	144.00	63.00
6.300		1	144.00	63.00
6.350	1/4	1	144.00	63.00
6.400		1	144.00	63.00
6.500		1	144.00	63.00
6.600		1	144.00	63.00
6.700		1	144.00	63.00
6.750	17/64	1	150.00	69.00
6.800		1	150.00	69.00
6.900		1	150.00	69.00
7.000		1	150.00	69.00
7.140	9/32	1	150.00	69.00
7.200		1	150.00	69.00
7.250		1	150.00	69.00
7.300		1	150.00	69.00
7.400		1	150.00	69.00
7.500		1	150.00	69.00
7.540	19/64	1	156.00	75.00
7.700		1	156.00	75.00
7.750		1	156.00	75.00
7.800		1	156.00	75.00
7.900		1	156.00	75.00
7.940	5/16	1	156.00	75.00
8.000		1	156.00	75.00
8.050		1	156.00	75.00
8.100		1	156.00	75.00
8.200		1	156.00	75.00

Availability						

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface	●	● $\frac{>\delta}{2,36}$	○	○	●	● $\frac{>\delta}{16,0}$	● $\frac{>\delta}{16,0}$
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143

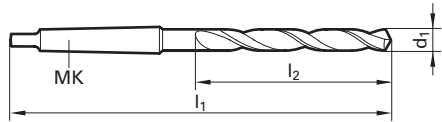


d1					Availability								
mm		inch	MK	l1	l2								
10.750			1	175.00	94.00								
10.800			1	175.00	94.00								
10.900			1	175.00	94.00								
11.000			1	175.00	94.00	●			○		○		
11.100			1	175.00	94.00								
11.110	7/16		1	175.00	94.00						○		●
11.200			1	175.00	94.00								
11.250			1	175.00	94.00								
11.300			1	175.00	94.00								
11.400			1	175.00	94.00								
11.500			1	175.00	94.00						○		
11.600			1	175.00	94.00								○
11.700			1	175.00	94.00								
11.750			1	175.00	94.00				○				
11.800			1	175.00	94.00								
11.900			1	182.00	101.00								
11.910	15/32		1	182.00	101.00	○							○
12.000			1	182.00	101.00				○		●		○
12.100			1	182.00	101.00								
12.200			1	182.00	101.00								
12.250			1	182.00	101.00	○							
12.300	31/64		1	182.00	101.00								
12.500			1	182.00	101.00	●					○		
12.550			1	182.00	101.00						○		
12.600			1	182.00	101.00				○				
12.700	1/2		1	182.00	101.00							○	○
12.750			1	182.00	101.00							○	
12.800			1	182.00	101.00				○				
12.850			1	182.00	101.00								
12.900			1	182.00	101.00				○				
13.000			1	182.00	101.00	●					○	○	○
13.100	33/64		1	182.00	101.00								
13.200			1	182.00	101.00						○		
13.250			1	189.00	108.00	○						○	
13.300			1	189.00	108.00								
13.490	17/32		1	189.00	108.00	○							○
13.500			1	189.00	108.00								○
13.600			1	189.00	108.00								
13.700			1	189.00	108.00								

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA




Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143



d1					MK	l1	l2	Availability							
mm	inch														
19.750				2	238.00	140.00									
19.800				2	238.00	140.00									
19.840	25/32			2	238.00	140.00									
20.000				2	238.00	140.00									
20.100				2	243.00	145.00									
20.200				2	243.00	145.00									
20.250				2	243.00	145.00									
20.300				2	243.00	145.00									
20.400				2	243.00	145.00									
20.500				2	243.00	145.00									
20.600				2	243.00	145.00									
20.640	13/16			2	243.00	145.00									
20.750				2	243.00	145.00									
21.000				2	243.00	145.00									
21.100				2	243.00	145.00									
21.200				2	243.00	145.00									
21.250				2	248.00	150.00									
21.430	27/32			2	248.00	150.00									
21.500				2	248.00	150.00									
21.750				2	248.00	150.00									
21.830	55/64			2	248.00	150.00									
22.000				2	248.00	150.00									
22.100				2	248.00	150.00									
22.200				2	248.00	150.00									
22.220	7/8			2	248.00	150.00									
22.250				2	248.00	150.00									
22.400				2	248.00	150.00									
22.500				2	253.00	155.00									
22.620	57/64			2	253.00	155.00									
22.750				2	253.00	155.00									
23.000				2	253.00	155.00									
23.020	29/32			2	253.00	155.00									
23.250				3	276.00	155.00									
23.300				3	276.00	155.00									
23.420	59/64			3	276.00	155.00									
23.500				3	276.00	155.00									
23.750				3	281.00	160.00									
23.810	15/16			3	281.00	160.00									
23.900				3	281.00	160.00									



Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143

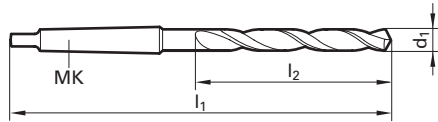

d1		MK	l1	l2
mm	inch			
24.000		3	281.00	160.00
24.100		3	281.00	160.00
24.210	61/64	3	281.00	160.00
24.250		3	281.00	160.00
24.300		3	281.00	160.00
24.500		3	281.00	160.00
24.610	31/32	3	281.00	160.00
24.750		3	281.00	160.00
25.000	63/64	3	281.00	160.00
25.100		3	286.00	165.00
25.200		3	286.00	165.00
25.250		3	286.00	165.00
25.400	1	3	286.00	165.00
25.500		3	286.00	165.00
25.750		3	286.00	165.00
25.800	1 1/64	3	286.00	165.00
26.000		3	286.00	165.00
26.190	1 1/32	3	286.00	165.00
26.250		3	286.00	165.00
26.500		3	286.00	165.00
26.590	1 3/64	3	291.00	170.00
26.750		3	291.00	170.00
26.990	1 1/16	3	291.00	170.00
27.000		3	291.00	170.00
27.200		3	291.00	170.00
27.250		3	291.00	170.00
27.500		3	291.00	170.00
27.750		3	291.00	170.00
27.780	1 3/32	3	291.00	170.00
28.000		3	291.00	170.00
28.250		3	296.00	175.00
28.500		3	296.00	175.00
28.570	1 1/8	3	296.00	175.00
28.750		3	296.00	175.00
29.000		3	296.00	175.00
29.250		3	296.00	175.00
29.370	1 5/32	3	296.00	175.00
29.500		3	296.00	175.00
29.750		3	296.00	175.00


Availability							

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Taper shank twist drills

Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface		$>\frac{\sigma}{2,36}$				$>\frac{\sigma}{16,0}$	$>\frac{\sigma}{16,0}$
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143




d1		MK	l1	l2
mm	inch			
30.000		3	296.00	175.00
30.100		3	301.00	180.00
30.160	1 3/16	3	301.00	180.00
30.250		3	301.00	180.00
30.300		3	301.00	180.00
30.500		3	301.00	180.00
30.560	1 13/64	3	301.00	180.00
30.750		3	301.00	180.00
31.000		3	301.00	180.00
31.250		3	301.00	180.00
31.500		3	301.00	180.00
31.750	1 1/4	3	306.00	185.00
32.000		4	334.00	185.00
32.150	1 17/64	4	334.00	185.00
32.250		4	334.00	185.00
32.500		4	334.00	185.00
32.540	1 9/32	4	334.00	185.00
32.750		4	334.00	185.00
33.000		4	334.00	185.00
33.340	1 5/16	4	334.00	185.00
33.500		4	334.00	185.00
33.730	1 21/64	4	339.00	190.00
34.000		4	339.00	190.00
34.500		4	339.00	190.00
34.750		4	339.00	190.00
34.920	1 3/8	4	339.00	190.00
35.000		4	339.00	190.00
35.500		4	339.00	190.00
36.000		4	344.00	195.00
36.500		4	344.00	195.00
36.750		4	344.00	195.00
37.000		4	344.00	195.00
37.310	1 15/32	4	344.00	195.00
37.500		4	344.00	195.00
37.700	1 31/64	4	349.00	200.00
38.000		4	349.00	200.00
38.100	1 1/2	4	349.00	200.00
38.500	1 33/64	4	349.00	200.00
39.000		4	349.00	200.00

Availability						
●	●					
	●				○	
	●			○		
	●		○	○	○	
	●					
	●			○		
○	●		○		○	
	●		○			
	●					
	●				○	
	●					
	○					
	●					
	●					
	●					
	●					
	●					
	●					
●	●					
	●				○	
	●					
	●					
	○					
	●					
	●					
	○				○	
	●					
	●					
	●					
	●					



Taper shank twist
drills

Guhring no.	229	245	246	247	248	558	592
Standard	DIN 345						
Tool material	HSS						
Surface							
Type	N	N	H	W	N	GT 100	N
Cutting direction	right-hand	right-hand	right-hand	right-hand	left-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	138	132	138	138	138	138	138
Techn. data page	142	142	142	143	143	143	143

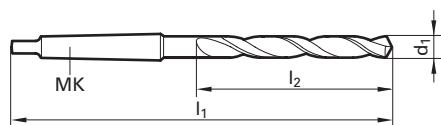


d1		MK	l1	l2
mm	inch			
39.500		4	349.00	200.00
39.690	1 9/16	4	349.00	200.00
40.000		4	349.00	200.00
40.500		4	354.00	205.00
40.750		4	354.00	205.00
40.800		4	354.00	205.00
40.880	1 39/64	4	354.00	205.00
41.000		4	354.00	205.00
41.270	1 5/8	4	354.00	205.00
41.500		4	354.00	205.00
42.000		4	354.00	205.00
42.500		4	354.00	205.00
43.000		4	359.00	210.00
43.500		4	359.00	210.00
44.000		4	359.00	210.00
44.450	1 3/4	4	359.00	210.00
44.500		4	359.00	210.00
45.000		4	359.00	210.00
45.240	1 25/32	4	364.00	215.00
45.500		4	364.00	215.00
46.000		4	364.00	215.00
46.040	1 13/16	4	364.00	215.00
46.430	1 53/64	4	364.00	215.00
46.500		4	364.00	215.00
46.830	1 27/32	4	364.00	215.00
47.000		4	364.00	215.00
47.230	1 55/64	4	364.00	215.00
47.500		4	364.00	215.00
47.620	1 7/8	4	369.00	220.00
48.000		4	369.00	220.00
48.020	1 57/64	4	369.00	220.00
48.500		4	369.00	220.00
48.820	1 59/64	4	369.00	220.00
49.000		4	369.00	220.00
49.500		4	369.00	220.00
49.610	1 61/64	4	369.00	220.00
50.000		4	369.00	220.00
50.500		4	374.00	225.00
50.800	2	4	374.00	225.00

Availability						

bright steam tempered nitrided lands nitrided golden brown TiAlN TiAlN nanoA TiAlN SuperA

Guhring no.	606	654	345	645	661	662	1222
Standard	DIN 345						
Tool material	HSS			HSCO			
Surface	S	S	●	● >Ø 16,0	S	S	C
Type	GT 100	N	N	GT 100	N	GT 100	GT 100
Cutting direction	right-hand right-hand right-hand right-hand right-hand right-hand right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	139	133	134	138	139	139	139
Techn. data page	143	144	144	144	144	144	145

Taper shank twist drills




d1		MK	l1	l2	Availability							
mm	inch				606	654	345	645	661	662	1222	
12.150		1	182.00	101.00			○					
12.200		1	182.00	101.00		●	○			○		
12.250		1	182.00	101.00	○		●					
12.300	31/64	1	182.00	101.00				○		○		○
12.400		1	182.00	101.00		●						
12.500		1	182.00	101.00	○	●	●	●		○		○
12.700	1/2	1	182.00	101.00		●	●		○			○
12.750		1	182.00	101.00	○	●	○					
12.800		1	182.00	101.00		○						
13.000		1	182.00	101.00		●	●	●	●	●		
13.100	33/64	1	182.00	101.00			○	○				
13.250		1	189.00	108.00	○							
13.300		1	189.00	108.00			○	○				
13.490	17/32	1	189.00	108.00		●	●					
13.500		1	189.00	108.00		●	●	●	●			
13.700		1	189.00	108.00			○					
13.750		1	189.00	108.00			●					
13.890	35/64	1	189.00	108.00		○						
13.900		1	189.00	108.00			●	●	●	●		
14.000		1	189.00	108.00	○	●	●	●	●	●		
14.100		2	212.00	114.00			●					
14.200		2	212.00	114.00		●	●					○
14.250		2	212.00	114.00		●	●	●				
14.290	9/16	2	212.00	114.00		●	●	○		○		
14.500		2	212.00	114.00	○	●	●	●	●			
14.680	37/64	2	212.00	114.00		○						
14.750		2	212.00	114.00		●	●					
14.900		2	212.00	114.00		○						
15.000		2	212.00	114.00	○	●	●	●	●	●		
15.080	19/32	2	218.00	120.00			●					
15.200		2	218.00	120.00				○				
15.250		2	218.00	120.00		●	●	●				
15.500		2	218.00	120.00		●	●	●	●	●		
15.750		2	218.00	120.00	●	●	●	●				
15.870	5/8	2	218.00	120.00	○	●	●	●	●	●		○
16.000		2	218.00	120.00		●	●	●	●	●		
16.100		2	223.00	125.00			●					
16.200		2	223.00	125.00		●						
16.250		2	223.00	125.00		●	●		●			

C TiCN
 Cb Carbo
 D Cristall
 F FIRE/nanoFIRE
 P AlCrN
 S TiN
 S+ TiN+
 M MolyGlide
 Y Signum



Taper shank twist drills

Guhring no.	606	654	345	645	661	662	1222
Standard	DIN 345						
Tool material	HSS		HSCO				
Surface							
Type	GT 100	N	N	GT 100	N	GT 100	GT 100
Cutting direction	right-hand right-hand right-hand right-hand right-hand right-hand right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	139	133	134	138	139	139	139
Techn. data page	143	144	144	144	144	144	145




d1		MK	l1	l2
mm	inch			
35.000		4	339.00	190.00
36.000		4	344.00	195.00
37.000		4	344.00	195.00
38.000		4	349.00	200.00
39.000		4	349.00	200.00
40.000		4	349.00	200.00
42.000		4	354.00	205.00
42.070	1 21/32	4	354.00	205.00
42.860	1 11/16	4	359.00	210.00
43.000		4	359.00	210.00
45.000		4	359.00	210.00
50.000		4	369.00	220.00

Availability	

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Guhring no.	1224	1262
Standard	DIN 345	
Tool material	HSCO	
Surface		
Type	GT 100	VA
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	139	134
Techn. data page	145	145



d1		MK	l1	l2	Availability	
mm	inch					
10.000		1	168.00	87.00		●
10.200		1	168.00	87.00		●
10.400		1	168.00	87.00	○	
10.500		1	168.00	87.00		●
10.800		1	175.00	94.00		●
11.000		1	175.00	94.00		●
11.110	7/16	1	175.00	94.00	○	
11.200		1	175.00	94.00		○
11.800		1	175.00	94.00		○
12.000		1	182.00	101.00		●
12.300	31/64	1	182.00	101.00	○	○
12.500		1	182.00	101.00		●
12.700	1/2	1	182.00	101.00	○	
13.000		1	182.00	101.00		●
13.490	17/32	1	189.00	108.00		○
13.500		1	189.00	108.00		●
13.750		1	189.00	108.00		●
13.800		1	189.00	108.00		●
14.000		1	189.00	108.00		●
14.200		2	212.00	114.00	○	
14.250		2	212.00	114.00		●
14.290	9/16	2	212.00	114.00	○	
14.500		2	212.00	114.00		●
14.750		2	212.00	114.00		●
15.000		2	212.00	114.00		●
15.250		2	218.00	120.00		●
15.480	39/64	2	218.00	120.00		○
15.500		2	218.00	120.00		●
15.870	5/8	2	218.00	120.00	○	○
16.000		2	218.00	120.00	○	●
16.250		2	223.00	125.00		○
16.500		2	223.00	125.00	○	●
17.000		2	223.00	125.00		●
17.460		2	228.00	130.00	○	
17.500		2	228.00	130.00		●
17.860	45/64	2	228.00	130.00		○
18.000		2	228.00	130.00		●
18.500		2	233.00	135.00		●
19.000		2	233.00	135.00	○	●

TiCN

Carbo

Cristall

FIRE/nanoFIRE

AlCrN

TiN


TiN+

MolyGlide

Signum



Guhring no.	1224	1262
Standard	DIN 345	
Tool material	HSCO	
Surface	A	○
Type	GT 100	VA
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	139	134
Techn. data page	145	145



d1		MK	l1	l2
mm	inch			
19.500		2	238.00	140.00
20.000		2	238.00	140.00
20.500		2	243.00	145.00
21.000		2	243.00	145.00
21.500		2	248.00	150.00
21.750		2	248.00	150.00
22.000		2	248.00	150.00
22.500		2	253.00	155.00
23.000		2	253.00	155.00
23.420	59/64	3	276.00	155.00
23.810	15/16	3	281.00	160.00
24.000		3	281.00	160.00
24.500		3	281.00	160.00
25.000	63/64	3	281.00	160.00
25.500		3	286.00	165.00
26.000		3	286.00	165.00
26.500		3	286.00	165.00
26.990	1 1/16	3	291.00	170.00
27.000		3	291.00	170.00
27.500		3	291.00	170.00
28.000		3	291.00	170.00
28.500		3	296.00	175.00
29.000		3	296.00	175.00
29.500		3	296.00	175.00
30.000		3	296.00	175.00
30.160	1 3/16	3	301.00	180.00
31.500		3	301.00	180.00
31.750	1 1/4	3	306.00	185.00
32.000		4	334.00	185.00
34.000		4	339.00	190.00

Availability	
●	●
	●
	●
	●
	○
	●
	●
	●
○	○
	●
	●
	●
○	○
	●
○	●
○	●
○	●
○	●
○	●
○	●
○	●
○	○
	○
	●
	●
	●


○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown **A** TiAIN **a** TiAIN nanoA **A** TiAIN SuperA



Bushing length twist drills

Taper shank twist drills

Guhring no.	257	505	551	655	656	357	623
Standard	DIN 341						
Tool material	HSS					HSCO	
Surface	●	○	● $>\frac{\phi}{16,0}$	● S	● S	○	● $>\frac{\phi}{16,0}$
Type	N	GT50	GT 100	N	GT 100	N	GT 100
Cutting direction	right-hand right-hand right-hand right-hand right-hand right-hand right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	136	133	139	138	138
Techn. data page	146	146	146	146	146	147	147




d1		MK	l1	l2	Availability							
mm	inch		mm	mm								
8.100		1	181.00	100.00	●							
8.200		1	181.00	100.00	●	●						○
8.250		1	181.00	100.00	○							
8.300		1	181.00	100.00								
8.330	21/64	1	181.00	100.00								
8.400		1	181.00	100.00		○						
8.500		1	181.00	100.00	●	○			●			
8.600		1	188.00	107.00	●	●			○			
8.700		1	188.00	107.00	○				○			
8.750		1	188.00	107.00	●				○			
8.800		1	188.00	107.00	●				○			
8.900		1	188.00	107.00	○						●	
9.000		1	188.00	107.00	●			●		●		
9.050		1	188.00	107.00		○						
9.100		1	188.00	107.00	○							
9.300		1	188.00	107.00	●							
9.400		1	188.00	107.00	○							
9.500		1	188.00	107.00	●			●		○		●
9.520	3/8	1	197.00	116.00								
9.600		1	197.00	116.00	●	○						
9.700		1	197.00	116.00		●						
9.750		1	197.00	116.00	●							
9.800		1	197.00	116.00	●						●	
9.900		1	197.00	116.00	○							
9.920	25/64	1	197.00	116.00								
10.000		1	197.00	116.00	●	●		●		●		●
10.050		1	197.00	116.00	○				○			
10.100		1	197.00	116.00	●				○			
10.200		1	197.00	116.00	●			●		○		●
10.250		1	197.00	116.00	●	○		○			○	
10.300		1	197.00	116.00	●							
10.320	13/32	1	197.00	116.00						○		●
10.400		1	197.00	116.00	●			●				
10.500		1	197.00	116.00	●			●		○		●
10.600		1	197.00	116.00	○							
10.700		1	206.00	125.00		○						
10.720	27/64	1	206.00	125.00								
10.750		1	206.00	125.00	●			○				
10.800		1	206.00	125.00	●							●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Taper shank twist drills

Guhring no.	257	505	551	655	656	357	623
Standard	DIN 341						
Tool material	HSS					HSCO	
Surface	●	○	● $\frac{>\phi}{16,0}$	● S	● S	●	● $\frac{>\phi}{16,0}$
Type	N	GT50	GT 100	N	GT 100	N	GT 100
Cutting direction	right-hand right-hand right-hand right-hand right-hand right-hand right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	136	133	139	138	138
Techn. data page	146	146	146	146	146	147	147




d1		MK	l1	l2	Availability										
mm	inch				●	○	●	○	●	○	●	○			
10.900		1	206.00	125.00	●										
11.000		1	206.00	125.00	●										
11.100		1	206.00	125.00			○								
11.110	7/16	1	206.00	125.00			●				○				○
11.200		1	206.00	125.00			○								●
11.250		1	206.00	125.00	○			○							
11.300		1	206.00	125.00	●										
11.400		1	206.00	125.00	●					○					
11.500		1	206.00	125.00	●		○		●	●	●				●
11.510	29/64	1	206.00	125.00				○							○
11.750		1	206.00	125.00	●				○						
11.800		1	206.00	125.00	●		○		●						●
12.000		1	215.00	134.00	●		○		●	●	●				●
12.050		1	215.00	134.00				○							
12.100		1	215.00	134.00	●										
12.200		1	215.00	134.00	●		○								○
12.250		1	215.00	134.00	●		○				●				
12.300	31/64	1	215.00	134.00	●			○							
12.400		1	215.00	134.00	●										●
12.500		1	215.00	134.00	●		○		●	○	●				●
12.600		1	215.00	134.00	●										
12.700	1/2	1	215.00	134.00			○								○
12.750		1	215.00	134.00					●						
12.800		1	215.00	134.00	●		○		●	○					
13.000		1	215.00	134.00	●		●		●	●	●				●
13.100	33/64	1	215.00	134.00	●				○						
13.200		1	215.00	134.00	●		○		○						●
13.250		1	223.00	142.00			○								
13.490	17/32	1	223.00	142.00	○										●
13.500		1	223.00	142.00	●				●	○			●		●
13.750		1	223.00	142.00	●		○						○		
13.800		1	223.00	142.00			○		●		○				
13.890	35/64	1	223.00	142.00					○						○
13.900		1	223.00	142.00	●										
14.000		1	223.00	142.00	●		●		●	●	●				●
14.100		2	245.00	147.00	●										
14.200		2	245.00	147.00			○		○						●
14.250		2	245.00	147.00	●		○		○						
14.290	9/16	2	245.00	147.00	○				●						●



Bushing length twist drills

Taper shank twist drills

Guhring no.	257	505	551	655	656	357	623
Standard	DIN 341						
Tool material	HSS					HSCO	
Surface	○	○	● ^{>Ø 16,0}	● ^S	● ^S	○	● ^{>Ø 16,0}
Type	N	GT50	GT 100	N	GT 100	N	GT 100
Cutting direction	right-hand right-hand right-hand right-hand right-hand right-hand right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	136	133	139	138	138
Techn. data page	146	146	146	146	146	147	147



d1		MK	l1	l2
mm	inch			
14.300		2	245.00	147.00
14.400		2	245.00	147.00
14.500		2	245.00	147.00
14.680	37/64	2	245.00	147.00
14.750		2	245.00	147.00
14.800		2	245.00	147.00
14.900		2	245.00	147.00
15.000		2	245.00	147.00
15.080	19/32	2	251.00	153.00
15.200		2	251.00	153.00
15.250		2	251.00	153.00
15.480	39/64	2	251.00	153.00
15.500		2	251.00	153.00
15.600		2	251.00	153.00
15.750		2	251.00	153.00
15.870	5/8	2	251.00	153.00
16.000		2	251.00	153.00
16.100		2	257.00	159.00
16.200		2	257.00	159.00
16.250		2	257.00	159.00
16.400		2	257.00	159.00
16.500		2	257.00	159.00
16.670	21/32	2	257.00	159.00
16.750		2	257.00	159.00
16.800		2	257.00	159.00
17.000		2	257.00	159.00
17.070	43/64	2	263.00	165.00
17.250		2	263.00	165.00
17.460	11/16	2	263.00	165.00
17.500		2	263.00	165.00
17.750		2	263.00	165.00
18.000		2	263.00	165.00
18.250		2	269.00	171.00
18.500		2	269.00	171.00
18.650	47/64	2	269.00	171.00
18.750		2	269.00	171.00
19.000		2	269.00	171.00
19.050	3/4	2	275.00	177.00
19.250		2	275.00	177.00

Availability						
○	○					
○	○					
●	○	●	●	●	●	●
●						●
●	○	●	○		●	
●						○
●		●	●	●	●	●
○						●
○						
●			●			
●	○			○	●	
●		○				
●					○	
●	○					○
●		●	●		●	●
○				○		
●						
●	○					
●		○				
●		●	●	●	●	●
●					○	
●						
●		○		○		
○						


○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Bushing length twist drills

Taper shank twist drills

Guhring no.	257	505	551	655	656	357	623
Standard	DIN 341						
Tool material	HSS					HSC0	
Surface	○	○	● >Ø 16,0	● S	● S	○	● >Ø 16,0
Type	N	GT50	GT 100	N	GT 100	N	GT 100
Cutting direction	right-hand						
Tolerance	h8	h8	h8	h8	h8	h8	h8
Discount group	132	138	136	133	139	138	138
Techn. data page	146	146	146	146	146	147	147



d1					MK	l1	l2	Availability						
mm	inch			mm				mm						
27.500				3	343.00	222.00								
28.000				3	343.00	222.00								
28.500				3	351.00	230.00								
28.570	1 1/8			3	351.00	230.00								
28.900				3	351.00	230.00								
28.970	1 9/64			3	351.00	230.00								
29.000				3	351.00	230.00								
29.250				3	351.00	230.00								
29.370	1 5/32			3	351.00	230.00								
29.500				3	351.00	230.00								
30.000				3	351.00	230.00								
30.500				3	360.00	239.00								
30.560	1 13/64			3	360.00	239.00								
30.960	1 7/32			3	360.00	239.00								
31.000				3	360.00	239.00								
31.500				3	360.00	239.00								
32.000				4	397.00	248.00								
33.000				4	397.00	248.00								
33.500				4	397.00	248.00								
34.000				4	406.00	257.00								
35.000				4	406.00	257.00								
36.000				4	416.00	267.00								
36.120	1 27/64			4	416.00	267.00								
36.910	1 29/64			4	416.00	267.00								
37.000				4	416.00	267.00								
37.500				4	416.00	267.00								
38.000				4	426.00	277.00								
39.000				4	426.00	277.00								
39.500				4	426.00	277.00								
40.000				4	426.00	277.00								
40.080	1 37/64			4	436.00	287.00								
40.880	1 39/64			4	436.00	287.00								
41.000				4	436.00	287.00								
41.670	1 41/64			4	436.00	287.00								
42.000				4	436.00	287.00								
43.000				4	447.00	298.00								
43.660	1 23/32			4	447.00	298.00								
44.000				4	447.00	298.00								
45.000				4	447.00	298.00								

○ bright ○ steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAIN ● a TiAIN nanoA ● A TiAIN SuperA



Bushing length twist drills

Taper shank twist drills

Guhring no.

523

Standard

Guhring std.

Tool material

HSS

Surface



Type

N

Cutting direction

right-hand

Tolerance


h8

Discount group

138

Techn. data page

147

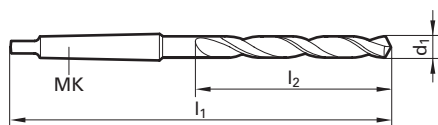

d1		MK	l1	l2
mm	inch			

10.000		2	214.00	116.00
11.000		2	223.00	125.00
12.300	31/64	2	232.00	134.00
12.500		2	232.00	134.00
13.000		2	232.00	134.00
14.000		2	240.00	142.00
21.000		3	305.00	184.00
22.000		3	312.00	191.00
23.000		3	319.00	198.00
29.000		4	379.00	230.00


Availability	
--------------	--

<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAlN
 TiAlN nanoA
 TiAlN SuperA



Guhring no.	269
Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	147



d1		MK	l1	l2
mm	inch			
19.050	3/4	2	275.00	163.00
19.200		2	275.00	163.00
19.250		2	275.00	163.00
19.500		2	275.00	163.00
19.750		2	275.00	163.00
19.840	25/32	2	275.00	163.00
20.250		2	282.00	170.00
20.640	13/16	2	282.00	170.00
20.750		2	282.00	170.00
21.000		2	282.00	170.00
21.430	27/32	2	289.00	177.00
21.500		2	289.00	177.00
22.220	7/8	2	289.00	177.00
23.020	29/32	2	296.00	184.00



Availability	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	
○	



Oil feed drills, flute length to DIN 341

Taper shank twist drills

Guhring no.	270	271	272	370	371	372
Standard	Guhring std.					
Tool material	HSS			HSCO		
Surface	●	●	●	●	●	●
Type	N	N	N	GT 100	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8	h8	h8
Discount group	138	138	138	138	138	138
Techn. data page	148	148	148	148	148	149

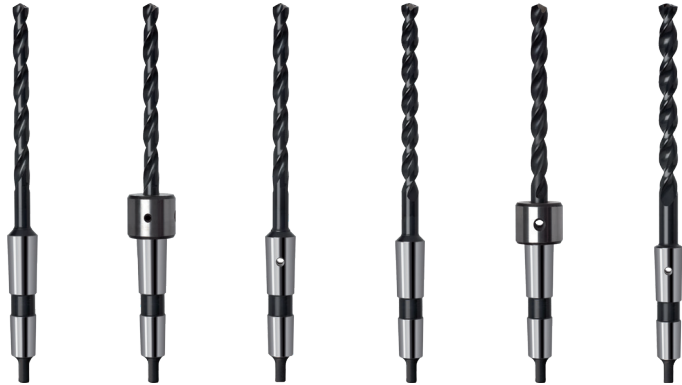


d1		MK	l1	l2	Availability						
mm	inch				●	○	●	○	●	○	●
10.000		2	233.00	116.00	●	○	○				
10.500		2	233.00	116.00		○					
10.720	27/64	2	242.00	125.00		○					
11.000		2	242.00	125.00	●	○	○	●	○		
11.110	7/16	2	242.00	125.00					○		
11.500		2	242.00	125.00					○		
11.510	29/64	2	242.00	125.00		○					
11.910	15/32	2	251.00	134.00		○					
12.000		2	251.00	134.00	●			●			
12.300	31/64	2	251.00	134.00		○			○		
12.500		2	251.00	134.00			○		○		○
12.700	1/2	2	251.00	134.00	○						○
12.800		2	251.00	134.00					○		
13.000		2	251.00	134.00	●	○		●	○		
13.200		2	251.00	134.00	○		○				
13.490		2	259.00	142.00			○		○		
13.500		2	259.00	142.00	●	○	●	●	○		
13.800		2	259.00	142.00		○					
14.000		2	259.00	142.00	●	○		●	○		●
14.250		2	264.00	147.00		○					
14.290	9/16	2	264.00	147.00	○	○		○	○		
14.500		2	264.00	147.00		○		○	○		
14.750		2	264.00	147.00			○				
15.000		2	264.00	147.00	●	○		●	○		
15.080	19/32	2	270.00	153.00		○		○			
15.500		2	270.00	153.00	●	○	○				
15.870	5/8	2	270.00	153.00			○				
16.000		2	270.00	153.00	●	○		●	○		○
16.250		2	276.00	159.00	●						
16.500		2	276.00	159.00	●	○			○		
16.670	21/32	2	276.00	159.00			○		○		
17.000		2	276.00	159.00	●	○	○	●	○		○
17.250		2	282.00	165.00		○					
17.460	11/16	2	282.00	165.00	○				○		
17.500		2	282.00	165.00	●	○		●	○		
18.000		2	282.00	165.00	●		○	●			
18.250		3	307.00	171.00		○					
18.260	23/32	3	307.00	171.00					○		
18.500		3	307.00	171.00	●	○	○	●			○

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● A TiAlN ● a TiAlN nanoA ● A TiAlN SuperA



Taper shank twist drills

Gühring no.	266	525	526	620
Standard	DIN 1870			
Tool material	HSS			HSCO
Surface			$\frac{Ra}{16,0} > 0$	$\frac{Ra}{16,0} > 0$
Type	N	GT50	GT 100	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	134	138	136	138
Techn. data page	149	150	150	150




d1		MK	l1	l2
mm	inch			
26.000		3	440.00	290.00
26.500		3	440.00	290.00
27.000		3	460.00	305.00
27.180		3	460.00	305.00
27.500		3	460.00	305.00
28.000		3	460.00	305.00
28.500		3	460.00	305.00
29.000		3	460.00	305.00
29.370	1 5/32	3	460.00	305.00
30.000		3	460.00	305.00
30.500		3	480.00	320.00
31.000		3	480.00	320.00
32.000		4	505.00	320.00
33.000		4	505.00	320.00
34.000		4	530.00	340.00
35.000		4	530.00	340.00
36.000		4	530.00	340.00
38.000		4	555.00	360.00
39.000		4	555.00	360.00
40.000		4	555.00	360.00
42.000		4	555.00	360.00
45.000		4	585.00	385.00
45.240	1 25/32	4	585.00	385.00
48.000		4	605.00	405.00
50.000		4	605.00	405.00

Availability			
●	○	●	●
●	○	●	
●			○
	○		
●	●	●	
	○	○	
	○	●	
			○
●		●	●
●			
●	○		
●		●	
●			
●			
●			
●			
●			
●			
●			
●			
●			
●			
●			
○			
●			
●			
●			



Taper shank twist drills

Guhring no.	267	527	542	621
Standard	DIN 1870			
Tool material	HSS			HSCO
Surface		$>0/16,0$		$>0/16,0$
Type	N	GT 100	GT50	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	138	136	138	138
Techn. data page	150	150	151	151




d1		MK	l1	l2	Availability			
mm	inch							
16.500		2	445.00	295.00	●	●		
16.900		2	445.00	295.00	○			
17.000		2	445.00	295.00	●	●	○	
17.070	43/64	2	465.00	310.00	○	○		
17.500		2	465.00	310.00	●	●	○	
17.800		2	465.00	310.00		○		
18.000		2	465.00	310.00	●	●		●
18.500		2	465.00	310.00	●	●		●
18.650	47/64	2	465.00	310.00				○
19.000		2	465.00	310.00	●	●		●
19.050	3/4	2	490.00	325.00	○			○
19.450	49/64	2	490.00	325.00		●		
19.500		2	490.00	325.00	●	●		
20.000		2	490.00	325.00	●	●	○	●
20.240	51/64	2	490.00	325.00				○
20.500		2	490.00	325.00		●	○	
20.640	13/16	2	490.00	325.00	○			
21.000		2	490.00	325.00	●	●	○	
21.030	53/64	2	490.00	325.00		○		
21.430	27/32	2	515.00	345.00	○	○		○
21.500		2	515.00	345.00	●		○	
21.830	55/64	2	515.00	345.00	●	○		
22.000		2	515.00	345.00	●	●	●	
22.500		2	515.00	345.00		●	○	
22.620	57/64	2	515.00	345.00	○			
22.800		2	515.00	345.00	○			
23.000		2	515.00	345.00	●	●	○	
23.020	29/32	2	515.00	345.00	○	○		
23.420	59/64	3	535.00	345.00				●
23.500		3	535.00	345.00			○	
23.750		3	555.00	365.00	○			
23.810	15/16	3	555.00	365.00	○	○		
24.000		3	555.00	365.00	●	●	○	
24.210	61/64	3	555.00	365.00		○		
24.500		3	555.00	365.00	●	○	○	
24.610	31/32	3	555.00	365.00		○		
25.000	63/64	3	555.00	365.00	●	●		
25.500		3	555.00	365.00			○	
25.800	1 1/64	3	555.00	365.00		○		

Extra length twist drills, series 2

Taper shank twist drills

Guhring no.	267	527	542	621
Standard	DIN 1870			
Tool material	HSS			HSCO
Surface	●	● ^{>0} _{16,0}	○	● ^{>0} _{16,0}
Type	N	GT 100	GT50	GT 100
Cutting direction	right-hand	right-hand	right-hand	right-hand
Tolerance	h8	h8	h8	h8
Discount group	138	136	138	138
Techn. data page	150	150	151	151



d1		MK	l1	l2
mm	inch			
26.000		3	555.00	365.00
26.190	1 1/32	3	555.00	365.00
26.500		3	555.00	365.00
27.000		3	580.00	385.00
27.500		3	580.00	385.00
28.000		3	580.00	385.00
28.750		3	580.00	385.00
29.000		3	580.00	385.00
29.500		3	580.00	385.00
30.000		3	580.00	385.00
31.000		3	610.00	410.00
32.000		4	635.00	410.00
34.000		4	665.00	430.00
40.000		4	695.00	460.00
45.000		4	735.00	490.00


Availability			
●			○
	●		
	●		●
			○
			○
●	●		○
	○		
	●		○
○	●		○
●			○
●			●
●			
●			
●			
●			
●			
●			
●			
●			
●			
●			

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Taper shank twist drills

Guhring no.	293	564
Standard	Guhring std.	
Tool material	HSS	
Surface		
Type	GT 100	GT 100
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	151	152

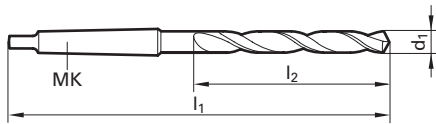

d1	MK	l1	l2
mm		mm	mm
6.000	1	300.00	220.00
6.500	1	300.00	220.00
7.000	1	300.00	220.00
8.000	1	350.00	270.00
8.500	1	350.00	270.00
9.000	1	350.00	270.00
10.000	1	350.00	270.00
14.000	1	600.00	500.00
15.000	2	600.00	500.00
16.000	2	600.00	500.00
17.000	2	600.00	500.00
18.000	2	600.00	500.00
19.000	2	600.00	500.00
20.000	2	600.00	500.00
21.000	2	600.00	500.00
22.000	2	600.00	500.00
23.000	2	600.00	500.00
24.000	3	600.00	475.00
25.000	3	600.00	475.00
26.000	3	600.00	475.00
28.000	3	600.00	475.00
30.000	3	600.00	475.00
32.000	4	600.00	450.00
35.000	4	600.00	450.00
38.000	4	600.00	450.00
40.000	4	600.00	450.00


Availability	
6.000	●
6.500	●
7.000	●
8.000	●
8.500	●
9.000	●
10.000	●
14.000	●
15.000	●
16.000	●
17.000	●
18.000	●
19.000	●
20.000	●
21.000	●
22.000	●
23.000	●
24.000	●
25.000	●
26.000	●
28.000	●
30.000	●
32.000	●
35.000	●
38.000	●
40.000	●

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAIN
● a TiAIN nanoA
● A TiAIN SuperA



Taper shank twist drills

Gühring no.	298
Standard	Gühring std.
Tool material	HSS
Surface	○
Type	GT 100
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	152

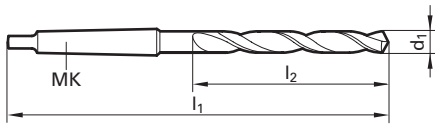

d1	MK	l1	l2
mm		mm	mm
14.000	1	750.00	650.00
15.000	2	750.00	650.00
16.000	2	750.00	650.00
18.000	2	750.00	650.00


Availability	
●	Available
●	Available
●	Available
●	Available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available
	Not available

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 A TiAIN
 a TiAIN nanoA
 A TiAIN SuperA



Taper shank twist drills

Gühring no.	299
Standard	Gühring std.
Tool material	HSS
Surface	○
Type	GT 100
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	152

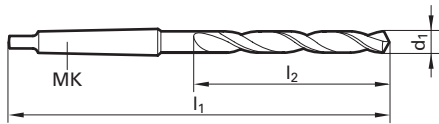


d1	MK	l1	l2
mm		mm	mm
14.000	1	1000.00	850.00
15.000	2	1000.00	850.00
16.000	2	1000.00	850.00
18.000	2	1000.00	850.00

Availability	
●	
●	
●	
●	



Taper shank twist drills


Guhring no.	705
Standard	DIN 8041
Tool material	Carbide
Surface	
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	102
Techn. data page	153



d1	MK	l1	l2	Availability
mm		mm	mm	
8.500	1	135.00	45.00	●
10.000	1	140.00	50.00	●
10.200	1	140.00	50.00	●
10.500	1	140.00	50.00	○
11.000	1	140.00	50.00	●
11.500	1	146.00	56.00	●
12.000	1	146.00	56.00	●
13.000	1	146.00	56.00	●
13.500	2	168.00	63.00	●
14.000	2	168.00	63.00	●
14.500	2	168.00	63.00	●
15.000	2	168.00	63.00	●
15.500	2	175.00	70.00	●
16.000	2	175.00	70.00	●
16.500	2	175.00	70.00	●
17.000	2	175.00	70.00	●
17.500	2	185.00	80.00	●
18.000	2	185.00	80.00	●
19.000	2	185.00	80.00	●
19.500	3	215.00	90.00	●
20.000	3	215.00	90.00	●
21.000	3	215.00	90.00	●
21.500	3	215.00	90.00	●
22.000	3	215.00	90.00	●
23.000	3	225.00	100.00	●
24.000	3	225.00	100.00	●
24.500	3	225.00	100.00	●
25.000	3	225.00	100.00	●
26.000	4	260.00	110.00	●
26.500	4	260.00	110.00	●
27.000	4	260.00	110.00	●
28.000	4	260.00	110.00	●
30.000	4	275.00	125.00	●
32.000	4	275.00	125.00	●
33.000	4	290.00	140.00	●
38.000	4	310.00	160.00	●
40.000	4	310.00	160.00	●



Guhring no.	575
Standard	Guhring std.
Tool material	HSS
Surface	
Type	N
Form	for countersinks form D
Cutting direction	right-hand
Discount group	138
Techn. data page	154



d3 h7	d2	d1 h8	l1	l2	l4	l5	for
mm	mm	mm	mm	mm	mm	mm	thread
8.000	4.300	3.300	63.00	23.00	11.00	1.60	M 4
10.000	5.300	4.200	67.00	27.00	13.00	2.15	M 5
12.500	6.400	5.000	71.00	33.00	16.00	2.90	M 6
14.000	8.400	6.800	88.00	41.00	19.50	3.50	M 8
16.000	10.500	8.500	94.00	47.00	23.00	4.70	M10
20.000	13.000	10.200	105.00	59.00	28.00	6.50	M12

Availability
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●
●



Stepped drills for centering to DIN 332

Step drills

Guhring no.

576

Standard

Guhring std.

Tool material

HSS

Surface



Type

N

Form

for countersinks form D

Cutting direction


right-hand

Discount group

138

Techn. data page

154

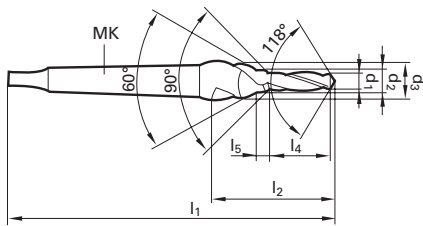


d3 h7	d2	d1 h8	MK	l1	l2	l4	l5	for
mm	mm	mm		mm	mm	mm	mm	thread
14.000	8.400	6.800	1	110.00	41.00	19.50	3.50	M 8
16.000	10.500	8.500	2	131.00	47.00	23.00	4.70	M10
20.000	13.000	10.200	2	145.00	59.00	28.00	6.50	M12
25.000	17.000	14.000	3	172.00	67.00	33.00	8.30	M16
31.500	21.000	17.500	3	184.00	76.50	38.00	10.35	M20
40.000	25.000	21.000	4	222.00	90.00	45.00	12.00	M24

Availability





Guhring no.	379
Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Form	medial tolerances
Cutting direction	right-hand
Discount group	138
Techn. data page	155




d2	d1	l1	l2	l3	for
mm	mm	mm	mm	mm	thread
6.000	3.400	66.00	28.00	9.00	M 3
8.000	4.500	79.00	37.00	11.00	M 4
10.000	5.500	89.00	43.00	13.00	M 5
11.000	6.600	95.00	47.00	15.00	M 6
15.000	9.000	111.00	56.00	19.00	M 8
18.000	11.000	123.00	62.00	23.00	M10

Availability






Guhring no.	380
Standard	Guhring std.
Tool material	HSS
Surface	○
Type	N
Form	for tapping size holes
Cutting direction	right-hand
Discount group	138
Techn. data page	155

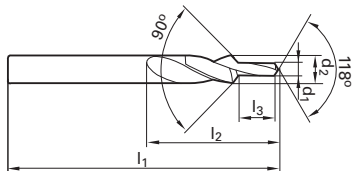


d2	d1	l1	l2	l3	for
mm	mm	mm	mm	mm	thread
3.400	2.500	52.00	20.00	8.80	M 3
4.500	3.300	58.00	24.00	11.40	M 4
5.500	4.200	66.00	28.00	13.60	M 5
6.600	5.000	70.00	31.00	16.50	M 6
9.000	6.800	84.00	40.00	21.00	M 8
11.000	8.500	95.00	47.00	25.50	M10
13.500	10.200	107.00	54.00	30.00	M12

Availability





Gühring no.	536	569	636	638
Standard	DIN 8374		Gühring std.	
Tool material	HSS			
Surface	●	●	●	●
Type	N	N	N	N
Form	A	B	medial tolerances fine tolerances	
Cutting direction	right-hand	right-hand	right-hand	right-hand
Discount group	138	138	138	138
Techn. data page	155	155	156	156




d2	d1	l1	l2	l3	for
mm	mm	mm	mm	mm	thread
6.000	3.200	93.00	57.00	9.00	M 3
6.600	3.400	101.00	63.00	9.00	M 3
7.500	3.400	109.00	69.00	9.00	M 3
8.000	4.300	117.00	75.00	11.00	M 4
9.000	4.500	125.00	81.00	11.00	M 4
9.700	4.500	133.00	87.00	11.00	M 4
10.000	5.300	133.00	87.00	13.00	M 5
11.000	5.500	142.00	94.00	13.00	M 5
11.500	6.400	142.00	94.00	15.00	M 6
12.000	5.500	151.00	101.00	13.00	M 5
13.000	6.600	151.00	101.00	15.00	M 6
14.500	6.600	169.00	114.00	15.00	M 6
15.000	8.400	169.00	114.00	19.00	M 8
17.200	9.000	191.00	130.00	19.00	M 8
19.000	9.000	198.00	135.00	19.00	M 8

Availability			
●		●	●
	●		
●			●
	●	●	
●			●
	●		
	●	●	
●			●
	●	●	



Step drills

Gühring no.	538	738
Standard	DIN 8376	Gühring std.
Tool material	HSS	Solid carbide
Surface	●	○
Type	N	N
Form	medial tolerances	medial tolerances
Cutting direction	right-hand	right-hand
Discount group	138	102
Techn. data page	156	156




d2	d1	l1	l2	l3	for
mm	mm	mm	mm	mm	thread
6.000	3.400	93.00	57.00	9.00	M 3
8.000	4.500	117.00	75.00	11.00	M 4
10.000	5.500	133.00	87.00	13.00	M 5
11.000	6.600	142.00	94.00	15.00	M 6
15.000	9.000	169.00	114.00	19.00	M 8
18.000	11.000	191.00	130.00	23.00	M10

Availability	
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●
●	●



Gühring no.	514
Standard	Gühring std.
Tool material	HSS
Surface	
Type	N
Form	
Cutting direction	right-hand
Discount group	138
Techn. data page	156



d2	d1	l1	l2	l3	for
mm	mm	mm	mm	mm	thread
5.900	3.200	93.00	57.00	11.00	M 3
7.400	4.300	109.00	69.00	13.00	M 4
8.000	4.800	117.00	75.00	13.00	M 4
9.400	5.300	125.00	81.00	16.00	M 5
10.000	5.800	133.00	87.00	16.00	M 5
10.400	6.400	133.00	87.00	19.00	M 6
11.000	7.000	142.00	94.00	19.00	M 6
13.500	8.400	160.00	108.00	22.00	M 8
16.500	10.500	184.00	125.00	25.00	M10
17.500	11.500	191.00	130.00	25.00	M10

Availability	



Guhring no.

637

537

Standard

Guhring std.

Tool material

HSS

Surface



Type

N

N

Form

fine tolerances

medial tolerances

Cutting direction

right-hand

right-hand

Discount group


138

138

Techn. data page

157

157




d2	d1	MK	l1	l2	l3	for
mm	mm		mm	mm	mm	thread
11.000	5.500	1	175.00	94.00	13.00	M 5
11.500	6.400	1	175.00	94.00	15.00	M 6
15.000	8.400	2	212.00	114.00	19.00	M 8
17.200	9.000	2	228.00	130.00	19.00	M 8
19.000	10.500	2	233.00	135.00	23.00	M10
21.500	11.000	2	248.00	150.00	23.00	M10
23.000	13.000	2	253.00	155.00	27.00	M12
26.000	14.000	3	286.00	165.00	27.00	M12
29.000	16.000	3	296.00	175.00	31.00	M14
30.000	17.000	3	296.00	175.00	35.00	M16

Availability	
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input checked="" type="radio"/>
<input checked="" type="radio"/>	<input checked="" type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>
<input checked="" type="radio"/>	<input type="radio"/>



Gühring no.	639
Standard	Gühring std.
Tool material	HSS
Surface	
Type	N
Form	fine tolerances
Cutting direction	right-hand
Discount group	138
Techn. data page	157




d2	d1	MK	l1	l2	l3	for
mm	mm		mm	mm	mm	thread
18.000	10.500	2	228.00	130.00	23.00	M10
20.000	13.000	2	238.00	140.00	27.00	M12
26.000	17.000	3	286.00	165.00	35.00	M16

Availability
●
●
●



Gühring no.	539
Standard	DIN 8377
Tool material	HSS
Surface	
Type	N
Form	medial tolerances
Cutting direction	right-hand
Discount group	138
Techn. data page	158




d2	d1	MK	l1	l2	l3	for
mm	mm		mm	mm	mm	thread
10.000	5.500	1	168.00	87.00	13.00	M 5
11.000	6.600	1	175.00	94.00	15.00	M 6
15.000	9.000	2	212.00	114.00	19.00	M 8
18.000	11.000	2	228.00	130.00	23.00	M10
20.000	13.500	2	238.00	140.00	27.00	M12
26.000	17.500	3	286.00	165.00	35.00	M16
30.000	20.000	3	296.00	175.00	39.00	M18
33.000	22.000	4	334.00	185.00	43.00	M20

Availability	
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>
	<input type="checkbox"/>



Gühring no.	520
Standard	Gühring std.
Tool material	HSS
Surface	
Type	N
Form	
Cutting direction	right-hand
Discount group	138
Techn. data page	158



d2	d1	MK	l1	l2	l3	for
mm	mm		mm	mm	mm	thread
9.400	5.300	1	162.00	81.00	16.00	M 5
10.000	5.800	1	168.00	87.00	16.00	M 5
10.400	6.400	1	168.00	87.00	19.00	M 6
11.000	7.000	1	175.00	94.00	19.00	M 6
13.500	8.400	1	189.00	108.00	22.00	M 8
14.500	9.500	2	212.00	114.00	22.00	M 8
16.500	10.500	2	223.00	125.00	25.00	M10
17.500	11.500	2	228.00	130.00	25.00	M10
19.000	13.000	2	233.00	135.00	28.00	M12
20.000	14.000	2	238.00	140.00	28.00	M12
23.000	15.000	2	253.00	155.00	30.00	M14
24.000	16.000	3	281.00	160.00	30.00	M14
25.000	17.000	3	281.00	160.00	33.00	M16
26.000	18.000	3	286.00	165.00	33.00	M16
28.000	19.000	3	291.00	170.00	36.00	M18
29.000	20.000	3	296.00	175.00	36.00	M18
31.000	21.000	3	301.00	180.00	39.00	M20
33.000	23.000	4	334.00	185.00	39.00	M20

Availability
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input checked="" type="radio"/>
<input checked="" type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>



Gühring no.

541

Standard

DIN 8379

Tool material

HSS

Surface



Type

N

Form

for tapping size holes

Cutting direction


right-hand

Discount group

138

Techn. data page

158




d2	d1	MK	l1	l2	l3	for
mm	mm		mm	mm	mm	thread
9.000	6.800	1	162.00	81.00	21.00	M 8
11.000	8.500	1	175.00	94.00	25.50	M10
13.500	10.200	1	189.00	108.00	30.00	M12
15.500	12.000	2	218.00	120.00	34.50	M14
17.500	14.000	2	228.00	130.00	38.50	M16
20.000	15.500	2	238.00	140.00	43.50	M18
22.000	17.500	2	248.00	150.00	47.50	M20

Availability






Gühring no.	533
Standard	DIN 344
Tool material	HSS
Surface	
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	165

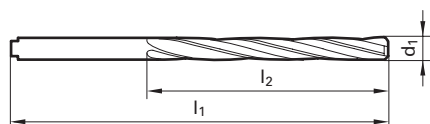

d1	d0 ≥	l1	l2	Availability
mm		mm	mm	
3.800	2.800	96.00	64.00	●
4.000	2.800	96.00	64.00	●
4.100	2.800	96.00	64.00	●
4.400	3.200	102.00	69.00	●
4.500	3.200	102.00	69.00	●
4.600	3.200	102.00	69.00	●
4.750	3.200	102.00	69.00	●
4.800	3.500	108.00	74.00	●
4.900	3.500	108.00	74.00	●
5.000	3.500	108.00	74.00	●
5.050	3.500	108.00	74.00	●
5.100	3.500	108.00	74.00	●
5.300	3.500	108.00	74.00	●
5.400	4.200	116.00	80.00	●
5.500	4.200	116.00	80.00	●
5.550	4.200	116.00	80.00	○
5.750	4.200	116.00	80.00	●
5.800	4.200	116.00	80.00	●
5.850	4.200	116.00	80.00	●
5.900	4.200	116.00	80.00	●
6.000	4.200	116.00	80.00	●
6.100	4.200	124.00	86.00	●
6.200	4.200	124.00	86.00	●
6.250	4.200	124.00	86.00	○
6.300	4.200	124.00	86.00	●
6.400	4.200	124.00	86.00	●
6.500	4.200	124.00	86.00	●
6.700	4.200	124.00	86.00	●
6.800	4.900	133.00	93.00	●
6.850	4.900	133.00	93.00	○
6.900	4.900	133.00	93.00	●
7.000	4.900	133.00	93.00	●
7.150	4.900	133.00	93.00	●
7.200	4.900	133.00	93.00	●
7.250	4.900	133.00	93.00	●
7.500	4.900	133.00	93.00	●
7.600	5.600	142.00	100.00	●
7.800	5.600	142.00	100.00	●
7.950	5.600	142.00	100.00	○



Guhring no.	533
Standard	DIN 344
Tool material	HSS
Surface	
Type	N
Cutting direction	right-hand
Tolerance	h8
Discount group	138
Techn. data page	165

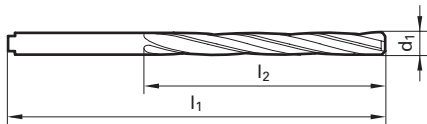


d1	d0 ≥	l1	l2	Availability
mm		mm	mm	
8.000	5.600	142.00	100.00	●
8.050	5.600	142.00	100.00	●
8.100	5.600	142.00	100.00	●
8.150	5.600	142.00	100.00	●
8.200	5.600	142.00	100.00	●
8.250	5.600	142.00	100.00	○
8.300	5.600	142.00	100.00	●
8.400	5.600	142.00	100.00	●
8.500	5.600	142.00	100.00	●
8.600	6.300	151.00	107.00	●
8.700	6.300	151.00	107.00	●
8.800	6.300	151.00	107.00	●
8.850	6.300	151.00	107.00	●
9.000	6.300	151.00	107.00	●
9.100	6.300	151.00	107.00	○
9.200	6.300	151.00	107.00	○
9.300	6.300	151.00	107.00	●
9.400	6.300	151.00	107.00	●
9.500	6.300	151.00	107.00	●
9.650	7.000	162.00	116.00	●
9.750	7.000	162.00	116.00	●
9.800	7.000	162.00	116.00	●
9.900	7.000	162.00	116.00	●
10.000	7.000	162.00	116.00	●
10.100	7.000	162.00	116.00	●
10.200	7.000	162.00	116.00	●
10.300	7.000	162.00	116.00	●
10.500	7.000	162.00	116.00	●
10.600	7.000	162.00	116.00	○
10.700	7.700	173.00	125.00	●
10.750	7.700	173.00	125.00	●
11.000	7.700	173.00	125.00	●
11.250	7.700	173.00	125.00	○
11.300	7.700	173.00	125.00	●
11.750	8.400	184.00	134.00	●
11.800	8.400	184.00	134.00	●
12.000	8.400	184.00	134.00	●
12.100	8.400	184.00	134.00	●
12.200	8.400	184.00	134.00	●

bright
 steam tempered
 nitrided lands
 nitrided
 golden brown
 TiAIN
 TiAIN nanoA
 TiAIN SuperA



Guhring no.	534	634
Standard	DIN 343	
Tool material	HSS	HSCO
Surface	●	●
Type	N	N
Cutting direction	right-hand	right-hand
Tolerance	h8	h8
Discount group	138	138
Techn. data page	165	165

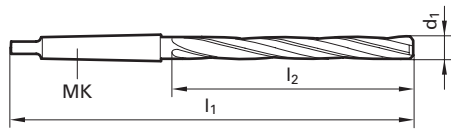


d1	d0 ≥	MK	l1	l2
mm	mm		mm	mm
15.250	11.200	2	218.00	120.00
15.500	11.200	2	218.00	120.00
15.750	11.200	2	218.00	120.00
16.000	11.200	2	218.00	120.00
16.150	11.900	2	223.00	125.00
16.200	11.900	2	223.00	125.00
16.250	11.900	2	223.00	125.00
16.500	11.900	2	223.00	125.00
16.750	11.900	2	223.00	125.00
17.000	11.900	2	223.00	125.00
17.500	12.600	2	228.00	130.00
17.750	12.600	2	228.00	130.00
18.000	12.600	2	228.00	130.00
18.100	13.300	2	233.00	135.00
18.250	13.300	2	233.00	135.00
18.500	13.300	2	233.00	135.00
18.700	13.300	2	233.00	135.00
18.750	13.300	2	233.00	135.00
18.800	13.300	2	233.00	135.00
19.000	13.300	2	233.00	135.00
19.250	14.000	2	238.00	140.00
19.500	14.000	2	238.00	140.00
19.700	14.000	2	238.00	140.00
19.750	14.000	2	238.00	140.00
20.000	14.000	2	238.00	140.00
20.100	14.600	2	243.00	145.00
20.200	14.600	2	243.00	145.00
20.250	14.600	2	243.00	145.00
20.500	14.600	2	243.00	145.00
20.700	14.600	2	243.00	145.00
21.000	14.600	2	243.00	145.00
21.500	15.300	2	248.00	150.00
21.700	15.300	2	248.00	150.00
21.750	15.300	2	248.00	150.00
22.000	15.300	2	248.00	150.00
22.250	15.300	2	248.00	150.00
22.400	15.300	2	248.00	150.00
22.500	16.000	2	253.00	155.00
22.700	16.000	2	253.00	155.00

Availability	
●	
●	
●	●
●	●
●	
●	●
●	○
●	○
●	
●	●
●	
●	
●	
○	
●	
●	
●	●
●	●
●	
●	
●	
●	●
●	
●	
●	○
○	
●	

○ bright
● steam tempered
● nitrided lands
● nitrided
● golden brown
● A TiAlN
● a TiAlN nanoA
● A TiAlN SuperA

Guhring no.	230
Standard	Guhring std.
Discount group	138
Techn. data page	167

General attachments

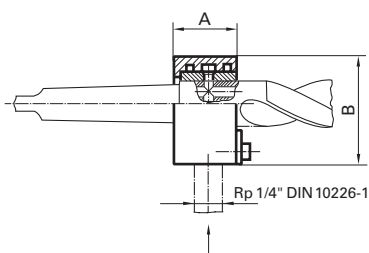

B	A	Code no.
mm	mm	
40.000	28.50	3.001
50.000	29.50	3.002
60.000	29.50	3.003
90.000	40.00	3.004
120.000	40.00	3.005

Availability
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>
<input type="radio"/>



Additional charges for intermediate sizes for high speed steel twist drills

from quantity	gross additional charges per item depending on shank diameter (mm)						
	up to 1.06	1.07 up to 2.12	2.13 up to 8.50	8.51 up to 23.02	23.03 up to 31.75	31.76 up to 50.80	50.81 up to 100.00
5	●	●	●	●	●	●	●
6	●	●	●	●	●	●	●
7	●	●	●	●	●	●	●
8	●	●	●	●	●	●	●
9	●	●	●	●	●	●	●
10	●	●	●	●	●	●	●
11	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●
40	●	●	●	●	●	●	●
50	●	●	●	●	●	●	●
70	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●

Additional charges for intermediate sizes for carbide twist drills

from quantity	gross additional charges per item depending on shank diameter (mm)			
	up to 1.06	1.07 up to 2.12	2.13 up to 8.50	8.51 up to 25.00
3	●	●	●	●
4	●	●	●	●
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
10	●	●	●	●
11	●	●	●	●
15	●	●	●	●
20	●	●	●	●
25	●	●	●	●
30	●	●	●	●
40	●	●	●	●
50	●	●	●	●
75	●	●	●	●
100	●	●	●	●

Additional charges for thinned chisel edge (to DIN 1412. form A)

from quantity	gross additional charges per item depending on shank diameter (mm)		
	2.36 up to 4.25	4.26 up to 8.50	8.51 up to 14.00
5	●	●	●
6	●	●	●
7	●	●	●
8	●	●	●
9	●	●	●
10	●	●	●
11	●	●	●
15	●	●	●
20	●	●	●
25	●	●	●
30	●	●	●
40	●	●	●
50	●	●	●
75	●	●	●
100	●	●	●

○ bright ● steam tempered ● nitrided lands ● nitrided ● golden brown ● TiAlN ● TiAlN nanoA ● TiAlN SuperA



Additional charges for closer diameter tolerance, for h7 straight shank

from quantity	gross additional charges per item depending on shank diameter (mm)							
	1.00 up to 2.12	2.13 up to 4.25	4.26 up to 8.50	8.51 up to 14.00	14.01 up to 23.02	23.03 up to 31.75	31.76 up to 50.80	50.81 up to 60.00
5	●	●	●	●	●	●	●	●
6	●	●	●	●	●	●	●	●
7	●	●	●	●	●	●	●	●
8	●	●	●	●	●	●	●	●
9	●	●	●	●	●	●	●	●
10	●	●	●	●	●	●	●	●
11	●	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●
40	●	●	●	●	●	●	●	●
50	●	●	●	●	●	●	●	●
70	●	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●	●

Additional charges for tangs for straight shank high speed twist drills (tang to DIN 1809)

from quantity	gross additional charges per item depending on shank diameter (mm)			
	tang grinding		tang milling	
	3.01 up to 10.60	10.61 up to 16.00	16.01 up to 23.60	23.61 up to 30.00
5	●	●	●	●
6	●	●	●	●
7	●	●	●	●
8	●	●	●	●
9	●	●	●	●
10	●	●	●	●
11	●	●	●	●
15	●	●	●	●
20	●	●	●	●
25	●	●	●	●
30	●	●	●	●
40	●	●	●	●
50	●	●	●	●
75	●	●	●	●
100	●	●	●	●

Additional charges for tangs for straight shank carbide twist drills (tang to DIN 1809)

from quantity	gross additional charges per item depending on shank diameter (mm)	
	tang grinding	
	3.01 up to 10.60	16.01 up to 16.00
3	●	●
4	●	●
5	●	●
6	●	●
7	●	●
8	●	●
9	●	●
10	●	●
11	●	●
15	●	●
20	●	●
25	●	●
30	●	●
40	●	●
50	●	●
75	●	●
100	●	●

Additional charges for additional marking for all twist drills with a diameter > 4.0 mm

from quantity	gross additional charges per item
5	●
6	●
7	●
8	●
9	●
10	●
11	●
15	●
20	●
25	●
30	●
40	●
50	●
75	●
100	●



Additional charges for grinding of flat to DIN 6535 form HE on straight shank

from quantity	gross additional charges per item depending on shank diameter (mm)							
	6,00	8,00	10,00	12,00	14,00	16,00	18,00	20,00
3	●	●	●	●	●	●	●	●
10	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●
50	●	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●	●

Additional charges for intermediate sizes for high speed steel core drills

from quantity	gross additional charges per item depending on core drill diameter (mm) (calculated on the next size up diameter)
5	●
6	●
7	●
8	●
9	●
10	●
11	●
15	●
20	●

Additional charges for intermediate sizes for carbide core drills

from quantity	gross additional charges per item depending on core drill diameter (mm) (calculated on the next size up diameter)
3	●
4	●
5	●
6	●
7	●
8	●
9	●
10	●
11	●
15	●
20	●



Quality control requirements for twist drills (not micro-precision)

The QS principle encourages requests for inspection records or certificates of conformity to be supplied with ordered tools. We will gladly do this. But as the setting-up of inspection records is particularly time consuming and costly - special

marking on a specified number of tools, the provision of measuring records, the entry of measured data in special forms - and we do not wish to incorporate these costs in our overhead costs, we have chosen to charge the prices below in re-

lation to the quantity ordered. Surely you will appreciate this.

inspected number of items	1	up to 3	up to 5	up to 10	up to 15	up to 20	up to 30	up to 50	up to 100
	net prices for the inspected number of items per inspection criteria								
drill diameter	●	●	●	●	●	●	●	●	●
tapering of diameter	●	●	●	●	●	●	●	●	●
shank diameter	●	●	●	●	●	●	●	●	●
driving tangs, knock-out tangs	●	●	●	●	●	●	●	●	●
taper shank	●	●	●	●	●	●	●	●	●
concentricity tolerance	●	●	●	●	●	●	●	●	●
web thickness	●	●	●	●	●	●	●	●	●
land width	●	●	●	●	●	●	●	●	●
difference in height of cutting edge	●	●	●	●	●	●	●	●	●
total pitch deviation	●	●	●	●	●	●	●	●	●
point angle	●	●	●	●	●	●	●	●	●
side rake angle	●	●	●	●	●	●	●	●	●
clearance angle	●	●	●	●	●	●	●	●	●
point grinds	●	●	●	●	●	●	●	●	●
chisel edge	●	●	●	●	●	●	●	●	●
optical	●	●	●	●	●	●	●	●	●
marking of inspected tools	●	●	●	●	●	●	●	●	●

net prices for the inspected number of items for all inspection criteria									
	●	●	●	●	●	●	●	●	●
plus cost of inspection report									
total price	●	●	●	●	●	●	●	●	●

Quality control requirements for micro-precision drills

inspected number of items	1	up to 3	up to 5	up to 10	up to 15	up to 20	up to 30	up to 50	up to 100
	net prices for the inspected number of items per inspection criteria								
total length	●	●	●	●	●	●	●	●	●
step length	●	●	●	●	●	●	●	●	●
coaxiality	●	●	●	●	●	●	●	●	●
shank diameter	●	●	●	●	●	●	●	●	●
land width	●	●	●	●	●	●	●	●	●
web thickness	●	●	●	●	●	●	●	●	●
point angle	●	●	●	●	●	●	●	●	●
clearance angle	●	●	●	●	●	●	●	●	●
optical	●	●	●	●	●	●	●	●	●
marking of inspected tools	●	●	●	●	●	●	●	●	●

net prices for the inspected number of items for all inspection criteria									
	●	●	●	●	●	●	●	●	●
plus cost of inspection report									
total price	●	●	●	●	●	●	●	●	●

Quality control requirements for step drills

inspected number of items	1	up to 3	up to 5	up to 10	up to 15	up to 20	up to 30	up to 50	up to 100
	inspection criteria	net prices for the inspected number of items per inspection criteria							
total length	●	●	●	●	●	●	●	●	●
step length	●	●	●	●	●	●	●	●	●
drill and step diameter	●	●	●	●	●	●	●	●	●
shank diameter	●	●	●	●	●	●	●	●	●
concentricity tolerance	●	●	●	●	●	●	●	●	●
tapering of diameter	●	●	●	●	●	●	●	●	●
land width	●	●	●	●	●	●	●	●	●
point angle	●	●	●	●	●	●	●	●	●
major angle	●	●	●	●	●	●	●	●	●
clearance angle	●	●	●	●	●	●	●	●	●
point grind	●	●	●	●	●	●	●	●	●
coaxiality	●	●	●	●	●	●	●	●	●
optical	●	●	●	●	●	●	●	●	●
marking of inspected tools	●	●	●	●	●	●	●	●	●

net prices for the inspected number of items for all inspection criteria									
	●	●	●	●	●	●	●	●	●
	plus cost of inspection report								
total price	●	●	●	●	●	●	●	●	●

Quality control requirements for centre drills

inspected number of items	1	up to 3	up to 5	up to 10	up to 15	up to 20	up to 30	up to 50	up to 100
	inspection criteria	net prices for the inspected number of items per inspection criteria							
total length/drill length	●	●	●	●	●	●	●	●	●
shank diameter	●	●	●	●	●	●	●	●	●
drill diameter	●	●	●	●	●	●	●	●	●
chamfer angle/radius	●	●	●	●	●	●	●	●	●
rake angle	●	●	●	●	●	●	●	●	●
clearance angle	●	●	●	●	●	●	●	●	●
optical	●	●	●	●	●	●	●	●	●
marking of inspected tools	●	●	●	●	●	●	●	●	●

net prices for the inspected number of items for all inspection criteria									
	●	●	●	●	●	●	●	●	●
	plus cost of inspection report								
total price	●	●	●	●	●	●	●	●	●



Quality control requirements for core drills


Quality control requirements

inspected number of items	1	up to 3	up to 5	up to 10	up to 15	up to 20	up to 30	up to 50	up to 100	
	net prices for the inspected number of items per inspection criteria									
drill diameter	●	●	●	●	●	●	●	●	●	●
shank diameter	●	●	●	●	●	●	●	●	●	●
taper shank	●	●	●	●	●	●	●	●	●	●
total length/flute length	●	●	●	●	●	●	●	●	●	●
pitch	●	●	●	●	●	●	●	●	●	●
rake angle	●	●	●	●	●	●	●	●	●	●
clearance angle	●	●	●	●	●	●	●	●	●	●
chamfer lead	●	●	●	●	●	●	●	●	●	●
optical	●	●	●	●	●	●	●	●	●	●
marking of inspected tools	●	●	●	●	●	●	●	●	●	●

net prices for the inspected number of items for all inspection criteria										
	●	●	●	●	●	●	●	●	●	●
plus cost of inspection report										
total price	●	●	●	●	●	●	●	●	●	●



GUHRING

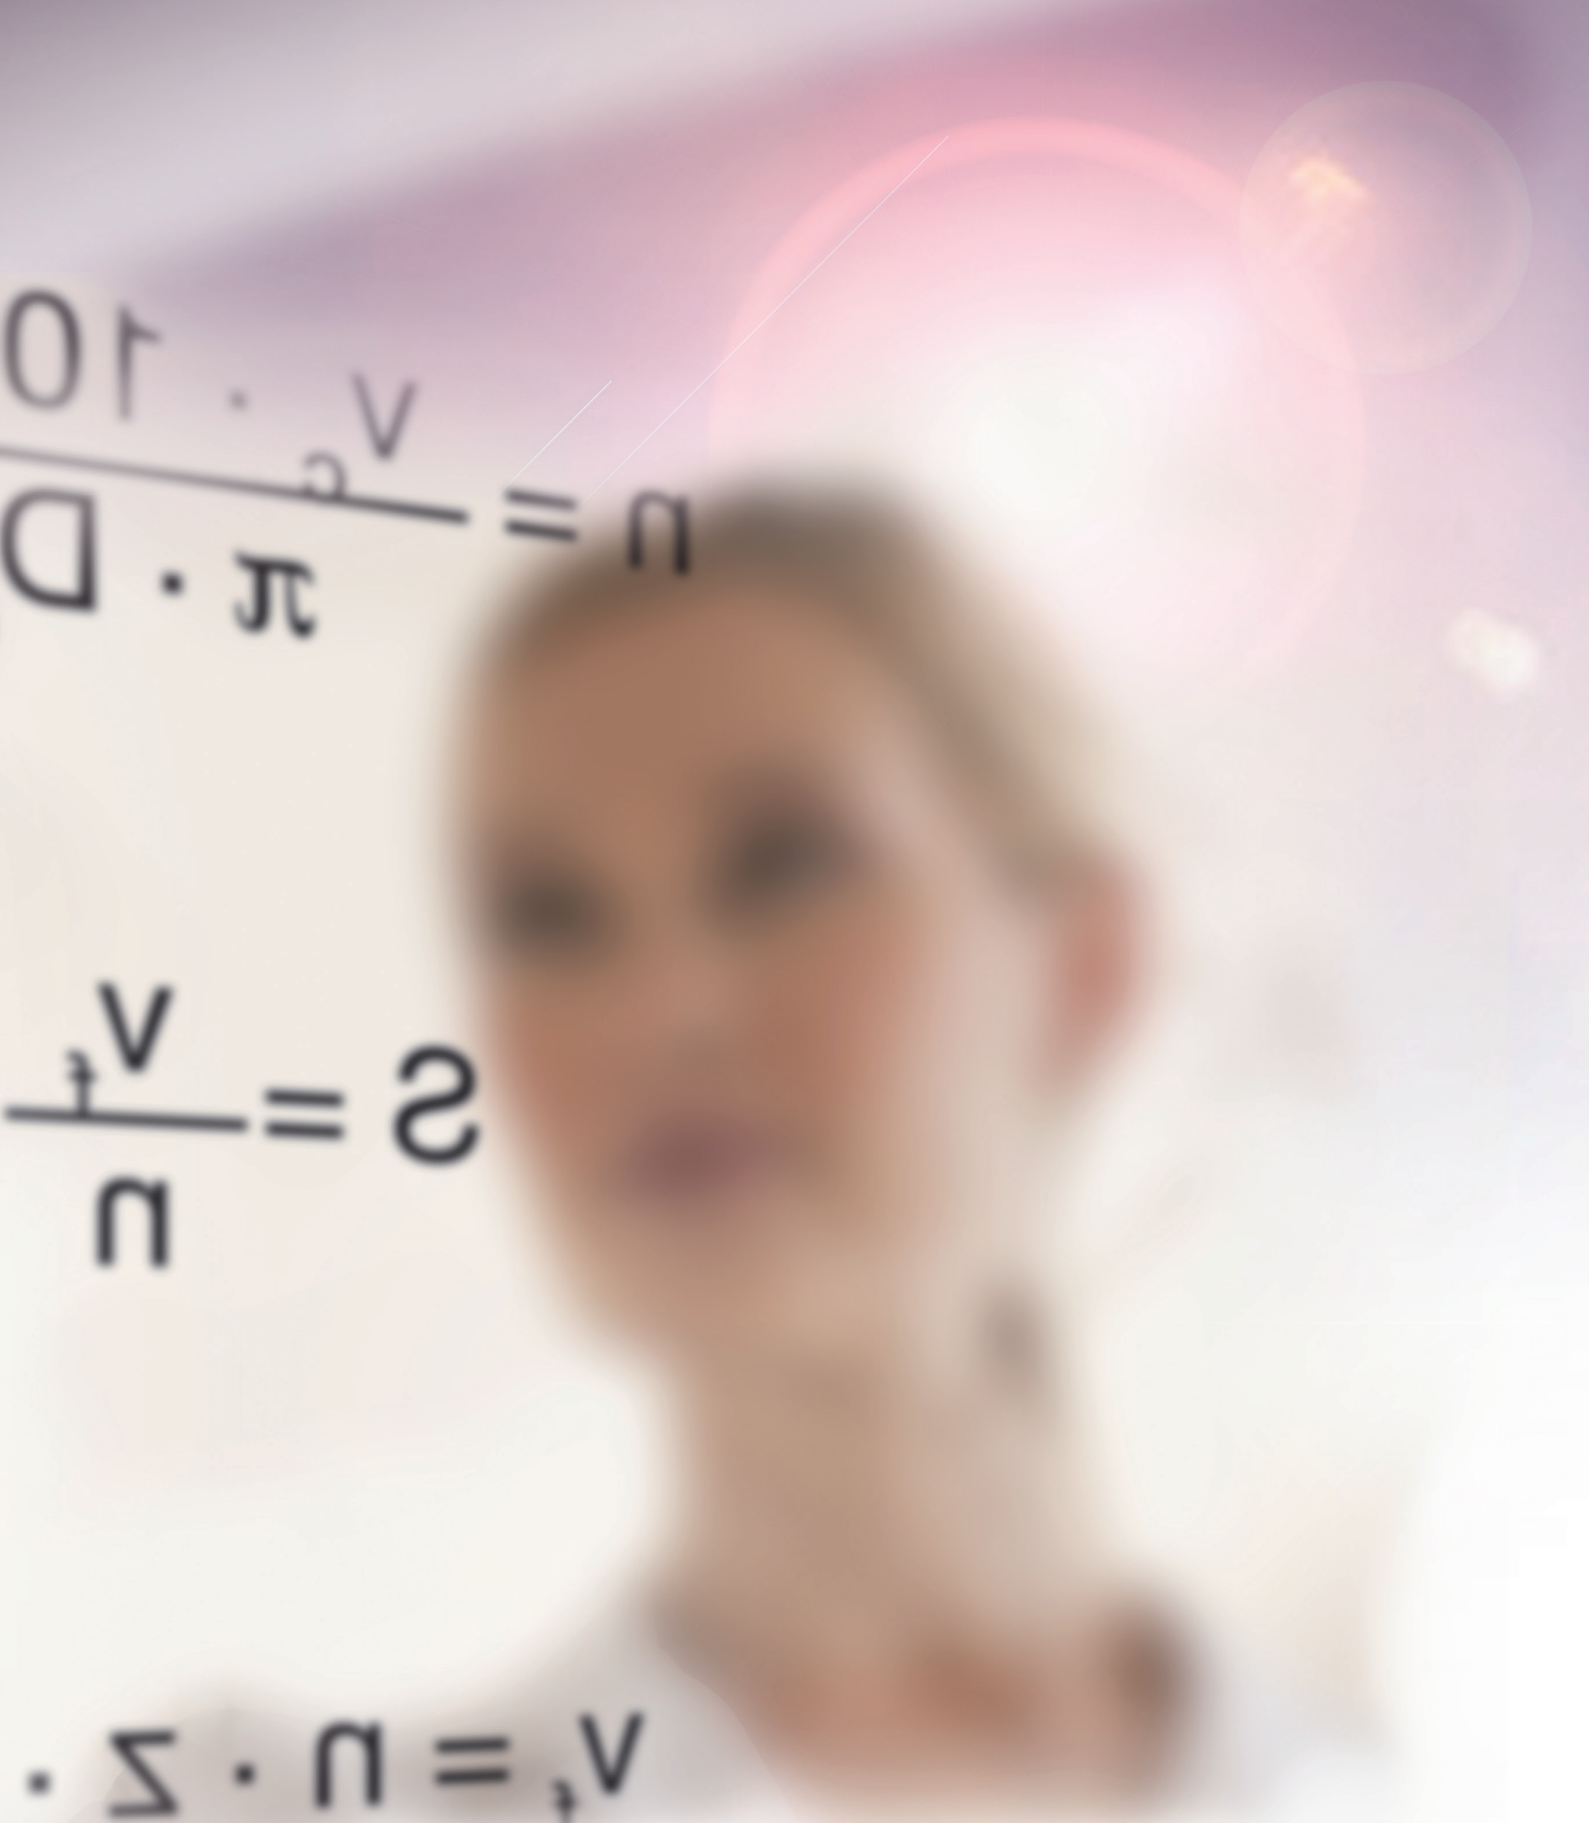

TECHNICAL SECTION

Technical
section

GUHRING



1. General	from page
Guhring tool materials	625
Surface finishes, coatings	629
Machining technology	631
Shank designs	637
Conversion table inch-millimetre	640
Materials	641
2. Twist drills	
General information	642
Dimensions	644
Ratio drills	653
Hole quality characteristics	654
Centre drills	655



High speed steels

Only high quality tool materials are used to produce HSS tools. Systematic selection of alloying elements ensure the tool possesses the optimal characteristics for the individual tasks.

Tungsten, Molybdenum: increase tempering- and wear-resistance

Vanadium: increases wear-resistance of finishing tools

Cobalt: enables increased hardening temperatures and improves heat-resistance.

Guhring description	German steel descript.	Material no. (steel code)	Range of application	comparable steels					
				USA	France	Italy	Great Britain	China	Japan
HSS	HS 6-5-2 (DMo5)	1.3343	standard tool material for most common applications	M 2	Z 90 WDCV 06-05-04-02	HS 6-5-2	BM 2	W6Mo5 Cr4V2	SKH51
HSCO HSS-E	HS 6-5-2-5 (EMo5Co5)	1.3243	high heat-resistance, especially suited for roughing or when coolant insufficient	M 35	Z 90 WDKCV 06-05-05-04-02	HS 6-5-2-5	BM 35	W6Mo5 Cr4V2Co5	SKH55
HSS-E	HS 6-5-3 (EMo5V3)	1.3344	high friction resistance and cutting edge stability, especially important for reaming operations	M 3	Z 120 WDCV 06-05-04-03	HS 6-5-3	-	W6Mo5 Cr4V3	SKH52
M42	HS 2-9-1-8	1.3247	increased heat resistance and hardness, suitable for difficult-to-machine materials	M 42	Z 110 DKCWV 09-08-04-02-01	HS 2-9-1-8	BM 42	W2Mo9Cr4 VCo8	SKH59
HSS-E									
HSS-E-PM	10-2-5-8 PM52	1.3253	high hardness, heat-resistance and cutting edge stability, very dense structure	-					
	HS 6-5-3-8 PM30	1.3294							



Basic characteristics of carbide

Carbide

Carbide, similar to steel, is a less than precise and indeed a very general term for an entire material group. Carbide can be produced in an infinite number of variations with different characteristics through the combination of at least two basic constituents.

Carbide production

Carbide consists of a hardness carrier – tungsten carbide plus maybe one or more carbides – and an extremely tough component: Cobalt (Co). Cobalt basically serves as a cementing or binding agent in which the carbide particles are distributed.

In order to satisfy the diverse demands that, dependent on the individual application task, are placed on carbide, Gühring offers a choice of more than 20 different standard carbide types. Some are especially hard, others possess a very high toughness, some are ultra fine grain and others are coarse. Furthermore, on the request of the customer, any conceivable carbide grade can be developed and produced as a special carbide, so-to-speak.

Our carbide division has a state-of-the-art laboratory at its disposal to ensure our carbide always corresponds with customer requirements. From the raw material to the finished product, samples are continuously examined in order to guarantee and document the highest quality and process reliability in accordance with the certification.

For drilling applications the following characteristics are of importance:

Rigidity


Rigidity is a measure of the energy that is required to force a material to deform elastically. With carbide it is determined by the cobalt content. The higher the cobalt content, the lower the rigidity of the material.

The rigidity of conventional carbide is more than double compared to that of steel. Subsequently, holes of considerably greater straightness can be produced with carbide drills than with steel drills. However, this positive effect of the rigidity is limited because of deformation forced upon the drill – for example through offset or imbalance – result in a heavy increase in load on the material. Therefore, more rigid materials are also more prone to breakage.

Hardness

Hardness is described as the resistance of a material against penetration of another. It is clear, that the tool material must be considerably harder than that of the workpiece, in order to not be exposed to excessive wear.

There are several possibilities to adjust the hardness of carbide: on the one hand by modifying the cobalt content and on the other hand by varying the carbide grain size. If the cobalt content is increased whilst retaining the same grain size, the hardness of the carbide is reduced. However, if the grain size is reduced whilst retaining the same cobalt content, the hardness is increased.

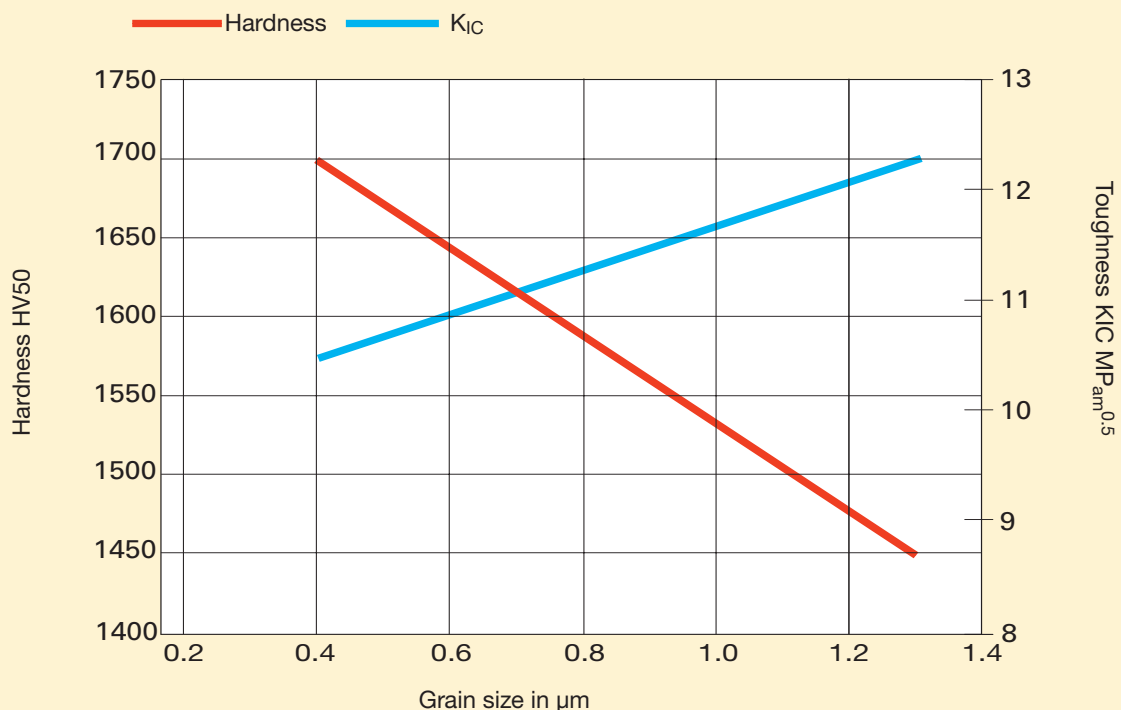



Basic characteristics of carbide

Toughness

Toughness is defined as the resistance the material offers against the growth of a fissure. A high fissure resistance is an indication of “good-natured” carbide, possessing high impact resistance. Unfortunately, hardness and toughness are opposing attributes.

High cobalt content and/or coarse hard material grains are an indication of tough carbide. High toughness is required when a sudden or high cutting load occurs during the machining process. A high cutting load arises when there is a high friction coefficient between tool and workpiece. The coefficient of friction is determined by the surface roughness of the tool and by the chemical relationship between the tool surface and the workpiece.

Please note, toughness is not synonymous with high bending strength. An important and specific characteristic for determining the bending strength is the cutting edge stability.

Cutting edge stability

Cutting edge stability is defined as the resistance of the cutting edge against the breakaway of individual hard material grains or larger grain formations. The bending strength provides a rough measure of the cutting edge stability. In addition to toughness, the size of the longest grain boundary within the structure of the material is also of importance for the bending strength. Subsequently, high toughness increases the bending strength, however, longer grain boundaries (= coarser grains) lowers it.

Reaction

Although today most carbide tools are coated, the reaction tendency between carbide and workpiece must be taken into consideration. Because of rapid wear of the coating at the cutting edge, a reaction between tool and workpiece is indeed a possibility.

Similar to pitting in the corrosion process, a localised attack can have a considerably longer lasting effect than any damage over a large area. Due to the high temperature development at the cutting edge, cobalt in particular reacts very quickly with ferrous metals. Other metals, such as titanium or silicon are prone to react with tungsten carbide. For these reasons, the cobalt content is of interest regarding the reaction of the tool.

Material selection

Dependent on the specific application task, the various attributes must, therefore, be carefully balanced. Subsequently, there are various carbides available. In order to find the correct carbide for a specific application task, several classification systems were experimented with and introduced as standard to simplify the selection. Widely accepted is the DIN ISO classification system to DIN ISO 513, revised in 2005.

Here, the application range of the carbide/coating combination is indicated by an identification letter, the hardness/toughness ratio by an index number. A low index number indicates a high hardness requirement for the application, a high number a high toughness requirement.



The most important carbide grades for Gühring tools

Main material group P

This group includes long-chipping ferrous metals except stainless and austenitic steels and is, according to the cutting load, divided into the application groups 01-50.

Main material group M

Group M includes austenitic stainless steels, austenitic/ferritic steels and cast steels. The group is subdivided into the application groups 01-40, dependent on the cutting load. At Gühring, P and M applications are achieved with coated K carbide.

Main material group K

Group K incorporates all forms of grey cast iron and malleable cast iron. Dependent on cutting load it is subdivided into the application groups 01-40.

Main material group S

Heat-resistant "super alloys" based on iron, nickel or cobalt as well as titanium alloys are included in group S. It is divided into the application groups 01-30, dependent on the cutting load.

Main material group N

This group includes non-ferrous metals, especially aluminium-alloys and non-metal materials. It is, depending on the cutting load, divided into the application groups 01-30.

Main material group H

This group includes hard machining of hardened steels. The application groups are from 01-30, depending on the cutting load.

Many carbide grades cover the broad spectrum of the main material groups, especially when coated tools are applied. For example, most of the FIRE-coated carbide drills in the Gühring range are assigned to the main material groups K and P.

Individual Gühring grades

The following table lists the most important carbides that are available from Gühring ex-stock for general applications. Further carbide grades are available on request and detailed information can be found at www.guehring-carbide.de

In more than 80% of applications known to Gühring, the results of DK460UF carbide grade tools together with a specially adapted coating could not be surpassed by any other carbide grades, including coated tools. This and the availability of the material ex-stock simplify tool selection immensely. For further information regarding the application of other carbide grades please contact our technical engineers.

Gühring description	Co-content [M-%]	Tungsten carbide grain size [µm]	Hardness [HV]	ISO classification [ISO 513]	Characteristics
DK460UF	10	0.5	1620	K20-K40 coated: P, M20-M40, H, S, N25	A carbide grade with wide range of application possibilities. It is applied, mostly coated, for the machining of steel, soft Al alloys, cast iron as well as "super alloys" such as Inconel 718. This grade is the backbone of our carbide production.
DK500UF	12	0.5	1680	K25 coated: P, M, H, S, N25	The grade has been especially developed for hard machining. It possesses a higher hardness and deformation tolerance in comparison to DK460UF. Due to the high Co-content, a coated application is strongly recommended.
DK255F	8	0.7	1720	K20 coated: P, M, H, S, N20	The grade is recommended for hard machining, the machining of high tensile grey cast iron and hard AlSi-alloys. Dry machining is possible. A coated application is preferable.
DK120	6	1.3	1620	K15 coated: N15	The grade is especially suitable for the application with diamond coating.
DK120UF	7	0.5	1850	K05	Ultra fine grain type offering extreme wear resistance, suitable for absolutely rigid machines, preferred for reamers.
K55SF	9	0.2 -0.5	1920	K10-K30	For application with high wear resistant materials, stainless steels, composite materials such as Kevlar and GRP, high speed machining and dry machining.
DK400N	10	0.7	1580	K35M coated: P, M, S, N35M	An extremely tough grade for the machining of high heat resistant metals.



Basic properties

○ bright

High speed steel or carbide tools generally offer good basic properties even without surface refinement or coating. In addition, bright tools from Guhring's standard range serve as base tools for a cost-efficient coating with all Guhring coatings to customer specification

● steam nitrided

◐ nitrided lands

This finish is recommended for the machining of grey cast iron, aluminium with a high silicon content, plastics, steels with a high perlite content etc. Our tools are nitrided using different application orientated processes.

Surface refining processes

For special application cases a surface refinement is recommended that improves the wear-resistance as well as the gliding properties and decreases the welding tendency. Because hard or soft material coatings provide much better results surface refinement is increasingly losing importance.

◑ steam tempered

Steam tempered tools can prevent cold welding that can occur when machining low-carbon steels. However, they are only suitable for the machining of ferrous materials.

Guhring coatings

	TiAlN A	TiAlN Super A/nanoA A a	TiCN C	Carbo Cb	Cristall D
Colour	violet	grey-violet	grey violet	black	anthrazite
hardness	3200 HV	3400 HV	3000 HV	> 6000 HV	> 8000 HV
Friction coefficient	0.55	0.6	0.4	< 0.1	< 0.1
max. application temperature	< 800°	< 900°	< 400°	< 700°	< 700°
Thermal expansion	7.2 * 10 ⁻⁶ /K	6.9 * 10 ⁻⁶ /K	-	3 * 10 ⁻⁶ /K	1.1 * 10 ⁻⁶ /K
Brief description	Hard coating for abrasive applications, HPC and MQL	Hard coating for difficult and hard machining, HPC as well as MQL	Tough hard coating	Extremely hard coating	Extremely hard diamond coating

Special coatings

	FIRE/nano-FIRE F	AlCrN P	TiN·TiN+ S S+	Signum Y	ICE
Colour	violet	grey-blue	golden yellow	bronze-red	grey metallic
hardness	3300 HV	3200 HV	2300 HV	5500 HV	3500 HV
Friction coefficient	0.6	0.35	0.5	0.55	0.6
max. application temperature	< 800°	< 1100°	< 600°	< 800°	< 1000°
Thermal expansion	-	6.4 * 10 ⁻⁶ /K	9.3 * 10 ⁻⁶ /K	7.5 * 10 ⁻⁶ /K	-
Brief description	Wear-resistant multi-layer coating, also for MQL	Wear-resistant coating with high oxidation resistance and temperature hardness	Cost-efficient standard coating	Extremely hard, heat-resistant multi-layer coating	Hard, high heat-resistant coating

General



Application recommendations

	Drilling			Milling			Tapping			Thread milling		Fluteless tapping			Reaming		
	Carbide		HSS	Carbide		HSS	Carbide		HSS	Carbide		Carbide		HSS	Carbide		HSS
	conv.	MLQ		conv.	MLQ		conv.	MLQ		conv.	MLQ	conv.	MLQ		conv.	MLQ	
Steel unalloyed	F	F	F	F	F	F	C	S	C	C	A	C	S	C	A	A	S
	A	A	S	a	a	C	S		S	A		S		S			P
	Y	Y		A	A				A					P			
Steel alloyed	F	F	F	F	F	F	C	S	C	C	A	C	C	C	A		S
	A	A	S	a	a	C	S		A	A		S	S	S			P
	Y	Y		Y	Y				S					P			
Steel hardened <55-HRc	F	F		Y	Y		A	A	C	C	A	C	C	C	A	A	
	A	A		A	A		A	A		A		S	S	S			P
	Y			A	A		C							P			
Steel hardened 55-65-HRc	A	F		Y	Y		A			A					A		
	F	Y		A	A												
	Y																
Steel rust and acid-resistant	a	a	F	a	a	F	A	A	C	C	A	C		C	A	A	S
	F	F	S	F	F	S	A	A	S	A		S		P			
	Y	Y		Y	Y		C							S			
Cast iron	Y	Y	F	Y	Y	F	a	a	A	A	A	C		P	A		S
	F	F		F	F	C	A		C			S		C			
	A	A							S					S			
Aluminium wrought alloys	○	○	○	○	○	○	Cb	Cb	○	○	○	Cb		Cb	Cb		
	Cb	Cb	Cb	Cb	Cb	Cb	○		Cb			C					
	D	D		D	D												
Aluminium cast alloys	○	○	○	○	○	○	○	Cb	○	○	○	Cb		Cb	Cb		
	D	D	Cb	Cb	D	Cb	Cb		Cb								
	Cb	Cb		D	Cb												
Nickel alloys	a	a	F	a	a	F			A	C	A	C		P	A		S
	F	F		F	F				C	A				C			
Titanium	a	a		a		F			A	C	A	C		C	A		S
	F			F					C	A							
Copper	ICE	ICE	S	ICE	ICE	S	ICE	ICE	○	○		ICE	ICE	S	A		S
Bronze/brass	ICE	ICE	S	ICE	ICE	S	ICE	ICE	○			ICE	ICE	S	A		S
Cobalt-chromium Alloys	a	a		a	a										A		S
	F	F		Y	Y												
				F	F												
Precious metals	a	a		a	a										A	A	S
Ceramics, pre-sintered	D	D		D	D												
fibre-reinforced Plastics	D	D		D	D												
	Y	Y		Y	Y												

The order in the material groups shows our application recommendation from top to bottom. The optimum suitability for each specific material in your application can only be determined in machining trials.



Dry machining and minimal quantity lubrication (MQL)

Dry machining and minimal quantity lubrication (MQL) are important current technologies with the aim of reducing production costs. Guhring has invested heavily in these technologies and developed tools as well as tool holders with optimal geometries for this type of machining. An observation of the thermal conditions at the tool and the workpiece was therefore extremely important.


Basic observations

Because with dry and MQL machining, any generated heat is not dissipated via coolant like with conventional wet machining, the design of the optimised tool must ensure that

- heat generation is minimised during the machining process (i.e. through sharp cutting edges and a positive rake angle whilst increasing the cutting parameters),
- friction is minimised (i.e. through a width reduction of the leading margins in comparison to the wet tool and increasing the back taper of the tool),
- heat transfer between chip and tool is reduced (i.e. through heat insulating hard coatings and polished tool surfaces to reduce the friction between chip and face),
- heat transfer between chip and workpiece is reduced (i.e. through improved chip evacuation from the hole or from the workpiece surface respectively).

Influence of rake angle on temperature

To examine this parameter, Guhring produced three drilling test tools in 10 mm diameter for a drilling depth of 100 mm. The tools were geometrically the same, however, the tools had different spirals and subsequently different rake angles. The test tools had 0° (i.e. straight-fluted), 15° and 30° rake angles. The internal coolant duct diameter of the tools was identical.

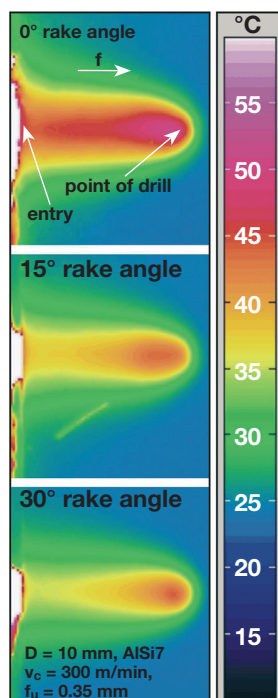

Using a thermal imaging camera, the heat generated during the machining of a hole in Al-alloy AISi7 was taken in real time and documented. The sheets applied for the test had a thickness of 14.00 mm and were drilled on the face so that the remaining residual wall between the hole and thermographic examination of the sheet surface was 2.00 mm. Using the above test layout it was possible to make a qualitative analysis of the heat generated by the individual tools.

The thermal imaging of the tool point show a clear connection between the rake angle and the heat generated. A positive rake

angle resulted in a clearly lower temperature being generated in the shear zone of the chip, because with a tool with a 30° helix the chip only requires deflecting by 60° (reduced shearing action), whilst the chip deflection for a straight-fluted tool is 90° (increased shearing action).

The heat generated in the shear zone directly enters the process as cutting heat. A shorter chip transfers less frictional heat to the tool due to a smaller contact area on the flute surface resulting in improved temperature conditions

In addition, the chipflow was recorded using a high-speed camera. With the cutting parameters v_c = 300 m/min and f = 0.35 mm/rev., distinct differences were apparent regarding the chip evacuation and the process heat. Chip evacuation, i.e. the continuous transportation of chips from the hole, improved when the helix angle of the tool was increased.

This is primarily due to a positive geometry and the resulting improved chip fracture, providing a shorter shearing chip that, due to its improved surface-volume-relationship, can be evacuated from the hole with greater ease and is less prone to jamming in the flute.

Thanks to considerably improved chip evacuation and comparatively lower process temperatures, spiral-fluted tools play an important role in the increased process reliability in dry machining and MQL applications.


However, the application of straight-fluted drills can be of advantage for the machining of aluminium and cast iron materials, where the demand for hole quality (improved roundness and reduced run-out) is high. This is because straight-fluted tools generally possess four leading margins. In addition, the temperature profile of straight-fluted drilling tools can be reduced by an optimised, geometric design of the coolant ducts to an extent that the thermal disadvantage in comparison to spiral drilling tools is compensated to a large degree.



Dry machining and minimal quantity lubrication (MQL)

Influence of friction on the process temperature

In an additional, three-part test, holes were produced in spheroidal graphite iron GGG40. An identical test tool was applied for completely dry machining, MQL machining and machining with air cooling.




The test tool was a diameter 8.5 mm drill, optimised for MQL. The drilling depth was 42.00 mm. The cutting rates were $v_c = 130$ m/min and $f = 0.26$ mm/rev.

A thermo-graphic camera recorded the temperature at the point during the return stroke from the hole. A machining sequence of seven consecutive drilling operations was recorded for this purpose. From the first to the fifth hole a temperature increase at the point was recorded, however, following the fifth hole the maximum temperature at the point during the withdrawal process did not change (quasi stationary condition). For this reason the temperature of the drill was always recorded following the seventh hole.

Consequently, this temperature is lower than that occurring at the point of the drill during the cutting process. Measuring with thermal elements below the face and just behind the cutting lip have shown that temperatures up to 900° C can occur in this area. However, the temperature comparison carried out in this test is admissible because the measurement was always taken at the same point in time.


During a completely dry application, the temperature at the point of the drill reached a maximum 431° C. This temperature does not pose a particular problem for modern tool materials and hard coatings, even a completely dry application offers process reliability.

WITHOUT




However, the diffusion and adhesion wear mechanisms both accelerate at higher temperature levels, which in turn reduces tool life. Furthermore, an increased level of heat can lead to a thermal expansion of the workpiece, that in turn can jeopardise the close tolerance dimensions if the suitability of the machining strategy is not observed. In addition, with steel machining it can come to fringe zone hardening of the hole wall, making follow-up operations such as tapping or reaming more difficult.

AIR



In the second test, the heat measured at the point of the drill with internal air cooling was 196° C, evidence that the flow of air dissipates a considerable amount of the generated heat. In addition, chip evacuation was considerably improved, confirming that in contrast to completely dry machining the spiral flute of a drilling tool alone is not sufficient for an optimal chip evacuation.

MQL



Under similar test conditions, the heat measured at the point of the drill applied with MQL, i.e. air mixed with small quantities of oil, was only 145° C. An oil volume of only 30 ml/h could not be regarded a major contributing factor in the cooling process, therefore, it must be presumed that the small quantities of oil mixed with air caused a considerable reduction in friction. It also confirms, in contrast to pure air cooling, a further increase in speed of chip evacuation. The lower chip temperature, in comparison to pure air cooling, is further clear evidence of oil reaching the effective area and improving chip evacuation from the face thanks to improved friction characteristics.

Dry machining

Dry machining dispenses with the use of coolant entirely resulting in savings in various areas. For example, less expensive tools without internal coolant ducts can be applied. Furthermore, machines and tool holders suffice without elaborate coolant delivery techniques and obviously there are no longer the costs of coolant and their disposal. Coolant does not have to be removed from components and the surrounding machine area.

Without lubrication, the heat generated during the machining process must be kept to a minimum and dissipated solely via the chip. Otherwise, tool and workpiece are exposed to excessive heat, resulting in increased wear to the tool and hardening of the hole surface in the workpiece. Suitable coatings can prevent overheating of the tool. However, excessive heat to the workpiece can only be achieved by a good chip evacuation, whereby the tool geometry also plays an important role. Short chips, large flutes with polished surfaces – possibly MolyGlide-coated – can provide the solution.



Dry machining and minimal quantity lubrication (MQL)

In a few dry machining applications, air is used for cooling. Obviously, tools with coolant ducts are applied, through which air is delivered to the hole. Air not only cools tool and workpiece, but under the correct pressure also improves chip evacuation.

Interestingly, dry and HSC machining do not exclude one another, as one would expect. On the contrary, modern carbide drills and coatings allow so-called dry HSC – dry high speed machining, combining the advantages of the two machining trends, as for example, a reduction in production costs in certain applications.

To optimise drills for the MQL technology, Guhring is increasingly applying the Finite-Element-Method (FEM). FEM allows the dimensioning and optimisation of the tools during the design phase. The flute in the area directly behind the cutting edge has the task to mould the chip in order to break it as small as possible. In the rear area its task is to evacuate the chip as quickly as possible. These tasks apply to wet machining, minimal quantity lubrication as well as dry machining. With minimal quantity lubrication and dry machining, however, it is extremely important to provide the chip with minimal frictional resistance in the rear area, in order to ensure a problem-free chip evacuation. This is aided by an optimised flute form as well as a specially polished flute surface.

Minimal quantity lubrication MQL


MQL or minimal quantity lubrication works with an air-lubricant-mixture, that only contains a small part of lubricant.

In the past, the technology of minimal quantity lubrication was generally applied on the own initiative of the user, in order to reduce costs. Often, tools for wet machining were simply applied under MQL conditions. With this approach, the limits of the tools' efficiency were reached very quickly and it became clear that a mere substitution of the lubricant was not a targeted approach.

A professional approach during the design of MQL suitable tools nowadays allows considerable performance increases whilst maintaining process reliability. Hereby, all the drill's relevant attributes for providing efficiency and process reliability, from the cutting edge to the flute as well as the shank end, are adapted to satisfy the special demands of MQL. As well as the choice of carbide, this also includes the special tool geometry, the tool coating and the design of the shank end for MQL drills.

Flute design to suit MQL

With the assistance of the aforementioned FEM-analysis, it is possible to simulate the flow resistance of a flute with chip, subsequently providing optimised flute forms for different material classes. The following image shows a flow optimised flute form and point design, providing optimal chip flow and also minimising the thermal load of the cutting edge thanks to an optimised throughflow of the point area and the flute by the MQL aerosol.

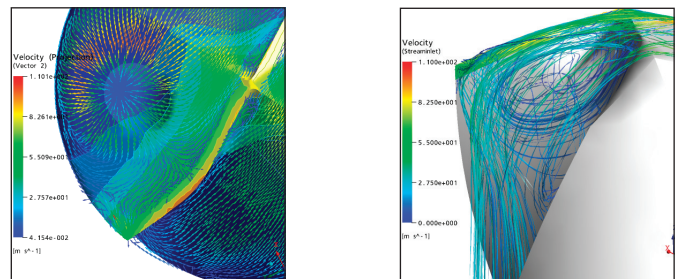

In addition, improved chip evacuation and therefore increased process reliability is provided by a MQL-suitable coating. Guhring has developed a double coating, consisting of a hard coating with an additional soft coating, MolyGlide. Tests confirm a considerably higher chip evacuation speed for the MQL tool with the above coating in comparison with conventional tools.

Coolant delivery to suit MQL

Because an extremely low volume of lubricant is applied with minimal quantity lubrication, the delivery of these low coolant quantities to the effective area is of utmost importance. Hereby, the geometric design of the shank end is of main significance for a safe delivery of the lubricant.



Dry machining and minimal quantity lubrication (MQL)

In order to satisfy the demand for more efficiency and process reliability with MQL drilling operations, Guhring has examined the design of the shank end and subsequently the coolant delivery in great detail.

Due to the low volumes of coolant involved, it is important that four basic demands are met in the design stage.

- minimal dead areas that could lead to consolidation of coolant
- sealed coolant transfer surface between shank end and delivery screw preventing the escape of coolant in the clamping area of the chuck or in the internal areas of HSK (preventing swarf deposits that could lead to concentricity errors following the next tool change).
- simple handling
- cost-effective production

The technologies applied in the design solution of a MQL suitable shank end are based on spray tests as well as computer based simulation programs. CAD-CFD combination has proved to be an especially effective technology. CFD (Computational Fluid Dynamics) assists in determining flow fields. The final choice of suitable shank end is confirmed by spray tests.

In intermittent spray tests the different shank ends were examined regarding coolant consolidation in the clamping area of the tool shank and inside the HSK. A test period of one hour with intervals of 5 seconds spraying with a spindle speed of 10,000 rev./min and 2 seconds dry running with a stationary spindle provided the following results for the four examined shank ends:

- re.: 1. and 2.: Heavy oil contamination in clamping area and inside HSK.
- re.: 3. and 4.: No oil contamination in clamping area and inside HSK


The conical shank end and the shank end with labyrinth seal proved to possess optimal sealing characteristics.

In a second test, the various shank ends were examined regarding response time and the conveyed volume accuracy of the transferred cooling agent. A slotted pipe was fitted at an angle into the working area of the machine tool. The tool was inserted into the slot. During a Z/Y travel sequence the MQL delivery was switched on and off. The internal area of the pipe was fitted with blotting paper to collect the flow of coolant. The blotting paper was then removed to examine the spray pattern.



Via CAD-CFD and spray tests Guhring has examined four different shank ends and the corresponding adjustment screws regarding their efficiency:

1. Plain shank end without groove with plain screw (left)
2. Plain shank end with sickle-shaped groove to connect the two coolant ducts with plain screw (second from left).
3. Conical shank end with circular groove and taper screw (second from right)
4. Recessed shank end (labyrinth seal) without connection groove with corresponding screw (including indexing facility for orientation of coolant ducts, right)

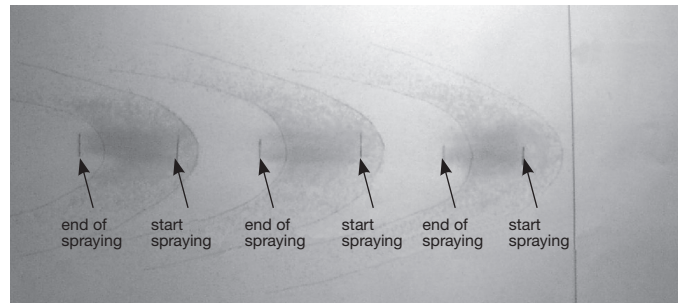

Layed flat, the blotting paper shows a geometry dependent parabolic spray pattern. By analysing the spray pattern at the beginning and at the end of the test whilst simultaneously observing the axis stabilisation signal for the machine tool axes it is possible to calculate the reaction time of the various shank end design solutions.

There are clear differences dependent on the shank end design. Furthermore, through the spray volume shown in a broader spray pattern, it is possible to deduce the conveyed volume during the spray period.

By the way, with Guhring's new measuring instrument MQL-Check 3000 it is possible to evaluate the MQL aerosol flow characteristics of tools quantitatively and time-resolved. The measuring instrument provides the user with reliable data to adapt the air pressure and the lubricant content of the MQL aerosol to the process.




The Guhring MQL system

Both findings (spray pattern and reaction time) show the conical shank end and the shank end with labyrinth seal to be superior to those with plain shank end. Subsequently, only the conical shank end and the shank end with labyrinth seal were deemed suitable for further examination and optimisation.

Because a vector analysis is carried out for the flow, it is possible to analyse the flow pattern according to the direction of flow. Hereby, the speed vectors are examined for forward and reverse flow. Any turbulence formation has a forward and reverse flow. Often, turbulence occurs in dead areas. At this point totally opposing statements can be made for single and two coolant duct systems.


With the assistance of a CFD analysis, the form and size of the connection slot at the shank end were examined. The picture on the left shows the flow profile within the connection shank end – adjustment screw for a conical shank end. Various slot forms were analysed.

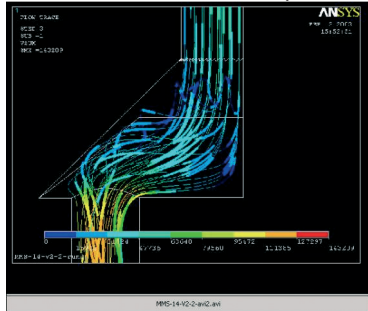

end – adjustment screw for a conical shank end. Various slot forms were analysed.

Whilst dead areas in single coolant duct systems lead the medium to be deposited on the wall and separating thanks to the flow speed within the turbulence, dead areas in two coolant duct systems are areas requiring to be filled before the medium can continue. Based on the produced flow patterns, conical shank end B with wide connection slot and rounded base proved to be the optimal solution.

An analysis of the two requirements “simple handling” and “cost-effective production” painted a similar picture. The following table shows the respective evaluation, whereby the data refers to the shank end and the corresponding screw. Relevant features for process reliability, such as “minimal dead areas” and being “leakproof” provide criteria for excluding the two versions with plain shank ends. Subsequently, the most favoured shank end is the one with a conical end and a wide slot with rounded base.

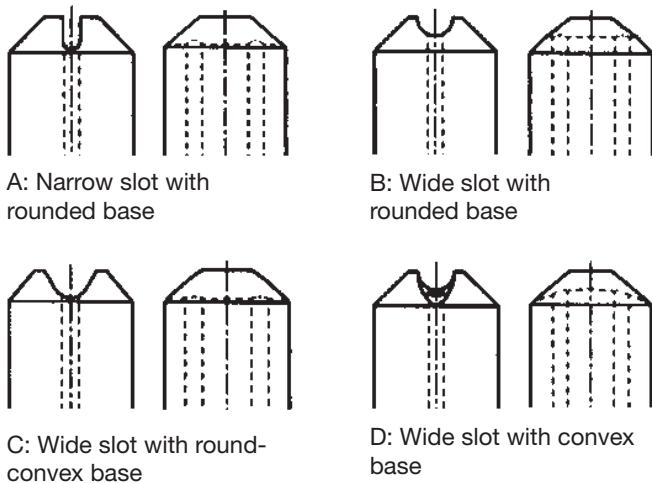

Spray patterns were also produced for the above slot forms, showing a tendency to solution B. However, the variations were marginal but the CFD analysis showed a clearer picture.

Shank end	Handling	Cost-effective production	Minimal dead areas geom. analysis	Leak-proof
Plain w/o slot	++	++	-	-
Plain w. sickle-shaped slot	++	+	-	-
Conical with slot	++	+	+	++
Recessed end with labyrinth seal	-	-	++	++

++ = very good properties, + = good properties, - = poor properties




The Guhring MQL system

A further decisive criteria for the process reliability of MQL tools is a problem-free system assembly. Guhring's solution is a recently developed MQL delivery system consisting of a one-piece delivery pipe with a thin-walled stainless steel pipe glued inside and a MQL adjustment screw.

The MQL pipe installed in conventional MQL systems is not optimally suited for a process reliable installation due to its high flexibility and its low thermal resistance. Therefore, Guhring uses a stainless steel pipe, eliminating the disadvantages mentioned above. Its large internal diameter also ensures improved flow conditions. The necessary radial flexibility of the coolant delivery pipe installed in the chuck is ensured because it is not glued along its entire length, only a few millimetres of its axial length at the base. Following the glued area, the bore is enlarged so that the coolant delivery pipe has radial flexibility. In addition, Guhring's MQL system provides access and also its axial adjustment at the shank end via hexagon screw.

Guhring has perfected every proposed design feature for an optimum MQL delivery including the design of MQL specific tools for its entire program ensuring the possibility of process reliable MQL operations with solid carbide tools. In addition, our GM300 program includes tool holders, clamping systems and accessories that are specifically designed to satisfy the requirements of MQL machining. Furthermore, our entire MQL system was completed by a two channel MQL version in manual and automatic construction, see MQL system summary in the chapter „Modular Tooling Systems“.

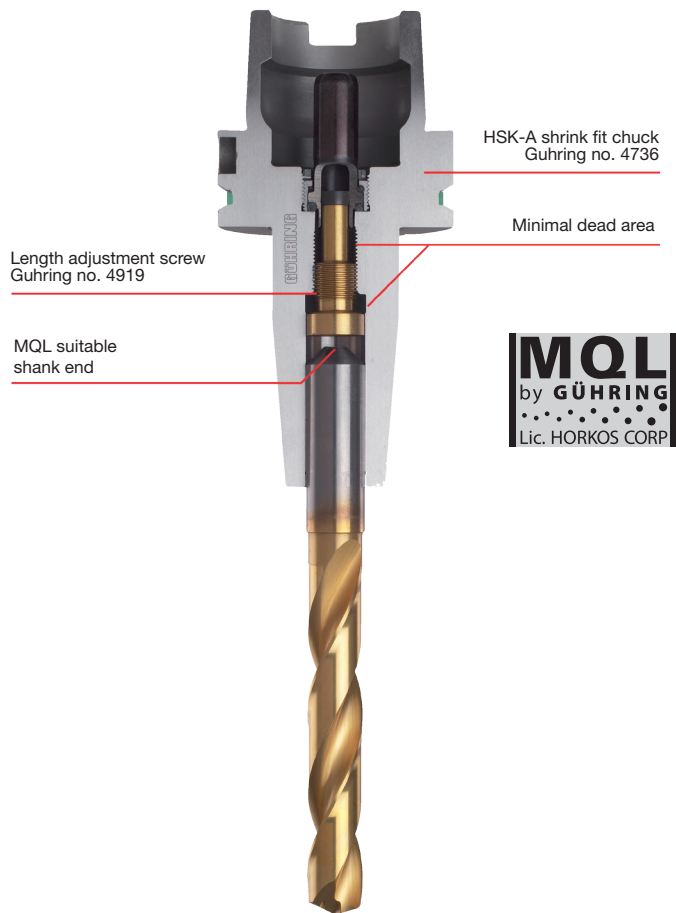




High speed steel straight shanks, DIN 1835-1 (extract)


Form A, plain

Dimensions in mm

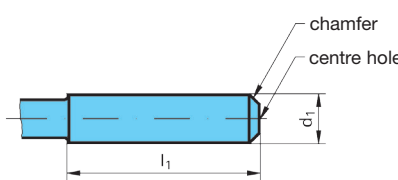	d ₁	l ₁	d ₁	l ₁	d ₁	l ₁
	h8	+2 0	h8	+2 0	h8	+2 0
	3	28	12	45	50	80
	4	28	16	48	63	90
	5	28	20	50		
	6	36	25	56		
	8	36	32	60		
	10	40	40	70		


Form B, with drive flat

Dimensions in mm

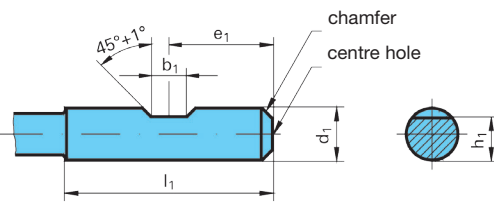
	d ₁	b ₁	e ₁	h ₁	l ₁	l ₂	centre hole form R DIN 332 sect. 1
	h6	+0.05 0	0 -1	h13	+2 0	+1 0	
with one drive flat for d ₁ = 6 ... 20 mm	6	4.2	18	4.8	36	-	1.6x2.5
	8	5.5	18	6.6	36	-	1.6x3.35
	10	7	20	8.4	40	-	1.6x3.35
	12	8	22.5	10.4	45	-	1.6x3.35
	16	10	24	14.2	48	-	2.0x4.25
	20	11	25	18.2	50	-	2.5x5.3
with two drive flats for d ₁ = 25 ... 63 mm	25	12	32	23	56	17	2.5x5.3
	32	14	36	30	60	19	3.15x6.7
	40	14	40	38	70	19	3.15x6.7
	50	18	45	47.8	80	23	3.15x6.7
	63	18	50	60.8	90	23	3.15x6.7

Form D, screwed shank

Dimensions in mm

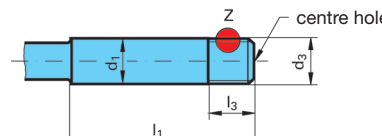	d ₁	d ₃	tol. zone	d ₂	tol. zone	l ₁	l ₃	centre hole form R DIN 332 sect. 1
	h8					+2 0	+2 0	
	6	5.9	0 -0.1	5.087	0 -0.1	36	10	1.6 x 2.5
	10	9.9	0 -0.1	9.087	0 -0.1	40	10	1.6 x 3.35
	12	11.9	0 -0.1	11.087	0 -0.1	45	10	1.6 x 3.35
	16	15.9	0 -0.1	15.087	0 -0.1	48	10	2.0 x 4.25
	20	19.9	0 -0.15	19.087	0 -0.15	50	15	2.5 x 5.3
	25	24.9	0 -0.15	24.087	0 -0.15	56	15	2.5 x 5.3
	32	31.9	0 -0.15	31.087	0 -0.15	60	15	3.15 x 6.7

detail Z
(cross section)
thread profile to
DIN ISO 228 part 1

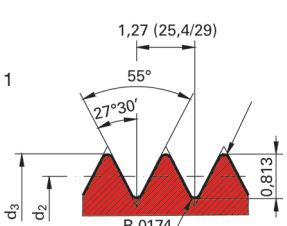

General



Carbide straight shanks DIN 6535 for twist drills and end mills

Form HA, plain

Dimensions in mm

Diagram	d ₁	l ₁	d ₁	l ₁
	h6	+2 0	h6	+2 0
	2	28	14	45
	3	28	16	48
	4	28	18	48
	5	28	20	50
	6	36	25	56
	8	36	32	60
	10	40		
	12	45		

Form HB, with drive flat

Dimensions in mm

Diagram	d ₁	b ₁	e ₁	h ₁	l ₁	l ₂
	h6	+0.05 0	0 -1	h11	+2 0	+1 0
<p>with one drive flat for d₁ = 6 and 20 mm</p>	6	4.2	18	5.1	36	-
	8	5.5	18	6.9	36	-
	10	7	20	8.5	40	-
	12	8	22.5	10.4	45	-
	14	8	22.5	12.7	45	-
	16	10	24	14.2	48	-
	18	10	24	16.2	48	-
	20	11	25	18.2	50	-
<p>with two drive flats for d₁ = 25 and 32 mm</p>	25	12	32	23	56	17
	32	14	36	30	60	19

Form HE, with whistle notch flat without coolant ducts*

* Design: Straight shanks to DIN 6335 are available with or without oil feed holes. Applications for various tools, dimensions and position of oil feed holes are fully described within the standard range sections.


Dimensions in mm

Diagram	d ₁	(b ₂)	(b ₃)	h ₂	(h ₃)	l ₁	l ₄	l ₅	r ₂
	h6	≈		h11		+2 0	0 -1	nom. size	min.
<p>for d₁ = 6 to 20 mm</p>	6	4.3	-	5.1	-	36	25	18	1.2
	8	5.5	-	6.9	-	36	25	18	1.2
	10	7.1	-	8.5	-	40	28	20	1.2
	12	8.2	-	10.4	-	45	33	22.5	1.2
	14	8.1	-	12.7	-	45	33	22.5	1.2
	16	10.1	-	14.2	-	48	36	24	1.6
	18	10.8	-	16.2	-	48	36	24	1.6
	20	11.4	-	18.2	-	50	38	25	1.6
<p>for d₁ = 25 and 32 mm</p>	25	13.6	9.3	23.0	24.1	56	44	32	1.6
	32	15.5	9.9	30.0	31.2	60	48	35	1.6



Morse taper shanks DIN 228 part 1 (extract)


Form B, Morse taper with tang

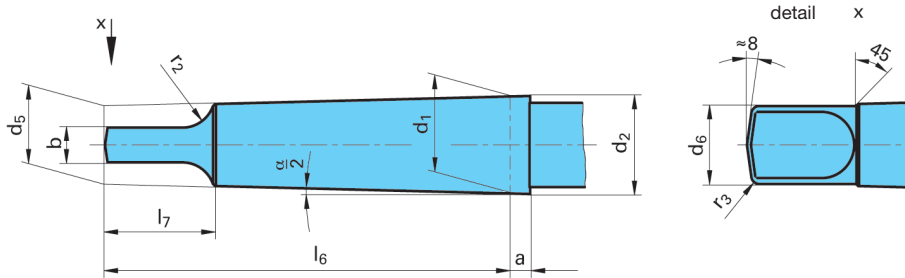

Dimensions in mm

shank to DIN 228 form B size	a	limiting dim.	b	d ₁	d ₂	d ₅	d ₆ max.	l ₆ _{-0.1}	l ₇ max.	r ₂ max.	r ₃	$\frac{\alpha}{2}$
MT 1	3.5	$\begin{smallmatrix} +1.4 \\ 0 \end{smallmatrix}$	5.2	12.065	12.2	9.0	8.7	62	13.5	5	1.2	1°25'43"
MT 2	5.0	$\begin{smallmatrix} +1.4 \\ 0 \end{smallmatrix}$	6.3	17.780	18.0	14.0	13.5	75	16	6	1.6	1°25'50"
MT 3	5.0	$\begin{smallmatrix} +1.7 \\ 0 \end{smallmatrix}$	7.9	23.825	24.1	19.1	18.5	94	20	7	2	1°26'16"
MT 4	6.5	$\begin{smallmatrix} +1.9 \\ 0 \end{smallmatrix}$	11.9	31.267	31.6	25.2	24.5	117.5	24	8	2.5	1°29'15"
MT 5	6.5	$\begin{smallmatrix} +1.9 \\ 0 \end{smallmatrix}$	15.9	44.399	44.7	36.5	35.7	149.5	29	10	3	1°30'26"

ISO tapers for automatic tool change, DIN 69871 (extract) Form A, with gripper groove, without through hole

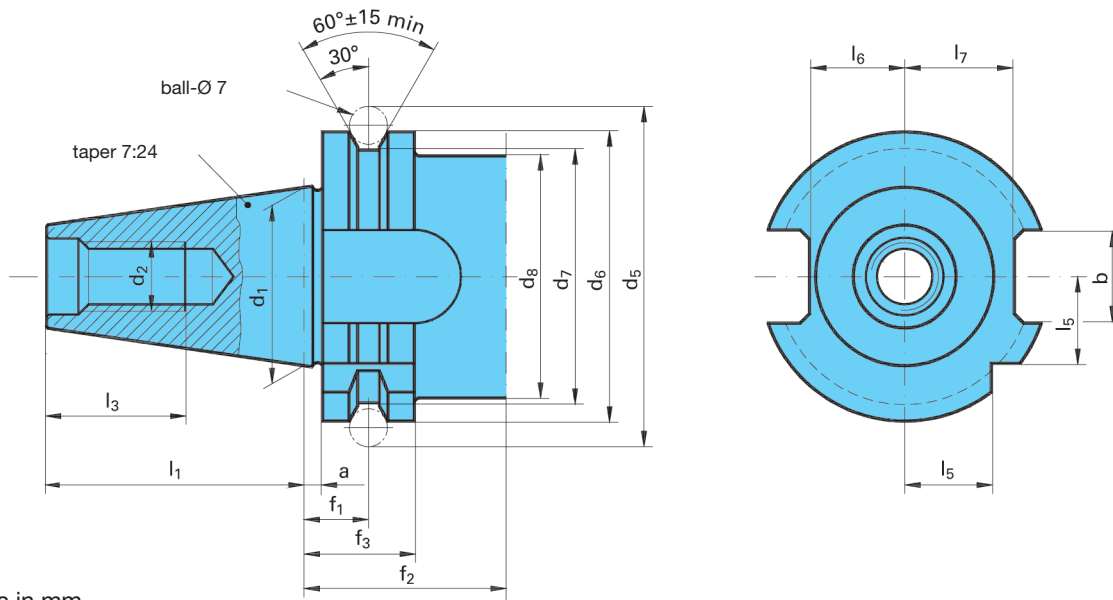

Dimensions in mm

ISO taper no.	a	b	d ₁	d ₂	d ₅	d ₆	d ₇	d ₈	f ₁	f ₂	f ₃	l ₁	l ₃	l ₅	l ₆	l ₇
	±0.1	H12			±0.05	0 -0.1	0 -0.5	max.	±0.1	min.	0 -0.1	0 -0.3	min.	0 -0.3	0 -0.4	0 -0.4
30	3.2	16.1	31.75	M12	59.3	50.00	44.30	45	11.1	35	19.1	47.8	24	15	16.4	19
40	3.2	16.1	44.45	M16	72.3	63.55	63.55	50	11.1	35	19.1	68.4	32	18.5	22.8	25
45	3.2	19.3	57.15	M20	91.35	82.55	82.55	63	11.1	35	19.1	82.7	40	24	29.1	31.3
50	3.2	25.7	69.85	M24	107.25	97.50	97.50	80	11.1	35	19.1	101.75	47	30	35.5	37.7



From 1/64 to 11 63/64

Size (inch)	mm	Part of inch (decimal)	Size (inch)	mm	Part of inch (decimal)	Size (inch)	mm	Part of inch (decimal)	Size (inch)	mm	Part of inch (decimal)
-	0.10	0.0039	51	1.70	0.0670	4	5.31	0.2090	-	14.00	0.5512
97	0.15	0.0059		1.75	0.0689	3	5.41	0.2130	9/16	14.29	0.5625
96	0.16	0.0063	50	1.78	0.0700		5.50	0.2165		14.50	0.5709
				1.80	0.0709	7/32	5.56	0.2188	37/64	14.68	0.5781
95	0.17	0.0067		1.85	0.0730	2	5.61	0.2210	-	15.00	0.5906
94	0.18	0.0071	49	1.90	0.0748	1	5.79	0.2280	19/32	15.08	0.5938
93	0.19	0.0075		1.93	0.0760	A	5.94	0.2340	39/64	15.48	0.6094
92	0.20	0.0079	48	1.95	0.0768	15/64	5.95	0.2344		15.50	0.6102
91	0.21	0.0083		1.98	0.0781	-	6.00	0.2362	5/8	15.88	0.6250
90	0.22	0.0087	5/64	1.99	0.0785	B	6.05	0.2380	-	16.00	0.6299
89	0.23	0.0091	47	2.00	0.0787	C	6.15	0.2420	41/64	16.27	0.6406
88	0.24	0.0095	-	2.05	0.0807	D	6.25	0.2460		16.50	0.6496
-	0.25	0.0098		2.06	0.0810	1/4	6.35	0.2500	21/32	16.67	0.6562
87	0.25	0.0100	46	2.08	0.0820	E	6.35	0.2500	-	17.00	0.6693
	0.26	0.0102	45	2.15	0.0846		6.50	0.2559	43/64	17.07	0.6719
86	0.27	0.0105		2.18	0.0860	F	6.53	0.2570		17.46	0.6875
	0.27	0.0106	44	2.26	0.0890	G	6.63	0.2610	11/16	17.50	0.6890
85	0.28	0.0110	43	2.37	0.0935	17/64	6.75	0.2656		17.86	0.7031
	0.29	0.0114	42	2.38	0.0938		6.75	0.2657	-	18.00	0.7087
84	0.29	0.0115	3/32	2.44	0.0960	H	6.76	0.2660	23/32	18.26	0.7188
-	0.30	0.0118	41	2.50	0.0980	I	6.91	0.2720		18.50	0.7283
83	0.30	0.0120	40	2.53	0.0995	-	7.00	0.2756	47/64	18.65	0.7344
	0.32	0.0125	39	2.58	0.1015	J	7.04	0.2772	-	19.00	0.7480
	0.32	0.0126	38	2.64	0.1040	K	7.14	0.2810	3/4	19.05	0.7500
81	0.33	0.0130	37	2.71	0.1065		7.14	0.2812	49/64	19.45	0.7656
	0.34	0.0135	36	2.78	0.1094	9/32	7.14	0.2812		19.50	0.7677
80	0.34	0.0135	7/64	2.79	0.1100	L	7.37	0.2900		19.84	0.7812
79	0.37	0.0145	35	2.82	0.1110	M	7.49	0.2949	25/32	19.84	0.7812
1/64	0.40	0.0156	34	2.87	0.1130		7.50	0.2953	-	20.00	0.7874
78	0.41	0.0160	33	2.90	0.1142	19/64	7.54	0.2969	51/64	20.24	0.7969
77	0.46	0.0180		2.95	0.1160	N	7.67	0.3020		20.50	0.8071
-	0.50	0.0197	32	3.00	0.1181		7.75	0.3051	13/16	20.64	0.8125
76	0.51	0.0200	-	3.05	0.1200	5/16	7.94	0.3125	-	21.00	0.8268
75	0.53	0.0210	31	3.18	0.1250	-	8.00	0.3150	53/64	21.03	0.8281
74	0.57	0.0225	1/8	3.26	0.1285	O	8.03	0.3160	27/32	21.43	0.8438
-	0.60	0.0236	30	3.30	0.1299	P	8.20	0.3230		21.50	0.8465
73	0.61	0.0240		3.45	0.1360	21/64	8.33	0.3281	55/64	21.84	0.8594
72	0.64	0.0250	29	3.50	0.1378	Q	8.43	0.3320	-	22.00	0.8661
	0.66	0.0260		3.57	0.1405		8.50	0.3346	7/8	22.23	0.8750
71	0.66	0.0260	28	3.57	0.1405	R	8.61	0.3390		22.50	0.8858
-	0.70	0.0276	9/64	3.66	0.1440		8.73	0.3438	57/64	22.62	0.8906
70	0.71	0.0280	27	3.73	0.1470		8.75	0.3445	-	23.00	0.9055
69	0.74	0.0292	26	3.75	0.1476	S	8.84	0.3480	29/32	23.02	0.9062
-	0.75	0.0295		3.80	0.1495	-	9.00	0.3543	59/64	23.42	0.9219
68	0.79	0.0310	25	3.86	0.1520	T	9.09	0.3580		23.50	0.9252
1/32	0.79	0.0313	24	3.91	0.1540	23/64	9.13	0.3594	15/16	23.81	0.9375
-	0.80	0.0315	23	3.97	0.1562	U	9.35	0.3680	-	24.00	0.9449
67	0.81	0.0320	5/32	3.99	0.1570		9.50	0.3740	61/64	24.21	0.9531
66	0.84	0.0330	22	4.00	0.1575	3/8	9.53	0.3750		24.50	0.9646
65	0.89	0.0350	-	4.04	0.1590	V	9.56	0.3770	31/32	24.61	0.9688
-	0.90	0.0354	21	4.09	0.1610	W	9.80	0.3860	-	25.00	0.9843
64	0.91	0.0360	20	4.20	0.1654	25/64	9.92	0.3906	63/64	25.00	0.9844
63	0.94	0.0370		4.22	0.1660	-	10.00	0.3937	1	25.40	1.0000
62	0.97	0.0380	19	4.31	0.1695	X	10.08	0.3970			
61	0.99	0.0390	18	4.37	0.1719	Y	10.26	0.4040			
-	1.00	0.0394	11/64	4.39	0.1730	13/32	10.32	0.4062			
60	1.02	0.0400	17	4.45	0.1770	Z	10.49	0.4130			
59	1.04	0.0410	16	4.57	0.1800		10.50	0.4134			
58	1.07	0.0420	15	4.62	0.1820	27/64	10.72	0.4219			
57	1.09	0.0430	14	4.70	0.1850	-	11.00	0.4331			
			13	4.76	0.1875	7/16	11.11	0.4375			
56	1.18	0.0465	3/16	4.80	0.1890		11.50	0.4528			
3/64	1.19	0.0469	12	4.85	0.1910	29/64	11.51	0.4531			
	1.20	0.0472	11	4.91	0.1935	15/32	11.91	0.4688			
	1.25	0.0492	10	4.98	0.1960	-	12.00	0.4724			
	1.30	0.0512	9	5.05	0.1990	31/64	12.30	0.4844			
55	1.32	0.0520	-	5.11	0.2010		12.50	0.4921			
	1.40	0.0550	8	5.18	0.2040	1/2	12.70	0.5000			
	1.45	0.0571	7	5.22	0.2055	-	13.00	0.5118			
	1.50	0.0591	13/64	5.25	0.2067	33/64	13.10	0.5156			
53	1.51	0.0595					13.49	0.5312			
	1.55	0.0610				17/32	13.50	0.5315			
1/16	1.59	0.0625					13.89	0.5469			
	1.60	0.0630									
	1.61	0.0635									
52	1.65	0.0650									

1 inch = 25.400 0 mm, see DIN 4890 (issue 2/75)




The new material abbreviations (selection)

mat. nos.	abbreviation old	abbreviation new	mat. nos.	abbreviation old	abbreviation new	mat. nos.	abbreviation old	abbreviation new	mat. nos.	abbreviation old	abbreviation new
0.6010	GG10	EN-GJL-100	1.0728	60 S 20	-	1.4436	X5CrNiMo 17 13 3	X3CrNiMo17-13-3	1.7043	-	38Cr4
0.6020	GG20	EN-GJL-200	1.0736	9 SMn 36	11SMn37	1.4438	X2CrNiMo 18 16 4	X2CrNiMo18-15-4	1.7147	20 MnCr 5	20MnCr5
0.6025	GG25	EN-GJL-250	1.0737	9 SMnPb 36	11SMnPb37	1.4460	X4CrNiMo 27 5 2	X3CrNiMoN27-5-2	1.7149	20 MnCrS 5	20MnCrS5
0.6035	GG35	EN-GJL-350	1.0756	35 SPb 20	35SPb20	1.4462	X2CrNiMoN22 5 3	X2CrNiMoN22-5-3	1.7176	55 Cr 3	55Cr3
0.7050	GGG50	EN-GJS-500-7	1.0757	45 SPb 20	46SPb20	1.4509	X6CrTiNb 18	X2CrTiNb18	1.7182	27 MnCrB 5 2	27MnCrB5-2
0.7070	GGG70	EN-GJS-700-2	1.0760	-	38SMn26	1.4510	X6CrTi 17	X3CrTi17	1.7185	33 MnCrB 5 2	33MnCrB5-2
0.8035	GTW35	EN-GJMW-350-4	1.0761	-	38SMnPb26	1.4511	X6CrNb 17	X3CrNb17	1.7189	39 MnCrB 6 2	39MnCrB6-2
0.8155	GTS55	EN-GJMB-550-4	1.0762	-	44SMn28	1.4512	X6CrTi 12	X2CrTi12	1.7213	25 CrMoS 4	25CrMoS4
0.8170	GTS70	EN-GJMB-700-2	1.0763	-	44SMnPb28	1.4520	X1CrTi 15	X2CrTi17	1.7218	25 CrMo 4	25CrMo4
1.0022	St 01Z	-	1.0873	-	DC06 [Fe P06]	1.4521	X2CrMoTi 18 2	X2CrMoTi18-2	1.7219	-	26CrMo4-2
1.0035	St 33	S185	1.1103	ESiE 255	S255NL1	1.4522	X2CrMoNb 18 2	X2CrMoNb18-2	1.7220	34 CrMo 4	34CrMo4
1.0039	St 37 -2	S235JRH	1.1105	ESiE 315	S315NL1	1.4532	X7CrNiMoAl 15 7	X8CrNiMoAl15-7-2	1.7225	42 CrMo 4	42CrMo4
1.0044	St 44 -2	S275JR	1.1121	Ck 10	C10E	1.4541	X6CrNiTi18 10	X6CrNiTi18-10	1.7226	34 CrMoS 4	34CrMoS4
1.0050	St 50 -2	E295	1.1141	Ck15	C15E	1.4542	X5CrNiCuNb 17 4	X5CrNiCuNb16-4	1.7227	42 CrMoS 4	42CrMoS4
1.0060	St 60 -2	E335	1.1151	Ck 22	C22E	1.4550	X6CrNiNb 18 10	X6CrNiNb18-10	1.7228	50 CrMo 4	50CrMo4
1.0070	St 70 -2	E360	1.1158	Ck 25	C25E	1.4558	X2NiCrAlTi 32 20	X2NiCrAlTi32-20	1.7264	20 CrMo 5	20CrMo5
1.0114	St 37 -3U	S235J0	1.1170	28 Mn 6	28Mn6	1.4567	X3CrNiCu 18 9 X	X3CrNiCu18-9-4	1.7321	20 MoCr 4	20MoCr4
1.0226	St 02Z	DX51D	1.1178	Ck 30	C30E	1.4568	X7CrNiAl 17 7	X7CrNiAl17-7	1.7323	20 MoCrS 4	20MoCrS4
1.0242	StE 250 -2Z	S250GD	1.1181	Ck 35	C35E	1.4577	X3CrNiMoTi 25 25	X3CrNiMoTi25-25	1.7333	22 CrMoS 3 5	22CrMoS3-5
1.0244	StE 280 -2Z	S280GD	1.1186	Ck 40	C40E	1.4592	X1CrMoTi 29 4	X2CrMoTi29-4	1.7335	13 CrMo 4 4	13CrMo4-5
1.0250	StE 320 -3Z	S320GD	1.1191	Ck 45	C45E	1.4713	X10CrAl 7	X10CrAlSi7	1.7362	12 CrMo 19 5	12CrMo19-5
1.0301	C 10	-	1.1203	Ck 55	C55E	1.4724	X10CrAl 13	X10CrAlSi13	1.7380	10 CrMo 9 10	10CrMo9-10
1.0302	C 10 Pb	-	1.1206	Ck 50	C50E	1.4742	X10CrAl 18	X10CrAlSi18	1.7383	-	11CrMo9-10
1.0306	St 06 Z	DX54D	1.1221	Ck 60	C60E	1.4762	X10CrAl 24	X10CrAlSi25	1.7779	-	20CrMoV13-5-5
1.0312	St 15	DC05 [Fe P05]	1.1241	Cm 50	C50R	1.4821	X20CrNiSi 25 4	X20CrNiSi25-4	1.8159	50 CrV 4	51CrV4
1.0319	RRStE 210.7	L210GA	1.1750	C 75 W	C75W	1.4828	X15CrNiSi 20 12	X15CrNiSi20-12	1.8504	34 CrAl 6	34CrAl6
1.0322	-	DX56D	1.2067	102 Cr 6	102Cr6	1.4833	X7CrNi 23 14	X7CrNi23-12	1.8519	31 CrMoV 9	31CrMoV9
1.0330	St 12 [St 2]	DC01 [Fe P01]	1.2080	-	X210Cr12	1.4841	X15CrNiSi 25 20	X15CrNiSi25-21	1.8550	34 CrAlNi 7	34CrAlNi7
1.0333	USt 13	-	1.2083	-	X42Cr13	1.4845	X12CrNi 25 21	X12CrNi25-21	1.8807	13 MnNiMoV 5 4	13MnNiMoV5-4
1.0338	St 14 [St 4]	DC04 [Fe P04]	1.2419	-	105WCr6	1.4864	X12NiCrSi 36 16	X12NiCrSi35-16	1.8812	18 MnMoV 5 2	18MnMoV5-2
1.0345	H I	P235GH	1.2767	-	X45NiCrMo4	1.4878	X12CrNiTi18 9	X10CrNiTi18-10	1.8815	18 MnMoV 6 3	18MnMoV6-3
1.0347	RRSt 13 [RRSt 3]	DC03 [Fe P03]	1.3243	S6-5-2-5	S 6-5-2-5	1.4903	-	X10CrMoVNb9-1	1.8824	StE 420 TM	P420M
1.0348	UH I	P195GH	1.3344	S6-5-3	S 6-5-3	1.5026	55 Si 7	55Si7	1.8826	StE 460 TM	P460M
1.0350	St 03Z	DX52D	1.4000	X6Cr 13	X6Cr13	1.5131	50 MnSi 4	50MnSi4	1.8828	EstE 420 TM	P420ML2
1.0355	St 05Z	DX53D	1.4002	X6CrAl 13	X6CrAl13	1.5415	15 Mo 3	16Mo3	1.8831	EstE 460 TM	P460ML2
1.0356	TTSt 35 N	P215NL	1.4003	X2Cr 11	X2CrNi12	1.5530	21 MnB 5	20MnB5	1.8832	TStE 355 TM	P355ML1
1.0358	St 05 Z	-	1.4005	-	X12CrS13	1.5531	30 MnB 5	30MnB5	1.8835	TStE 420 TM	P420ML1
1.0401	C 15	-	1.4006	X10Cr 13	X12Cr13	1.5532	38 MnB 5	38MnB5	1.8837	TStE 460 TM	P460ML1
1.0402	C 22	C22	1.4016	X6Cr 17	X6Cr17	1.5637	10 Ni 14	12Ni14	1.8879	StE ...	P690Q
1.0403	C 15 Pb	-	1.4021	X20Cr 13	X20Cr13	1.5662	-	X11CrMo5+I	1.8880	WStE ...	P690QH
1.0406	C 25	C25	1.4028	X30Cr 13	X30Cr13	1.5680	-	X12Ni5	1.8881	TStE ...	P690QL1
1.0419	St 52.0	L355	1.4031	X38Cr 13	X38Cr13	1.5710	36 NiCr 6	36NiCr6	1.8882	10 MnTi 3	10MnTi3
1.0424	St 45.8 (ersetzt)	P265	1.4034	X46Cr 13	X46Cr13	1.5715	-	16NiCrS4	1.8888	EstE ...	P690QL2
1.0424	St 42.8 (ersetzt)	P265	1.4037	X65Cr13	X65Cr13	1.5752	14 NiCr 14	15NiCr13	1.8900	StE 380	S380N
1.0425	H2	P265GH	1.4057	X20CrNi 17 2	X17CrNi16-2	1.6210	15 MnNi 6 3	15MnNi6-3	1.8901	StE 460	S460N
1.0429	StE 290.7 TM	L290MB	1.4104	X12CrMoS 17	X14CrMoS17	1.6211	16 MnNi 6 3	16MnNi6-3	1.8902	StE 420	S420N
1.0457	StE 240.7	L245NB	1.4105	X4CrMoS 18	X6CrMoS18	1.6310	20 MnMoNi 5 5	20MnMoNi5-5	1.8903	TStE 460	S460NL
1.0459	RRStE 240.7	L245GA	1.4109	X65CrMo 14	X70CrMo15	1.6311	20 MnMoNi 4 5	20MnMoNi4-5	1.8905	StE 460	P460N
1.0461	StE 255	S255N	1.4110	X55CrMo 14	X55CrMo14	1.6341	11 NiMoV 5 3	11NiMoV5-3	1.8907	StE 500	S500N
1.0473	19 Mn 6	P355GH	1.4112	X90CrMoV 18	X90CrMoV18	1.6368	15 NiCuMoNb 5	15NiCuMoNb5	1.8910	TStE 380	S380NL
1.0481	17 Mn 4	P295GH	1.4113	X6CrMo 17 1	X6CrMo17-1	1.6511	36 CrNiMo 4	36CrNiMo4	1.8911	EstE 380	S380NL1
1.0484	StE 290.7	L290NB	1.4116	X45CrMoV 15	X50CrMoV15	1.6523	21 NiCrMo 2	21NiCrMo2-2	1.8912	TStE 420	S420NL
1.0486	StE 285	P275N	1.4120	X20CrMo 13	X20CrMo13	1.6526	21 NiCrMoS 2	21NiCrMoS2-2	1.8913	EstE 420	S420NL1
1.0501	C 35	C35	1.4122	X35CrMo 17	X39CrMo17-1	1.6580	30 CrNiMo 8	30CrNiMo8	1.8915	TStE 460	P460NL1
1.0503	C 45	C45	1.4125	X105CrMo 17	X105CrMo17	1.6582	34 CrNiMo 6	34CrNiMo6	1.8917	WStE 500	S500NL
1.0505	StE 315	P315N	1.4301	X5CrNi 18 10	X5CrNi18-10	1.6587	17 CrNiMo 6	18CrNiMo7-6	1.8918	EstE 460	P460NL2
1.0511	C 40	C40	1.4303	X5CrNi 18 12	X4CrNi18-12	1.7003	38 Cr 2	38Cr2	1.8919	EstE 500	S500NL1
1.0528	C 30	C30	1.4305	X10CrNiS 18 9	X8CrNiS18-9	1.7006	46 Cr 2	46Cr2	1.8930	WStE 380	P380NH
1.0529	StE 350 -3Z	S350GD	1.4306	X2CrNi 19 11	X2CrNi19-11	1.7016	17 Cr 3	17Cr3	1.8932	WStE 420	P420NH
1.0535	C 55	C55	1.4310	X12CrNi 17 7	X10CrNi18-8	1.7023	38 CrS 2	38CrS2	1.8935	WStE 460	P460NH
1.0539	StE 355N	S355NH	1.4311	X2CrNiN 18 10	X2CrNiN18-10	1.7025	46 CrS 2	46CrS2	1.8937	TStE 500	P500NH
1.0540	C 50	C50	1.4313	X4CrNi 13 4	X3CrNiMo13-4	1.7030	28 Cr 4	28Cr4	1.8972	StE 415.7	L415NB
1.0547	St 52 -3U	S355J0H	1.4318	X2CrNiN 18 7	X2CrNiN18-7	1.7033	34 Cr 4	34Cr4	1.8973	StE 415.7 TM	L415MB
1.0582	StE 360.7	L360NB	1.4335	X1CrNi 25 21	X1CrNi25-21	1.7034	37 Cr 4	37Cr4	1.8975	StE 445.7 TM	L450MB
1.0601	C 60	C60	1.4361	X1CrNiSi 18 15	X1CrNiSi18-15-4	1.7035	41 Cr 4	41Cr4	1.8977	StE 480.7 TM	L485MB
1.0710	15 S 10	-	1.4362	X2CrNiN 23 4	X2CrNiN23-4	1.7036	28 CrS 4	28CrS4	1.8978	StE 550.7 TM	L555MB
1.0715	9 SMn 28	11SMn30	1.4401	X5CrNiMo 17 12 2	X5CrNiMo17-12-2	1.7037	34 CrS 4	34CrS4			
1.0718	9 SMnPb 28	11SMnPb30	1.4404	X2CrNiMo 17 13 2	X2CrNiMo17-12-2	1.7038	37 CrS 4	37CrS4			
1.0721	10 S 20	10S20	1.4410	X10CrNiMo 18 9	X2CrNiMoN25-7-4	1.7039	41 CrS 4	41CrS4			
1.0722	10 S Pb 20	10SPb20	1.4418	X4CrNiMo 16 5	X4CrNiMo16-5-1	1.7131	16 MnCr 5	16MnCr5			
1.0726	35 S 20	35S20	1.4435	X2CrNiMo 18 14 3	X2CrNiMo18-14-3	1.7139	16 MnCrS 5	16MnCrS5			





Definitions, dimensions and angles DIN ISO 5419 (extract; edition 06/98)

Twist drills with straight/Morse taper shank

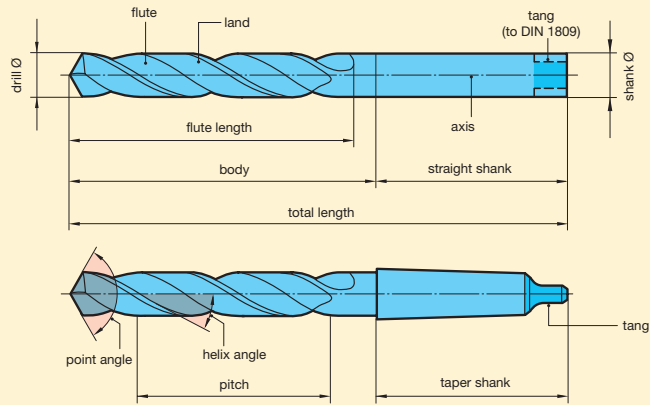


Cutting portion

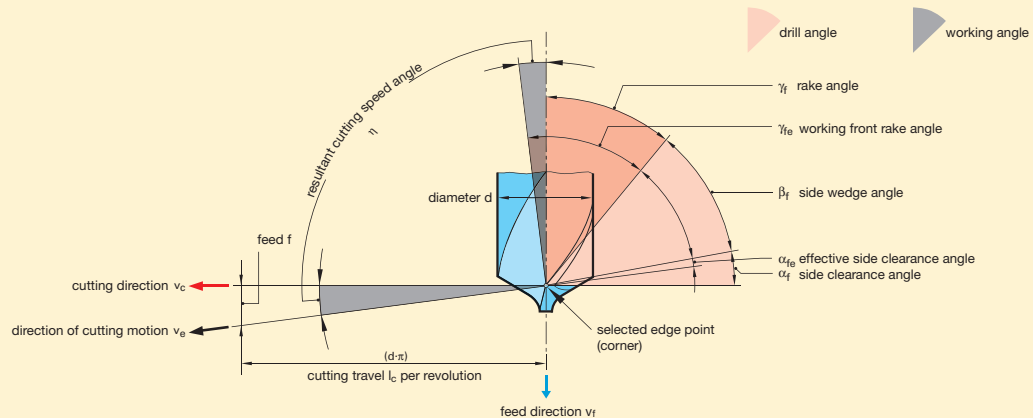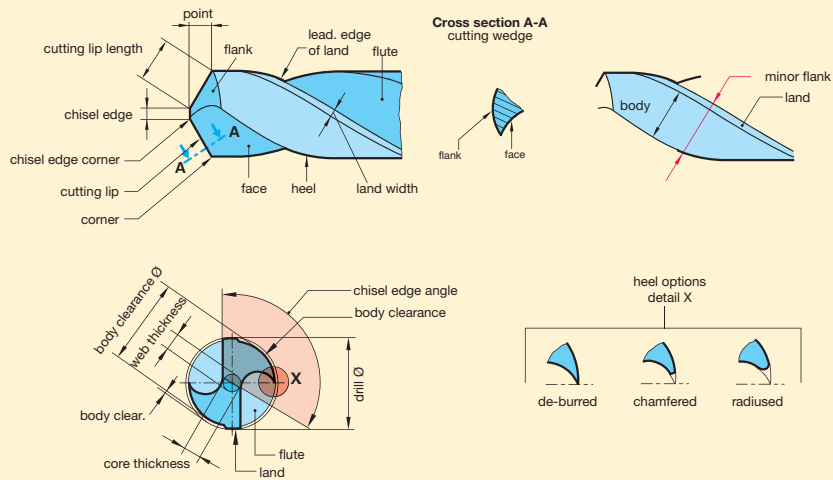



Special point geometry and manufacturing tolerances

Special point geometry to DIN 1412 (extract; edition 03/01)

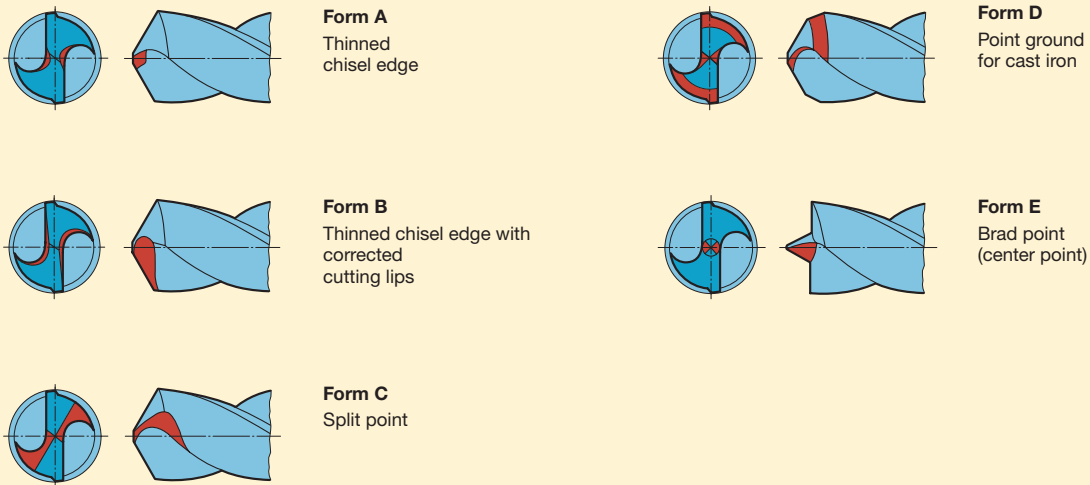

Twist drill manufacturing tolerances to DIN ISO 286, part 2

diameter (nominal size) up to and incl. mm	tolerance range mm	
	h8	h7
0.38 ... 0.60	10	7
0.95	12	8
3.00	14	10
6.00	18	12
10.00	22	15
18.00	27	18
30.00	33	21
50.00	39	25
80.00	46	30
120.00	54	35

* If you need tolerances other than ISO h8 please let us know. Additional charges for closer diameter tolerance see additional charges at the end of chapter Drilling Tools.

Reference to other relevant standards

- DIN 228 Part 1 machine tapers; Morse tapers and metric tapers, taper shank
- DIN 1414-1 Directions for design and use for high speed steel twist drills
- DIN 6580 Definitions of the metal-cutting industry; motions and geometry of the cutting process
- DIN 6581 Definitions of the metal-cutting industry; Cutting portion reference systems and angles

The standard descriptions above are given with the permission from the German Standards Institute (Deutsches Institut für Normung). The most recent editions of the standard sheets apply and are available in DIN A 4 format from Beuth-Verlag GmbH, D-10787 Berlin.



Straight shank twist drills

dia. to (incl.) mm	DIN 338		DIN 339		DIN 340		DIN 1897		DIN 1869 Extra length twist drills					
	total length mm	flute length mm	total length mm	flute length mm	total length mm	flute length mm	total length mm	flute length mm	series 1		series 2		series 3	
									total length mm	flute length mm	total length mm	flute length mm	total length mm	flute length mm
≤ 0.24	19	2.5					19	1.5						
0.30	19	3					19	1.5						
0.38	19	4					19	2						
0.48	20	5			30*	10*	19	2.5						
0.53	22	6			32*	12*	20	3						
0.60	24	7	32*	15*	35*	15*	21	3.5						
0.67	26	8	36*	18*	38*	18*	22	4						
0.75	28	9	39*	20*	42*	21*	23	4.5						
0.85	30	10	42*	22*	46*	25*	24	5						
0.95	32	11	45*	24*	51*	29*	25	5.5						
1.06	34	12	48	26	56	33	26	6						
1.18	36	14	50	28	60	37	28	7						
1.32	38	16	52	30	65	41	30	8						
1.50	40	18	55	33	70	45	32	9						
1.70	43	20	58	35	76	50	34	10	115*	75*				
1.90	46	22	62	38	80	53	36	11	120*	80*				
2.12	49	24	66	41	85	56	38	12	125	85	160*	110*	205*	135*
2.36	53	27	70	44	90	59	40	13	135	90	170*	115*	215*	145*
2.65	57	30	74	47	95	62	43	14	140	95	180*	120*	225*	150*
3.00	61	33	79	51	100	66	46	16	150	100	190	130	240*	160*
3.35	65	36	84	55	106	69	49	18	155	105	200	135	250*	170*
3.75	70	39	91	60	112	73	52	20	165	115	210	145	265	180
4.25	75	43	96	64	119	78	55	22	175	120	220	150	280	190
4.75	80	47	102	69	126	82	58	24	185	125	235	160	295	200
5.30	86	52	108	74	132	87	62	26	195	135	245	170	315	210
6.00	93	57	116	80	139	91	66	28	205	140	260	180	330	225
6.70	101	63	124	86	148	97	70	31	215	150	275	190	350	235
7.50	109	69	133	93	156	102	74	34	225	155	290	200	370	250
8.50	117	75	142	100	165	109	79	37	240	165	305	210	390	265
9.50	125	81	151	107	175	115	84	40	250	175	320	220	410	280
10.60	133	87	162	116	184	121	89	43	265	185	340	235	430	295
11.80	142	94	173	125	195	128	95	47	280*	195*	365*	250*	455*	310*
13.20	151	101	184	134	205	134	102	51	295*	205*	375*	260*	480*	330*
14.00	160	108	194	142	214	140	107	54						
15.00	169	114	202	147	220	144	111	56						
16.00	178	120	211	153	227	149	115	58						
17.00	184	125	218	159	235	154	119	60						
18.00	191	130	226	165	241	158	123	62						
19.00	198	135	234	171	247	162	127	64						
20.00	205	140	242	177	254	166	131	66						
21.20					261	171	136	68						
22.40					268	176	141	70						
23.60					275	180	146	72						
25.00					282	185	151	75						
26.50					290	190	156	78						
28.00					298	195	162	81						
30.00					307	201	168	84						
31.50					316	207	174	87						
33.50							180	90						
35.50							186	93						
37.50							193	96						
40.00							200	100						
42.50							207	104						
45.00							214	108						
47.50							221	112						
50.00							228	116						

Guhring delivers twist drills to Guhring standard up to total length of 1000 mm Guhring no. 242, 243, 244

* Guhring std.



Morse taper twist drills

dia. to (incl.) mm	DIN 345			DIN 346			DIN 341			Bushing drills with oversized taper*			GV/VA-drills* for drilling difficult materials			DIN 1870 Extra length twist drills					
	total length	flute length	Morse taper	total length	flute length	Morse taper	total length	flute length	Morse taper	total length	flute length	Morse taper	total length	flute length	Morse taper	series 1			series 2		
																mm	mm	mm	mm	mm	mm
2.65	111*	30*	1*																		
3.00	114	33	1																		
3.35	117	36	1																		
3.75	120	39	1																		
4.25	124	43	1				145*	64*	1*												
4.75	128	47	1				150*	69*	1*												
5.30	133	52	1				155	74	1												
6.00	138	57	1				161	80	1												
6.70	144	63	1				167	86	1												
7.50	150	69	1				174	93	1												
8.50	156	75	1				181	100	1				130	49	1	265	165	1	330	210	1
9.50	162	81	1				188	107	1				134	53	1	275	175	1	345	220	1
10.60	168	87	1	185*	87*	2*	197	116	1	214	116	2	138	57	1	285	185	1	360	235	1
11.80	175	94	1	192*	94*	2*	206	125	1	223	125	2	142	61	1	300	195	1	375	250	1
13.20	182	101	1	199	101	2	215	134	1	232	134	2	147	66	1	310	205	1	395	260	1
14.00	189	108	1	206	108	2	223	142	1	240	142	2	168	70	2	325	220	1	410	275	1
15.00	212	114	2	235*	114*	3*	245	147	2	268	147	3	172	74	2	340	220	2	425	275	2
16.00	218	120	2	241*	120*	3*	251	153	2	274	153	3	176	78	2	355	230	2	445	295	2
17.00	223	125	2	246*	125*	3*	257	159	2	280	159	3	179	81	2	355	230	2	445	295	2
18.00	228	130	2	251*	130*	3*	263	165	2	286	165	3	183	85	2	370	245	2	465	310	2
19.00	233	135	2	256	135	3	269	171	2	292	171	3	186	88	2	370	245	2	465	310	2
20.00	238	140	2	261	140	3	275	177	2	298	177	3	212	91	3	385	260	2	490	325	2
21.20	243	145	2	266	145	3	282	184	2	305	184	3	216	95	3	385	260	3	490	325	3
22.40	248	150	2	271	150	3	289	191	2	312	191	3	219	98	3	405	270	3	515	345	3
23.02	253	155	2	276	155	3	296	198	2	319	198	3	222	101	3	405	270	3	515	345	3
23.60	276	155	3	304*	155*	4*	319	198	3	347	198	4	222	101	3	425	270	3	535	345	3
25.00	281	160	3	309*	160*	4*	327	206	3	355	206	4	225	104	3	440	290	3	555	365	3
26.50	286	165	3	314*	165*	4*	335	214	3	363	214	4	256	107	4	440	290	3	555	365	3
28.00	291	170	3	319	170	4	343	222	3	371	222	4	259	110	4	460	305	3	580	385	3
30.00	296	175	3	324	175	4	351	230	3	379	230	4	263	114	4	460	305	3	580	385	3
31.50	301	180	3	329	180	4	360	239	3	388	239	4	266	117	4	480	320	3	610	410	3
31.75	306	185	3	334	185	4	369	248	3	397	248	4	269	120	4	480	320	3	610	410	3
33.50	334	185	4	372*	185*	5*	397	248	4	435	248	5	269	120	4	505	320	4	635	410	4
35.50	339	190	4	377*	190*	5*	406	257	4				272	123	4	530	340	4	665	430	4
37.50	344	195	4	382*	195*	5*	416	267	4				276	127	4	530	340	4	665	430	4
40.00	349	200	4	387*	200*	5*	426	277	4				317	130	5	555	360	4	695	460	4
42.50	354	205	4	392	205	5	436	287	4				320	133	5	555	360	4	695	460	4
45.00	359	210	4	397	210	5	447	298	4				323	136	5	585	385	4	735	490	4
47.50	364	215	4	402	215	5	459	310	4							585	385	4	735	490	4
50.00	369	220	4	407	220	5	470	321	4							605	405	4	765	510	4
50.80	374	225	4	412	225	5	475*	326*	4*												
53.00	412	225	5	479*	225*	6*	513*	326*	5*												
56.00	417	230	5	484*	230*	6*	518*	331*	5*												
60.00	422	235	5	489*	235*	6*	523*	336*	5*												
63.00	427	240	5	494*	240*	6*															
67.00	432	245	5	499	245	6															
71.00	437	250	5	504	250	6															
75.00	442	255	5	509	255	6															
76.50	447	260	5	514	260	6															
80.00	514	260	6																		
85.00	519	265	6																		
90.00	524	270	6																		
95.00	529	275	6																		
100.00	534	280	6																		
106.00	539*	285*	6*																		

* Guhring std.

Guhring delivers twist drills to Guhring standard up to total length of 1000 mm Guhring no. 293, 298, 299, 563, 564, 565, 566


Twist Drills



Carbide twist drills (Ratio drills)

Carbide twist drills (Ratio drills) DIN 6537

Applies to solid carbide twist drills with 2 or 3 cutting edges and straight shank to DIN 6535

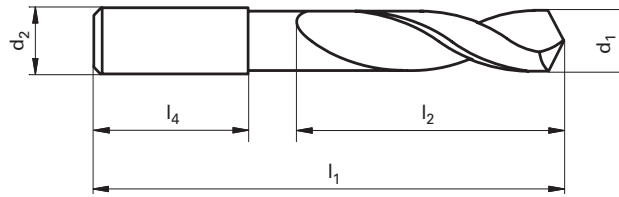


Dimensions in mm

nom. Ø-range up to d1m7	shank Ø d2h6	Ratio drills for 3 x D		Ratio drills for 5 x D		shank length l4
		overall length l1	max. flute length l2	overall length l1	max. flute length l2	
2.9...3.75	6	62	20	66	28	36
4.75	6	66	24	74	36	36
6.00	6	66	28	82	44	36
7.00	8	79	34	91	53	36
8.00	8	79	41	91	53	36
10.00	10	89	47	103	61	40
12.00	12	102	55	118	71	45
14.00	14	107	60	124	77	45
16.00	16	115	65	133	83	48
18.00	18	123	73	143	93	48
20.00	20	131	79	153	101	50

Carbide twist drills (Ratio drills) DIN 6538

Applies to twist drills with brazed carbide tip or head with reinforced straight shank (steel) to DIN 6535. The brazed head can be a part or the complete cutting portion.

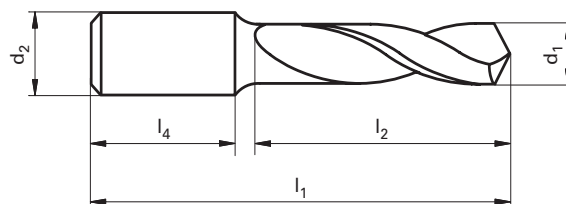

Dimensions in mm

nom. Ø-range up to d1h7	shank Ø d2h6	Ratio drills for 3 x D		Ratio drills for 5 x D		Ratio drills for 7 x D		shank length l4
		overall length l1	max. flute length l2	overall length l1	max. flute length l2	overall length l1	max. flute length l2	
9.5...12.0	16	103	51	127	75	151	99	48
14.0	16	111	59	139	87	167	115	48
16.0	20	122	68	154	100	186	132	50
18.0	20	130	76	166	112	202	148	50
20.0	25	144	84	184	124	224	164	56
22.0	25	153	93	197	137	241	181	56
24.0	25	161	101	209	149	257	197	56
26.0	32	174	110	226	162	278	214	60
28.0	32	182	118	238	174	294	230	60
30.0	32	190	126	250	186	310	246	60


Twist Drills



Carbide twist drills (Ratio drills)

Carbide twist drills (Ratio drills) DIN 6539

Applies to solid carbide twist drills with parallel shank, i.e. equal nom. drill and shank diameter.

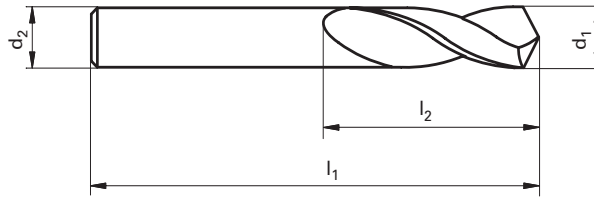


Dimensions in mm

nom. Ø-range up to (= shank Ø d2) d1	overall length		flute length	
	l1	l2	l1	l2
1.90...2.12	38	12		
2.36	40	13		
2.65	43	14		
3.00	46	16		
3.35	49	18		
3.75	52	20		
4.25	55	22		
4.75	58	24		
5.30	62	26		
6.00	66	28		
6.70	70	31		
7.50	74	34		
8.00	79	37		
8.50	79	37		
9.50	84	40		

nom. Ø-range up to (= shank Ø d2) d1	overall length		flute length	
	l1	l2	l1	l2
10.00	89	43		
10.60	89	43		
11.80	95	47		
12.00	102	51		
13.20	102	51		
14.00	107	54		
15.00	111	56		
16.00	115	58		
17.00	119	60		
18.00	123	62		
19.00	127	64		
20.00	131	66		




Straight shank subland drills, 90° step angle

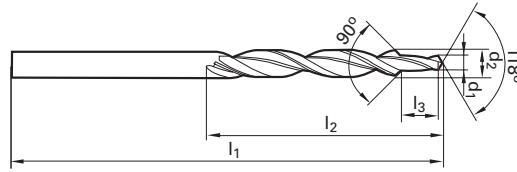

body Ø d2 h8 mm	step Ø d1 h9 mm	overall length l1 mm	flute length l2 mm	step length l3 mm	for thread	range of application
HSS DIN 8378/ Carbide Guhring std.						
3.4	2.5	70	39	8.8	M 3	For tapping size holes to DIN 336 and countersinks in accordance with clearance holes to DIN-ISO 273 (old) and DIN EN 20273 »medial tolerance«.
4.5	3.3	80	47	11.4	M 4	
5.5	4.2	93	57	13.6	M 5	
6.6	5.0	101	63	16.5	M 6	
9.0	6.8	125	81	21.0	M 8	
11.0	8.5	142	94	25.5	M10	
13.5	10.2	160	108	30.0	M12	
DIN 8374 for countersinks, fine tolerance						
6.0	3.2	93	57	9.0	M 3	For clearance holes to DIN-ISO 273 (old), DIN EN 20273 »fine tolerance« and screwhead countersinks form A and B to DIN 74 part 1 (old) »fine tolerance« and screwhead countersinks to DIN 74 form F. For screws to DIN 963 (old) and DIN 964 (old).
8.0	4.3	117	75	11.0	M 4	
10.0	5.3	133	87	13.0	M 5	
11.5	6.4	142	94	15.0	M 6	
15.0	8.4	169	114	19.0	M 8	
19.0	10.5	198	135	23.0	M10	
Guhring std. for countersinks, medial tolerance						
6.6	3.4	101	63	9.0	M 3	For clearance holes to DIN-ISO 273 (old) and screwhead countersinks form A and B to DIN 74 part 1 (old) »medial tolerance«. For screws to DIN 963 (old) and DIN 964 (old).
9.0	4.5	125	81	11.0	M 4	
11.0	5.5	142	94	13.0	M 5	
13.0	6.6	151	101	15.0	M 6	
17.2	9.0	191	130	19.0	M 8	
DIN 8374 for countersinks, medial tolerance						
7.5	3.4	109	69	9.0	M 3	For clearance holes to DIN-ISO 273 (old) and screwhead countersinks form A and B to DIN 74 part 1 (old) »medial tolerance«. For screws to DIN 963 (old) and DIN 964 (old).
9.7	4.5	133	87	11.0	M 4	
12.0	5.5	151	101	13.0	M 5	
14.5	6.6	169	114	15.0	M 6	
19.9	9.0	198	135	19.0	M 8	



Straight shank subland drills, 180° step angle

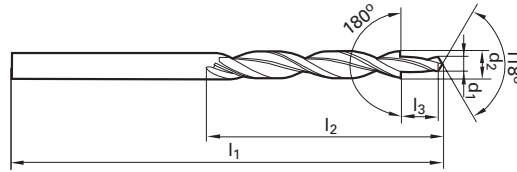


body Ø d2 h8 mm	step Ø d1 h9 mm	overall length l1 mm	flute length l2 mm	step length l3 mm	for thread	range of application
HSS DIN 8376/ Carbide Guhring std.						
6.0**	3.4	93**	57**	9.0	M 3	For clearance holes to DIN-ISO 273 (old), DIN EN 20273 »medial tolerance«, screwhead countersinks to DIN 974-1 and screwhead countersinks form H, J and K to DIN 74 part 2 (old): »medial tolerance«. For screws to DIN 84 (old), 912 (old), 6912, 7513 and DIN 7984.
6.5	3.4	101	63	9.0	M 3	
8.0	4.5	117	75	11.0	M 4	
10.0	5.5	133	87	13.0	M 5	
11.0	6.6	142	94	15.0	M 6	
15.0	9.0	169	114	19.0	M 8	
18.0	11.0	191	130	23.0	M10	
Guhring std.						
6.0	3.2	93	57	9.0	M 3	For clearance holes to DIN-ISO 273 (old) and screwhead countersinks form H, J and K to DIN 74 part 2 (old): »fine tolerance«. For screws to DIN 84 (old), 912 (old), 6912, 7513 and DIN 7984.
8.0	4.3	117	75	11.0	M 4	
Guhring std. for countersinks, fine tolerance (old*)						
5.9	3.2	93	57	11.0	M 3	For screws to DIN 84 (old), DIN 912 (old) and DIN 6912. For old type screwhead countersinks form H, J and K to DIN 75 part 2: »fine tolerance«.
7.4	4.3	109	69	13.0	M 4	
9.4	5.3	125	81	16.0	M 5	
10.4	6.4	133	87	19.0	M 6	
13.5	8.4	160	108	22.0	M 8	
16.5	10.5	184	125	25.0	M10	
Guhring std. for countersinks, medial tolerance (old*)						
8.0	4.8	117	75	13.0	M 3	For screws to DIN 84 (old), DIN 912 (old) and DIN 6912. For old type screwhead countersinks form H, J and K to DIN 75 part 2: »medial tolerance«.
10.0	5.8	133	87	16.0	M 4	
11.0	7.0	142	94	19.0	M 5	
14.5	9.5	169	114	22.0	M 6	
17.5	11.5	191	130	25.0	M 8	

* DIN 75, part 2; ** Guhring std




Morse taper subland drills, 90° step angle

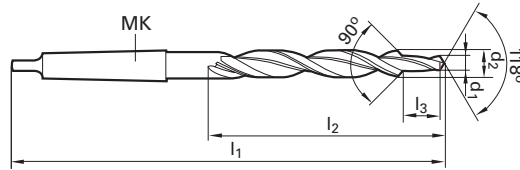

body Ø d2 h8 mm	step Ø d1 h9 mm	overall length l1 mm	flute length l2 mm	Morse taper MK	step length l3 mm	for thread	range of application
Guhring std.							
11.0	5.5	175	94	1	13.0	M 5	For clearance holes to DIN-ISO 273 (old), DIN EN 20273 »medial tolerance«, screwhead countersinks to DIN 74 form F and screwhead countersinks form A and B to DIN 74 part 1 (old) »medial tolerance«. For screws to DIN 963 (old) and DIN 964 (old).
13.0	6.6	182	101	1	15.0	M 6	
17.2	9.0	228	130	2	19.0	M 8	
21.5	11.0	248	150	2	23.0	M10	
26.0	14.0	286	165	3	27.0	M12	
29.0	16.0	296	175	3	31.0	M14	
DIN 8375							
12.0	5.5	182	101	1	13.0	M 5	For clearance holes to DIN-ISO 273 (old), DIN EN 20273 »medial tolerance«, screwhead countersinks to DIN 74 form F and screwhead countersinks form A and B to DIN 74 part 1 (old) »medial tolerance«. For screws to DIN 963 (old) and DIN 964 (old).
14.5	6.6	---	108	1	15.0	M 6	
19.0	9.0	253	135	2	19.0	M 8	
23.0	11.0	248	155	2	23.0	M10	
Guhring std.							
11.5	6.4	175	94	1	15.0	M 6	For clearance holes to DIN-ISO 273 (old) and screwhead countersinks form A and B to DIN 74 part 1 (old) »fine tolerance«. For screws to DIN 963 (old) and DIN 964 (old).
15.0	8.4	212	114	2	19.0	M 8	
19.0	10.5	233	135	2	23.0	M10	
23.0	13.0	253	155	2	27.0	M12	
26.0	15.0	286	165	3	31.0	M14	
30.0	17.0	296	175	3	35.0	M16	
DIN 8379							
9.0	6.8	162	81	1	21.0	M 8	For tapping size holes to DIN 336, DIN EN 20273 »medial tolerance« and countersinks in accordance with clearance holes to DIN-ISO 273 (old).
11.0	8.5	175	94	1	25.5	M10	
13.5	10.2	189	108	1	30.0	M12	
15.5	12.0	218	120	2	34.5	M14	
17.5	14.0	228	130	2	38.5	M16	
20.0	15.5	238	140	2	43.5	M18	
22.0	17.5	248	150	2	47.5	M20	



Morse taper subland drills, 180° step angle

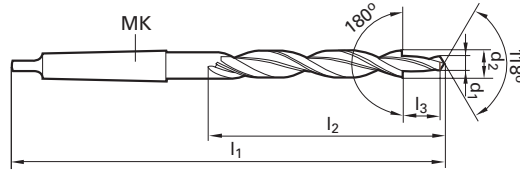

body Ø d2 h8 mm	step Ø d1 h9 mm	overall length l1 mm	flute length l2 mm	Morse taper MK	step length l3 mm	for thread	range of application
HSS DIN 8377/ Carbide Guhring std.							
10.0	5.5	168	87	1	13.0	M 5	For clearance holes to DIN-ISO 273 (old), DIN EN 20273 »medial tolerance«, screwhead countersinks to DIN 974-1 and screwhead countersinks form H, J and K to DIN 74 part 2 (old): »medial tolerance«. For screws to DIN 84 (old), 912 (old), 6912, 7513 and DIN 7984.
11.0	6.6	175	94	1	15.0	M 6	
15.0	9.0	212	114	2	19.0	M 8	
18.0	11.0	228	130	2	23.0	M10	
20.0	13.5	238	140	2	27.0	M12	
24.0	15.5	281	160	3	31.0	M14	
26.0	17.5	286	165	3	35.0	M16	
30.0	20.0	296	175	3	39.0	M18	
33.0	22.0	334	185	4	43.0	M20	
Guhring std.							
10.0	5.3	168	87	1	13.0	M 5	For clearance holes to DIN-ISO 273 (old) and screwhead countersinks form H, J and K to DIN 74 part 2 (old): »fine tolerance«. For screws to DIN 84 (old), 912 (old), 6912, 7513 and DIN 7984.
11.0	6.4	175	94	1	15.0	M 6	
15.0	8.4	212	114	2	19.0	M 8	
18.0	10.5	228	130	2	23.0	M10	
20.0	13.0	238	140	2	27.0	M12	
24.0	15.0	281	160	3	31.0	M14	
26.0	17.0	286	165	3	35.0	M16	
Guhring std. for countersinks, fine tolerance (old*)							
9.4	5.3	162	81	1	16.0	M 5	For screws DIN 84 (old), DIN 912 (old) and DIN 6912. For old countersinks form H, J and K to DIN 75 part 2: »fine tolerance«.
10.4	6.4	168	87	1	19.0	M 6	
13.5	8.4	189	108	1	22.0	M 8	
16.5	10.5	223	125	2	25.0	M10	
19.0	13.0	233	135	2	28.0	M12	
23.0	15.0	253	155	2	30.0	M14	
25.0	17.0	281	160	3	33.0	M16	
28.0	19.0	291	170	3	36.0	M18	
31.0	21.0	301	180	3	39.0	M 20	
Guhring std. for countersinks, medial tolerance (old*)							
10.0	5.8	168	87	1	16.0	M 5	For screws DIN 84 (old), DIN 6912. For old countersinks form H, J and K to DIN 75 part 2: »medial tolerance«.
11.0	7.0	175	94	1	19.0	M 6	
14.5	9.5	212	114	2	22.0	M 8	
17.5	11.5	228	130	2	25.0	M10	
20.0	14.0	238	140	2	28.0	M12	
24.0	16.0	281	160	3	30.0	M14	
26.0	18.0	286	165	3	33.0	M16	
29.0	20.0	296	175	3	36.0	M18	
33.0	23.0	334	185	4	39.0	M20	

inch	mm	inch	mm	inches	mm	inches	mm	MK	inches	mm	for thread	range of application
British Standard												
19/32	15.08	25/64	9.92	8 5/8	219	4 3/4	121	2	3/4	19.05	3/8 inch	For British Standard caphead screws.
21/32	16.67	29/64	11.51	8 3/4	222	4 7/8	124	2	7/8	22.22	7/16 inch	
25/32	19.84	33/64	13.10	9 3/8	238	5 1/2	140	2	1	25.40	1/2 inch	

* DIN 75, part 2



Straight shank core drills

Shell-core drills

diameter up to incl. mm	DIN 344					DIN 222		
	overall length mm	flute length mm	diameter up to incl. mm	overall length mm	flute length mm	nom. Ø up to incl. mm	overall length mm	nom. Ø of hole mm
4.25	96*	64*	11.70	173	125	35.5	45	13
4.75	102*	69*	13.20	184	134	45.0	50	16
5.30	108	74	14.00	194	142	53.0	56	19
6.00	116	80	15.00	202	147	63.0	63	22
6.70	124	86	16.00	211	153	75.0	71	27
7.50	133	93	17.00	218	159	90.0	80	32
8.50	142	100	18.00	226	165	101.6	90	40
9.50	151	107	19.00	234	171			
10.60	162	116	20.00	242	177			

Taper shank core drills

diameter up to incl. mm	DIN 343			DIN 1864		
	overall length mm	flute length mm	Morse taper	overall length mm	flute length mm	Morse taper
7.50	150*	69*	1*	174*	93*	1*
8.50	156*	75*	1*	181*	100*	1*
9.50	162	81	1	188	107	1
10.60	168	87	1	197	116	1
11.70	175	94	1	206	125	1
13.20	182	101	1	215	134	1
14.00	189	108	1	223	142	1
15.00	212	114	2	245	147	2
16.00	218	120	2	251	153	2
17.00	223	125	2	257	159	2
18.00	228	130	2	263	165	2
19.00	233	135	2	269	171	2
20.00	238	140	2	275	177	2
21.20	243	145	2	282	184	2
22.40	248	150	2	289	191	2
23.60	253	155	2	296	198	2
25.00	281	160	3	327	206	3
26.50	286	165	3	335	214	3
28.00	291	170	3	343	222	3
30.00	296	175	3	351	230	3
31.50	301	180	3	360	239	3
33.50	334	185	4			
35.50	339	190	4			
37.50	344	195	4			
40.00	349	200	4			
42.50	354	205	4			
45.00	359	210	4			
47.50	364	215	4			
50.00	369	220	4			

*Guhring std.

Micro-precision drills (total length 25 mm)

DIN 1899					
diameter up to incl. mm	shank Ø mm	flute length mm	diameter up to incl. mm	shank Ø mm	flute length mm
from 0.1 . . . 0.12	1.0	0.5	0.67	1.0	4.2
0.15	1.0	0.8	0.75	1.0	4.8
0.19	1.0	1.1	0.79	1.0	5.3
0.24	1.0	1.5	0.85	1.5	5.3
0.30	1.0	1.9	0.95	1.5	6.0
0.38	1.0	2.4	1.06	1.5	6.8
0.48	1.0	3.0	1.18	1.5	7.6
0.53	1.0	3.4	1.32	1.5	8.5
0.60	1.0	3.9	1.45	1.5	9.5



Coolant pressure and volumes

The illustrated optimum, good and minimum required coolant volume apply only to spiral-fluted Ratio drills type RT 100. In contrast to the pressure, which is a feature of the machine tool; the cooling system fitted to it and also the possibility of leakage, volume does not depend on the machine (fig. 1). The pressure figures given are therefore recommendations which serve only as guidelines.

Ratio drills type RT 80 with central coolant duct are subject to different standards (fig. 2). The diagrams shown are for Ratio drills in their most important application, machining of steel. But they are also guidelines for the machining of other materials, primarily because the highest coolant pressures are constantly required for the machining of steel. The effects of cooling using straight-fluted Ratio drills type RT 150 is particularly sensitive and is clearly demonstrated in the examples for particular workpiece materials. For example, the

loss in tool life through low pressures when machining grey cast iron is considerably higher than when machining AISi alloys. But this is only the case when the AISi alloy is short-chipping! The absolute necessary minimum pressure or good pressure should, when machining cast iron, be generally a little higher than for AISi machining (figures 3 and 4).

The recommended values are to be used only for drilling depths of up to approx. 5 x D. Deeper holes should be produced with tools having internal coolant ducts, as for example RT 150 GN, otherwise the production of deeper holes (depending on the material) becomes uneconomical.

Required coolant pressures
█ optimum pressure
█ good pressure
█ minimum pressure

Required coolant volumes
█ optimum volume
█ good volume
█ minimum volume

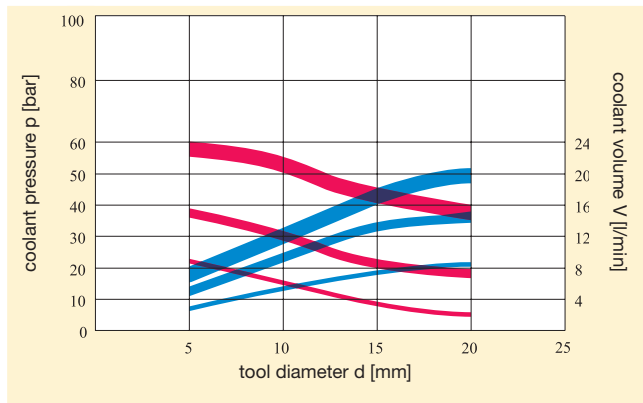


fig. 1: Required coolant pressures and volumes for RT 100 Ratio drills with internal spiral coolant ducts.

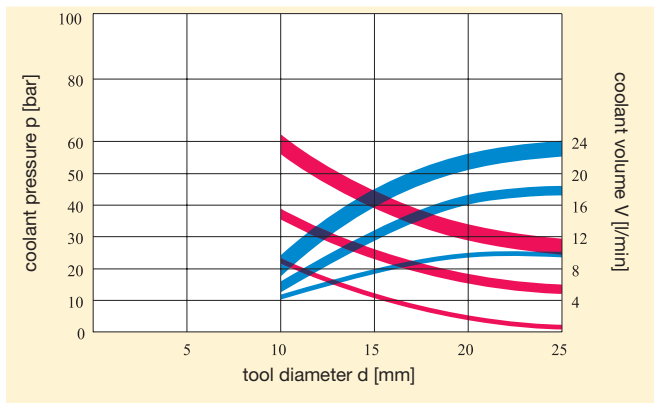


fig. 2: Required coolant pressures and volumes for RT 80 Ratio drills with central internal coolant duct.

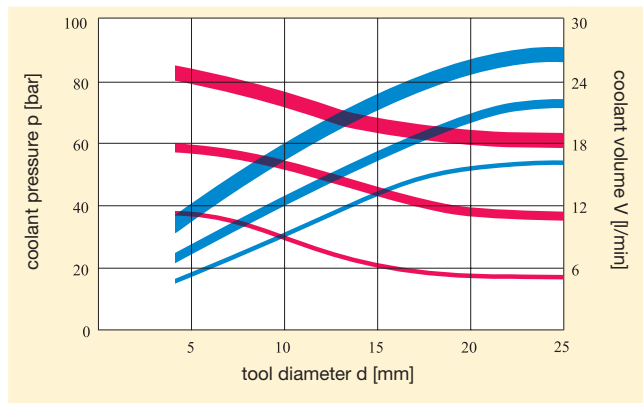


fig. 3: Required coolant pressures and volumes for straight-fluted Ratio drill type 150 GG when machining cast iron.

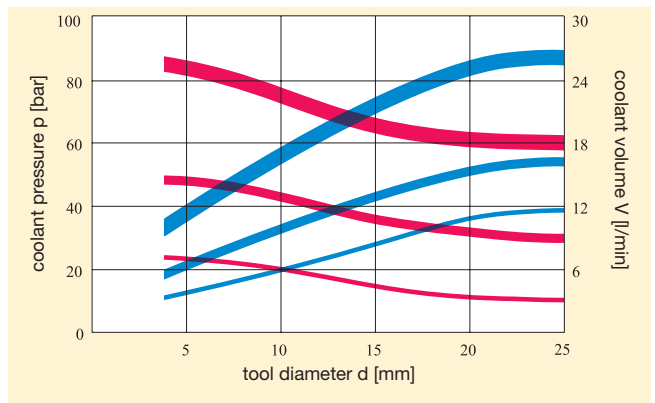


fig. 4: Required coolant pressures and volumes for straight-fluted Ratio drill type 150 GG when machining AISi7.




Typical hole quality characteristics

1. in 42CrMo4V, Ø 14.5 mm

HSS drills, type N
Guhring no. 651 **S**

vc = 25 m/min
f = 0.25 mm/rev.
+Rmax = 131.8 µm
-Rmax = -49.1 µm
actual D = 14.566 mm
dRmax = 103.5 µm
AV = 49.2 µm
Ra = 2.6 µm, Rz = 6.8 µm


IT12



Ratio drills, type RT 80
Guhring no. 1171 **S**

vc = 70 m/min
f = 0.25 mm/rev.
+Rmax = 42.7 µm
-Rmax = -29.6 µm
actual D = 14.515 mm
dRmax = 12.9 µm
AV = 35.3 µm
Ra = 1.4 µm, Rz = 4.31 µm


IT9



Ratio drills, type RT 100
Guhring no. 1181 **S**

vc = 70 m/min
f = 0.25 mm/rev.
+Rmax = 26.7 µm
-Rmax = -17.2 µm
actual D = 14.509 mm
dRmax = 5.2 µm
AV = 22.8 µm
Ra = 1.04 µm, Rz = 3.2 µm

IT8



The overall total of the maximum positive and negative deviations is the sum of the total run-out in relation to the black circle as measured on standard instruments (dRmax). The red lines at the hole centres indicate the direction and amplitude of the displacements AV (Axis Shifting) of the produced hole from the true centre point. The parameter showing the largest deviation is decisive for the IT quality class of the hole in relation to the tool diameter.


The black circle in the diagram represents the nominal hole diameter which the tool should ideally produce. The red circle indicates the form actually produced. The mean value of the radius of the red circle, i.e. the average diameter, is shown by the blue circle. (with our Ratio drills the average diameter is practically identical to the actual diameter produced).

2. in GGG40, Ø 10.0 mm

HSS drills, type N
Guhring no. 651 **S**

vc = 30 m/min
f = 0.2 mm/rev.
actual D = 10.077 mm
+Rmax = 106 µm
-Rmax = -28 µm
dRmax = 42 µm
AV = 68.5 µm
Ra = 3.7 µm, Rz = 17.2 µm


IT12



Ratio drills, type RT 100
Guhring no. 1181 **S**

vc = 90 m/min
f = 0.3 mm/rev.
actual D = 10.027 mm
+Rmax = 34 µm
-Rmax = -9.2 µm
dRmax = 6.5 µm
AV = 22.5 µm
Ra = 2.2 µm, Rz = 11.5 µm


IT9



Ratio drills, type RT 150 GG
Guhring no. 768 **O**

vc = 130 m/min
f = 0.2 mm/rev.
actual D = 9.994 mm
+Rmax = 11.5 µm
-Rmax = -18 µm
dRmax = 5 µm
AV = 14 µm
Ra = 1.99 µm, Rz = 11.2 µm

IT8





Tolerances

DIN 333	
Ø-range mm	tolerance zones mm
0.50 – 2.50	0 +0.14
3.15 – 5.00	0 +0.18
6.30 – 10.00	0 +0.22
12.50	0 +0.27

for Guhring nos. 285/286	
Ø-range mm	tolerance zones mm
1.00 – 1.25	0 +0.10
1.60 – 3.15	0 +0.15
3.15 – 10.00	0 +0.20

to B.S. 328	
Ø-range mm	tolerance zones mm
1.19 – 1.59	0 ±0.05
2.38 – 3.17	0 ±0.07
4.76	0 ±0.07
6.35 – 7.94	0 ±0.12

to B.S. 328	
Shank Ø-range mm	tolerance zones mm
3.17 – 4.76	-0.020
6.35	-0.025
7.94 – 11.11	-0.050
15.87 – 19.05	-0.050

to ASA	
Ø-range mm	tolerance zones mm
all	0 + 0.07 mm

Product no. index

Guhring no.	Standard range page	Discount group	Standard	Description	Tool material	Type	Form	Drilling depth
11	422	138	G.S.	Plastic stand for set of jobber drills				
36	422	138	G.S.	Cases for twist drill sets				
73	423	138	G.S.	Cases for twist drill sets				
128	438	138	G.S.	Stub drills with 16.0 mm dia. shank	HSCO	N		
129	439	138	G.S.	Stub drills with 25.4 mm dia. shank	HSCO	N		
136	439	138	G.S.	Stub drills with 25.4 mm dia. shank	HSCO	N		
145	311	140	G.S.	Basic holders for chamfer collars FR 90			FR 90	
195	424	130	338	Set of jobber drills in case	HSCO	VA		
200	422/424	130	338	Set of jobber drills	HSS/HSCO	N		
201	422/424	130	338	Set of jobber drills in case	HSS/HSCO	N		
204	472	138	340	Long series twist drills	HSS	N		
205	312	130	338	Jobber drills	HSS	N		
206	312	134	338	Jobber drills	HSS	H		
207	312	134	338	Jobber drills	HSS	W		
208	312	134	338	Jobber drills	HSS	N		
209	312	134	338	Jobber drills	HSS	H		
210	312	138	338	Jobber drills	HSS	W		
211	465	134	339	Bushing length twist drills	HSS	N		
217	472	132	340	Long series twist drills	HSS	N		
218	472	134	340	Long series twist drills	HSS	H		
219	472	134	340	Long series twist drills	HSS	W		
220	472	138	340	Long series twist drills	HSS	N		
221	472	138	340	Long series twist drills	HSS	H		
223	382	132	1897	Stub drills	HSS	N		
224	382	138	1897	Stub drills	HSS	H		
225	382	138	1897	Stub drills	HSS	W		
226	382	134	1897	Stub drills	HSS	N		
227	382	138	1897	Stub drills	HSS	H		
228	382	138	1897	Stub drills	HSS	W		
229	525	138	345	Twist drills	HSS	N		
230	615	138	G.S.	Oil feed adapters				
235	497	134	1869 R1	Extra length twist drills, series 1	HSS	N		
236	502	134	1869 R2	Extra length twist drills, series 2	HSS	N		
237	505	138	1869 R3	Extra length twist drills, series 3	HSS	N		
240	313	132	338	Jobber drills	HSS	N		
242	508	136	G.S.	Extra length twist drills	HSS	GT 100		
243	509	138	G.S.	Extra length twist drills	HSS	GT 100		
244	510	138	G.S.	Extra length twist drills	HSS	GT 100		
245	525	132	345	Twist drills	HSS	N		
246	525	138	345	Twist drills	HSS	H		
247	525	138	345	Twist drills	HSS	W		
248	525	138	345	Twist drills	HSS	N		
251	545	138	346	Twist drills	HSS	N		
257	547	132	341	Bushing length twist drills	HSS	N		
266	563	134	1870 R1	Extra length twist drills, series 1	HSS	N		
267	566	138	1870 R2	Extra length twist drills, series 2	HSS	N	A	
268	437	138	G.S.	Jobber drills with 12.7 mm dia. shank	HSS	N	A	
269	555	138	G.S.	Oil feed drills, short	HSS	N		
270	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSS	N		
271	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSS	N		
272	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSS	N		
274	576	138	G.S.	Stepped drills for centering to DIN 332	HSS	N		
280	598	138	G.S.	Center drills without flat	HSS		A	
281	596	138	333	Center drills without flat	HSS		A	
282	596	138	333	Center drills without flat	HSS		A	
283	596	138	333	Center drills without flat	HSS		R	
284	596	138	333	Center drills without flat	HSS		R	
285	599	138	G.S.	Center drills without flat	HSS		B	
287	601	138	333	Center drills with flat	HSS		A	
288	601	138	333	Center drills with flat	HSS		R	
289	603	138	G.S.	Center drills with flat	HSS		B	
292	593	138	328	Center drills without flat	HSS		A	
293	570	138	G.S.	Extra length twist drills	HSS	GT 100		
294	593	138	328	Center drills without flat	HSS		A	
298	572	138	G.S.	Extra length twist drills	HSS	GT 100		
299	573	138	G.S.	Extra length twist drills	HSS	GT 100		
301	446	134	1899	Micro-precision drills without oil feed	HSS-E-PM	N		
303	446	138	1899	Micro-precision drills without oil feed	HSS-E-PM	N		
305	350	134	338	Jobber drills	HSCO	N		
308	350	138	338	Jobber drills	HSCO	N		
311	465	138	339	Bushing length twist drills	HSCO	N		
317	473	134	340	Long series twist drills	HSCO	N		
329	383	134	1897	Stub drills	HSCO	GV 120		
330	383	138	1897	Stub drills	HSCO	GV 120		
336	473	136	340	Long series twist drills	HSCO	GT 100		
345	537	134	345	Twist drills	HSCO	N		
351	545	138	346	Twist drills	HSCO	N		
357	547	138	341	Bushing length twist drills	HSCO	N		

Product no. index

Guhring no.	Standard range page	Discount group	Standard	Description	Tool material	Type	Form	Drilling depth
363	523	134	G.S.	Jobber drills	HSCO	GV 120		
370	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSCO	GT 100		
371	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSCO	GT 100		
372	558	138	G.S.	Oil feed drills, flute length to DIN 341	HSCO	GT 100		
374	561	138	G.S.	Oil feed drills, flute length to DIN 1870	HSCO	GT 100		
375	561	138	G.S.	Oil feed drills, flute length to DIN 1870	HSCO	GT 100		
376	561	138	G.S.	Oil feed drills, flute length to DIN 1870	HSCO	GT 100		
378	579	138	G.S.	Straight shank short step drills	HSS	N		
379	580	138	G.S.	Straight shank short step drills	HSS	N		
380	581	138	G.S.	Straight shank short step drills	HSS	N		
381	595	138	333	Center drills without flat	HSCO		A	
390	464	136	G.S.	Oil feed drills	HSS	N		
396	473	137	340	Long series twist drills	HSCO	GT 100		
501	472	136	340	Long series twist drills	HSS	GT50		
502	497	136	1869 R1	Extra length twist drills, series 1	HSS	GT 100		
503	502	136	1869 R2	Extra length twist drills, series 2	HSS	GT 100		
504	505	136	1869 R3	Extra length twist drills, series 3	HSS	GT 100		
505	547	138	341	Bushing length twist drills	HSS	GT50		
506	473	138	340	Long series twist drills	HSS	GT 100		
511	432	115	G.S.	Twist drills with oversize straight shank	HSCO	GU 500		
512	426	115	G.S.	Twist drills with oversize straight shank	HSCO	GU 500		
513	430	115	G.S.	Twist drills with oversize straight shank	HSS-E-PM	GT 500		
514	584	138	G.S.	Straight shank subland drills	HSS	N		
515	414	115	1897	Stub drills	HSS-E-PM	GT 500		
520	589	138	G.S.	Taper shank subland drills	HSS	N		
523	554	138	G.S.	Bushing length twist drills	HSS	N		
524	497	138	1869 R1	Extra length twist drills, series 1	HSS	GT50		
525	563	138	1870 R1	Extra length twist drills, series 1	HSS	GT50		
526	563	136	1870 R1	Extra length twist drills, series 1	HSS	GT 100		
527	566	136	1870 R2	Extra length twist drills, series 2	HSS	GT 100		
528	502	138	1869 R2	Extra length twist drills, series 2	HSS	GT50	A	
529	505	138	1869 R3	Extra length twist drills, series 3	HSS	GT50		
531	516	138	1898	Taper pin drills	HSS	N		
532	574	138	1898	Taper pin drills	HSS	N		
533	605	138	344	Straight shank core drills	HSS	N		
534	609	138	343	Taper shank core drills	HSS	N		
535	473	136	340	Long series twist drills	HSS	GT 100		
536	582	138	8374	Straight shank subland drills	HSS	N	A	
537	586	138	G.S.	Taper shank subland drills	HSS	N		
538	583	138	8376	Straight shank subland drills	HSS	N		
539	588	138	8377	Taper shank subland drills	HSS	N		
540	585	138	8378	Straight shank subland drills	HSS	N		
541	590	138	8379	Taper shank subland drills	HSS	N		
542	566	138	1870 R2	Extra length twist drills, series 2	HSS	GT50		
546	443	102	G.S.	142° NC-spotting drills	Solid carbide	N		
549	313	136	338	Jobber drills	HSS	GT 100		
550	313	138	338	Jobber drills	HSS	GT 100		
551	547	136	341	Bushing length twist drills	HSS	GT 100		
552	382	136	1897	Stub drills	HSS	GT 80		
553	382	138	1897	Stub drills	HSS	GT 80		
554	444	134	G.S.	Straight shank drills double-ended	HSS	DK 77		
555	614	138	1864	Taper shank core drills	HSS	N		
556	442	134	G.S.	120° NC-spotting drills	HSS	N		
557	440	134	G.S.	90° NC-spotting drills	HSS	N		
558	525	138	345	Twist drills	HSS	GT 100		
559	441	138	G.S.	90° NC-spotting drills	HSS	N		
560	313	138	338	Jobber drills	HSS	N		
561	465	138	339	Bushing length twist drills	HSS	N		
563	569	138	G.S.	Extra length twist drills	HSS	GT 100		
564	570	138	G.S.	Extra length twist drills	HSS	GT 100		
565	571	138	G.S.	Extra length twist drills	HSS	GT 100		
566	569	138	G.S.	Extra length twist drills	HSS	GT 100		
567	442	139	G.S.	120° NC-spotting drills	HSS	N		
568	440	135	G.S.	90° NC-spotting drills	HSS	N		
569	582	138	8374	Straight shank subland drills	HSS	N	B	
571	505	136	1869 R3	Extra length twist drills, series 3	HSCO	GT 100		
574	576	138	G.S.	Stepped drills for centering to DIN 332	HSS	N		
575	577	138	G.S.	Stepped drills for centering to DIN 332	HSS	N		
576	578	138	G.S.	Stepped drills for centering to DIN 332	HSS	N		
577	511	138	NAS907	Aircraft extension drills, 6 inches long	HSS	N		
578	514	138	NAS907	Aircraft extension drills, 12 inches long	HSS	N		
579	511	138	NAS907	Aircraft extension drills, 6 inches long	HSS	N		
580	514	138	NAS907	Aircraft extension drills, 12 inches long	HSS	N		
581	594	132	333	Center drills without flat	HSS		A	
582	594	138	333	Center drills without flat	HSS		A	
583	594	138	333	Center drills without flat	HSS		R	
584	594	138	333	Center drills without flat	HSS		R	
585	597	138	333	Center drills without flat	HSS		B	

Product no. index

Product no. index

Guhring no.	Standard range page	Discount group	Standard	Description	Tool material	Type	Form	Drilling depth
586	597	138	333	Center drills without flat	HSS		B	
587	600	138	333	Center drills with flat	HSS		A	
588	600	138	333	Center drills with flat	HSS		R	
589	602	138	333	Center drills with flat	HSS		B	
590	595	138	333	Center drills without flat	HSS		A	
591	597	138	333	Center drills without flat	HSS		B	
592	525	138	345	Twist drills	HSS	N		
594	591	138	B94.11 M	Center drills without flat	HSS		A	
595	592	138	B94.11 M	Center drills without flat	HSS		B	
605	350	134	338	Jobber drills	HSCO	Ti		
606	537	139	345	Twist drills	HSS	GT 100		
608	350	138	338	Jobber drills	HSCO	Ti		
611	245	109	6539	3-flute Ratio drills	Solid carbide	GS 200 U		5xD
613	595	133	333	Center drills without flat	HSS		A	
614	595	139	333	Center drills without flat	HSS		R	
617	473	134	340	Long series twist drills	HSCO	Ti		
618	497	136	1869 R1	Extra length twist drills, series 1	HSCO	GT 100		
619	502	138	1869 R2	Extra length twist drills, series 2	HSCO	GT 100		
620	563	138	1870 R1	Extra length twist drills, series 1	HSCO	GT 100		
621	566	138	1870 R2	Extra length twist drills, series 2	HSCO	GT 100		
622	350	136	338	Jobber drills	HSCO	GT 100		
623	547	138	341	Bushing length twist drills	HSCO	GT 100		
634	609	138	343	Taper shank core drills	HSCO	N		
635	613	138	1864	Taper shank core drills	HSCO	N		
636	582	138	G.S.	Straight shank subland drills	HSS	N		
637	586	138	G.S.	Taper shank subland drills	HSS	N		
638	582	138	G.S.	Straight shank subland drills	HSS	N		
639	587	138	G.S.	Taper shank subland drills	HSS	N		
645	537	138	345	Twist drills	HSCO	GT 100		
651	313	131	338	Jobber drills	HSS	N		
652	313	137	338	Jobber drills	HSS	GT 100		
653	383	133	1897	Stub drills	HSS	N		
654	537	133	345	Twist drills	HSS	N		
655	547	133	341	Bushing length twist drills	HSS	N		
656	547	139	341	Bushing length twist drills	HSS	GT 100		
657	350	135	338	Jobber drills	HSCO	Ti		
658	351	137	338	Jobber drills	HSCO	GT 100		
659	383	135	1897	Stub drills	HSCO	GV 120		
660	446	135	1899	Micro-precision drills without oil feed	HSS-E-PM	N		
661	537	139	345	Twist drills	HSCO	N		
662	537	139	345	Twist drills	HSCO	GT 100		
663	523	139	G.S.	Jobber drills	HSCO	GV 120		
664	313	139	338	Jobber drills	HSS	N		
665	313	139	338	Jobber drills	HSS	GT 100		
666	465	139	339	Bushing length twist drills	HSS	N		
667	473	133	340	Long series twist drills	HSS	N		
668	473	137	340	Long series twist drills	HSS	GT 100		
669	473	139	340	Long series twist drills	HSCO	Ti		
670	497	137	1869 R1	Extra length twist drills, series 1	HSS	GT 100		
671	502	139	1869 R2	Extra length twist drills, series 2	HSS	GT 100		
672	383	139	1897	Stub drills	HSS	N		
701	446	102	G.S.	Micro-precision drills without oil feed	Solid carbide	N		
702	420	102	G.S.	Stub drills	Solid carbide	N		
703	517	102	8037	Carbide-tipped twist drill	Carbide	N		
704	517	102	8038	Carbide-tipped twist drill	Carbide	N		
705	575	102	8041	Carbide-tipped twist drill	Carbide	N		
706	496	102	G.S.	Long series twist drills	Solid carbide	N		
707	521	102	G.S.	Carbide tipped spade drills	Carbide	H		
710	376	102	G.S.	Jobber drills	Carbide	Duro 150		
716	522	102	G.S.	Masonry drills	Carbide	N		
723	440	102	G.S.	90° NC-spotting drills	Solid carbide	N		
724	442	102	G.S.	120° NC-spotting drills	Solid carbide	N		
729	608	102	G.S.	Taper shank core drills	Carbide	N		
730	414	102	6539	Stub drills	Solid carbide	N		3xD
731	245	109	6539	3-flute Ratio drills	Solid carbide	GS 200 U		5xD
732	376	102	G.S.	Jobber drills	Solid carbide	N		
736	595	102	G.S.	Center drills without flat	Solid carbide		A	
738	583	102	G.S.	Straight shank subland drills	Solid carbide	N		
739	585	102	G.S.	Straight shank subland drills	Solid carbide	N		
745	245	109	6539	3-flute Ratio drills	Solid carbide	GS 200 G		5xD
750	604	102	G.S.	Straight shank core drills	Carbide	N		
768	200	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		4xD
769	223	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		7xD
770	225	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		10xD
773	227	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GN		15xD
1025	245	109	6539	3-flute Ratio drills	Solid carbide	GS 200 G		5xD
1027	245	109	6539	3-flute Ratio drills	Solid carbide	GS 200 F		5xD
1032	249	109	G.S.	3-flute stepped Ratio drills	Solid carbide	GS 200 G		3xD

Product no. index

Guhring no.	Standard range page	Discount group	Standard	Description	Tool material	Type	Form	Drilling depth
1047	293/307	141	G.S.	Interchangeable inserts RT 800	Solid carbide	RT 800 WP		
1052	311	140	G.S.	Chamfer collar FR 90		FR 90		
1053	311	140	G.S.	Attachments for chamfer collars				
1054	311	140	G.S.	Attachments for chamfer collars				
1055	310	140	G.S.	Attachments for chamfer collars				
1056	310	142	G.S.	Indexable inserts for FR 90	Solid carbide			
1071	295/307	140	G.S.	Clamping screws RT 800				
1072	311	140	G.S.	Clamping screws for chamfer collars				
1101	557	138	G.S.	Oil feed drills, flute length to DIN 341	HSS	N		
1131	462	134	G.S.	Oil feed drills	HSCO	GT 80 IK		
1132	462	135	G.S.	Oil feed drills	HSCO	GT 80 IK		
1146	351	138	338	Jobber drills	M42	N		
1147	579	138	G.S.	Straight shank short step drills	HSS	N		
1149	520	102	G.S.	Kevlar drills	Solid carbide	N		
1156	310	142	G.S.	Indexable inserts for FR 90	Solid carbide			
1171	236	128	6538K	Ratio drills with oil feed	Carbide	RT 80 U		3xD
1172	239	128	6538M	Ratio drills with oil feed	Carbide	RT 80 U		5xD
1173	241	128	6538L	Ratio drills with oil feed	Carbide	RT 80 U		7xD
1180	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 F		3xD
1181	186	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 U		3xD
1182	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 F		5xD
1183	204	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 U		5xD
1184	168	121	6537K	Ratio drills without oil feed	Solid carbide	RT 100 U		3xD
1221	351	137	338	Jobber drills	HSCO	GT 100		
1222	537	139	345	Twist drills	HSCO	GT 100		
1223	351	137	338	Jobber drills	HSCO	GT 100		
1224	543	139	345	Twist drills	HSCO	GT 100		
1228	383	137	1897	Stub drills	HSCO	GT 80		
1242	179	121	6539	Ratio drills without oil feed	Solid carbide	RT 100 U		3xD
1243	183	121	G.S.	Ratio drills without oil feed	Solid carbide	RT 100 U		5xD
1259	414	138	1897	Stub drills	M42	N		
1260	351	134	338	Jobber drills	HSCO	VA		
1261	383	138	1897	Stub drills	HSCO	VA		
1262	543	134	345	Twist drills	HSCO	VA		
1612	285/298/307/311	140	G.S.	Torx screwdriver				
1660	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 F		3xD
1662	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 F		5xD
1663	204	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 U		5xD
1702	179	121	6539	Ratio drills without oil feed	Solid carbide	RT 100 F		3xD
1946	436	102	6537K	Twist drills with oversize straight shank	Solid carbide	H		
2047	351	134	338	Jobber drills	HSCO	P2000		
2048	383	135	1897	Stub drills	HSCO	P2000		
2049	425	134	338	Set of jobber drills in case	HSCO	P2000		
2050	425	134	1897	Set of jobber drills in case	HSCO	P2000		
2456	313	135	338	Jobber drills	HSS	N		
2457	313	137	338	Jobber drills	HSS	GT 100		
2458	351	135	338	Jobber drills	HSCO	Ti		
2459	351	137	338	Jobber drills	HSCO	GT 100		
2460	383	133	1897	Stub drills	HSS	N		
2461	383	135	1897	Stub drills	HSCO	GV 120		
2462	473	137	340	Long series twist drills	HSS	GT 100		
2463	414	102	6539	Stub drills	Solid carbide	N		
2464	376	102	G.S.	Jobber drills	Solid carbide	N		
2468	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 F		3xD
2469	186	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 U		3xD
2470	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 F		5xD
2471	204	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 U		5xD
2472	168	121	6537K	Ratio drills without oil feed	Solid carbide	RT 100 U		3xD
2473	179	121	6539	Ratio drills without oil feed	Solid carbide	RT 100 U		3xD
2474	183	121	G.S.	Ratio drills without oil feed	Solid carbide	RT 100 U		5xD
2475	168	121	6537K	Ratio drills without oil feed	Solid carbide	RT 100 F		3xD
2477	186	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 U		3xD
2478	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 F		5xD
2479	204	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 U		5xD
2480	168	121	6537K	Ratio drills without oil feed	Solid carbide	RT 100 U		3xD
2485	291/307	141	G.S.	Interchangeable inserts RT 800	Solid carbide	RT 800 WP		
2498	383	137	1897	Stub drills	HSCO	GT 80		
2711	218	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 U		7xD
2712	174	121	6537L	Ratio drills without oil feed	Solid carbide	RT 100 F		5xD
2713	243	109	6537L	3-flute Ratio drills	Solid carbide	FT 200 G		5xD
2717	174	121	6537L	Ratio drills without oil feed	Solid carbide	RT 100 U		5xD
2719	174	121	6537L	Ratio drills without oil feed	Solid carbide	RT 100 U		5xD
2747	289/307	141	G.S.	Interchangeable inserts RT 800	Solid carbide	RT 800 WP		
2996	174	121	6537L	Ratio drills without oil feed	Solid carbide	RT 100 U		5xD
2997	351	135	338	Jobber drills	HSCO	N		
3899	453	102	G.S.	Micro-precision drills without oil feed	Solid carbide	N		
4044	218	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 U		7xD
4045	218	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 U		7xD

Product no. index

Product no. index

Guhring no.	Standard range page	Discount group	Standard	Description	Tool material	Type	Form	Drilling depth
4071	282	140	G.S.	Clamping screws HT 800				
4072	310	140	G.S.	Attachments for chamfer collars				
4104	306	114	G.S.	Serrated lock washer				
4105	265	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		1xD
4106	250	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		1,5xD
4107	253	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		3xD
4108	256	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		5xD
4109	259	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		7xD
4110	262	140	G.S.	Tool holders for interchangeable inserts HT 800		HT 800 WP		10xD
4111	274	141	G.S.	Interchangeable inserts HT 800	Solid carbide	HT 800 WP		
4112	266	141	G.S.	Interchangeable inserts HT 800	Solid carbide	HT 800 WP		
4113	267	141	G.S.	Interchangeable inserts HT 800	Solid carbide	HT 800 WP		
4114	267	141	G.S.	Interchangeable inserts HT 800	Solid carbide	HT 800 WP		
4115	267	141	G.S.	Interchangeable inserts HT 800	Solid carbide	HT 800 WP		
4142	301	114	G.S.	LT 800 basic holder		LT 800		
4144	301	114	G.S.	LT 800 basic holder		LT 800		
4148	302	114	G.S.	LT 800 extension		LT 800		3xD
4149	302	114	G.S.	LT 800 extension		LT 800		3xD
4150	303	114	G.S.	LT 800 drill heads		LT 800		1xD
4160	305	114	G.S.	Cartridges LT 800 for indexable inserts		LT 800		
4164	304	114	G.S.	LT 800 retention spindles		LT 800		
4166	308	114	G.S.	Clamping screws with countersink 75°				
4168	306	114	G.S.	LT 800 distance piece sets		LT 800		
4170	308	142	G.S.	Indexable inserts LTT	Solid carbide			
4171	308	142	G.S.	Indexable inserts LTT	Solid carbide			
4172	308	142	G.S.	Indexable inserts LTT	Solid carbide			
4173	308	142	G.S.	Indexable inserts LTT	Solid carbide			
4179	308	142	G.S.	Indexable inserts CCHX	Solid carbide			
4180	308	142	G.S.	Indexable inserts CCHX	Solid carbide			
4181	308	142	G.S.	Indexable inserts CCHX	Solid carbide			
4182	308	142	G.S.	Indexable inserts CCHX	Solid carbide			
4188	304	114	G.S.	Torx socket sets				
4189	305	114	G.S.	Clamping screws for tool system T 800				
4355	300	114	G.S.	HSK-A reduction tools HSK-C				
4510	299	114	G.S.	Basic adaptors VDI holders / HSK-C				
4512	299	114	G.S.	ISO-taper basic adaptors DIN 69871 / HSK-C				
4549	300	114	G.S.	Extensions HSK-A/HSK-C				
4907	305	114	4762	Hexagon socket clamping screws				
4912	311	114	G.S.	Hexagon allen keys for holding				
4915	283/296/304/307	114	G.S.	Torque wrenches				
4917	284/297/307	140	G.S.	Torx socket sets				
5242	286	140	G.S.	Tool holders for interchangeable inserts RT 800		RT 800 WP		3xD
5243	287	140	G.S.	Tool holders for interchangeable inserts RT 800		RT 800 WP		5xD
5248	288	140	G.S.	Tool holders for interchangeable inserts RT 800		RT 800 WP		7xD
6068	200	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		4xD
6069	223	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		7xD
6070	225	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 150 GG		10xD
6128	281/308	122	G.S.	Clamping screws HT 800				
6400	455	164	G.S.	Micro-precision drills without oil feed	Solid carbide	N		4xD
6401	457	164	G.S.	Micro-precision drills without oil feed	Solid carbide	N		7xD
6408	459	164	G.S.	Micro-precision drills with oil feed	Solid carbide	N		8xD
6412	461	164	G.S.	Micro-precision drills with oil feed	Solid carbide	N		15xD
6501	205	165	6537L	Ratio drills with oil feed	Solid carbide	RT 100 R		5xD
6502	218	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 R		7xD
6509	228	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 T		15xD
6511	230	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 T		20xD
6512	232	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 T		25xD
6513	234	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 T		30xD
6514	235	165	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 T		40xD
7632	280	142	G.S.	Countersinking insert HT 800	Solid carbide			
7635	278	142	G.S.	Countersinking insert HT 800	Solid carbide			
7645	279	142	G.S.	Countersinking insert HT 800	Solid carbide			
8510	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 VA		3xD
8511	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 VA		5xD
8520	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 HF		3xD
8521	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 HF		5xD
8522	218	121	G.S.	Ratio drills with oil feed	Solid carbide	RT 100 HF		7xD
8524	168	121	6537K	Ratio drills without oil feed	Solid carbide	RT 100 HF		3xD
8610	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 VA		3xD
8611	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 VA		5xD
8620	187	121	6537K	Ratio drills with oil feed	Solid carbide	RT 100 HF		3xD
8621	205	121	6537L	Ratio drills with oil feed	Solid carbide	RT 100 HF		5xD